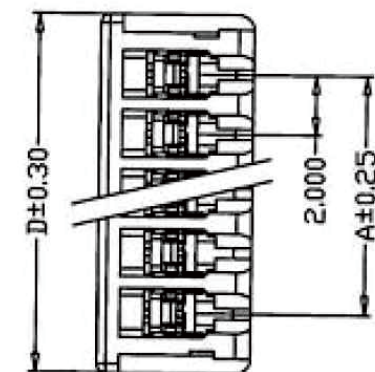


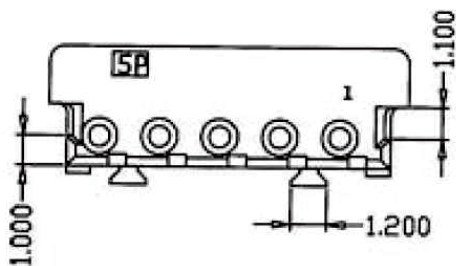


SPECIFICATIONS:

- Current rating: 1A AC,DC #28AWG
2A AC,DC #26AWG
3A AC,DC #24AWG
- Voltage rating: 125V AC,DC
- Temperature range: -30°C~+105°C
- Contact resistance: 10mΩMax.
- Insulation resistance: 1000MΩMin.
- Withstanding Voltage: 1000V AC/minute
- Material: Housing: Polyester UL94V-0
TER: Phosphor bronze, Tin plated
- AWG#26, #28 Insulation Diameter: 0.83mm-1.05mm
AWG#24 Insulation Diameter: 0.95mm-1.05mm

PDS	DIMA	DIMB	DIMC	DIMD
2	2.00	4.00	4.80	6.00
3	4.00	6.00	6.80	8.00
4	6.00	8.00	8.80	10.00
5	8.00	10.00	10.80	12.00
6	10.00	12.00	12.80	14.00
7	12.00	14.00	14.80	16.00
8	14.00	16.00	16.80	18.00
9	16.00	18.00	18.80	20.00
10	18.00	20.00	20.80	22.00
11	20.00	22.00	22.80	24.00
12	22.00	24.00	24.80	26.00
13	24.00	26.00	26.80	28.00
14	26.00	28.00	28.80	30.00
15	28.00	30.00	30.80	32.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

CT-Slxx-xx-LF
SERIES | LEADFREE
02~15WAY
24:24AWG
26:26AWG
28:28AWG
SOCKET IDC

DESCRIPTION: