
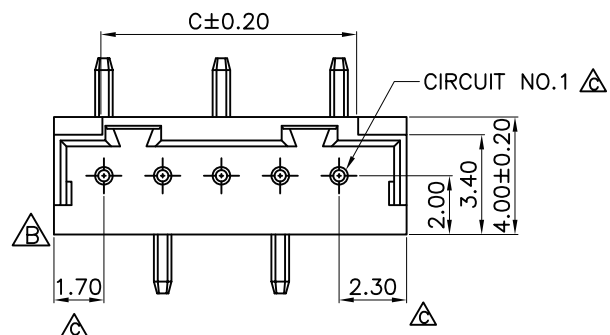
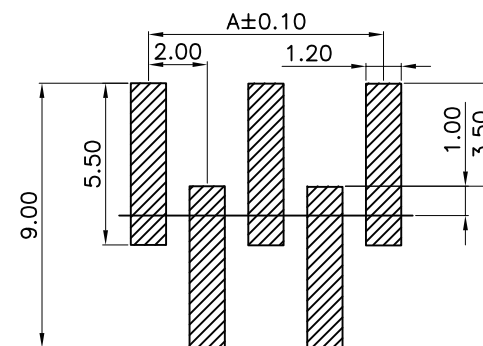



Specifications:

Current Rating:2.0A AC,DC
Voltage Rating:125V AC,DC
Contact Resisitance:20m ohm.Max
Insulation Resistance:1000M ohm.Min
Withstanding Voltage:500V AC/Minute
Operating Temperature Range:-40°C To +85°C
Material:
Insulator:High Temp.Plastic(Nylon 46 UL94V-0)
Defaul Color:White
Contact:Brass
Plated:Tin Plated

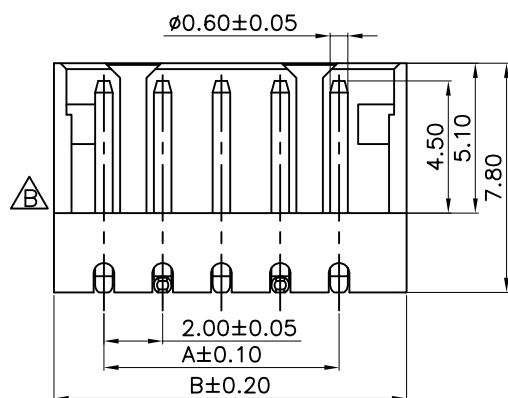

PCB Layout

Dimension:

Circuits	Dimension:			Circuits	Dimension:		
	A	B	C		A	B	C
02	2.00	6.00	2.70	06	10.00	14.00	10.70
03	4.00	8.00	4.70	07	12.00	16.00	12.70
04	6.00	10.00	6.70	08	14.00	18.00	14.70
05	8.00	12.00	8.70	09	16.00	20.00	16.70

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT/ mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ±

照片框

ORDER INFORMATION

CT-VX-xx-LF
SERIES LEADFREE
02~09 WAY
NON POST
180°SMT

DESCRIPTION: 2.00mm Wire To Board Wafer