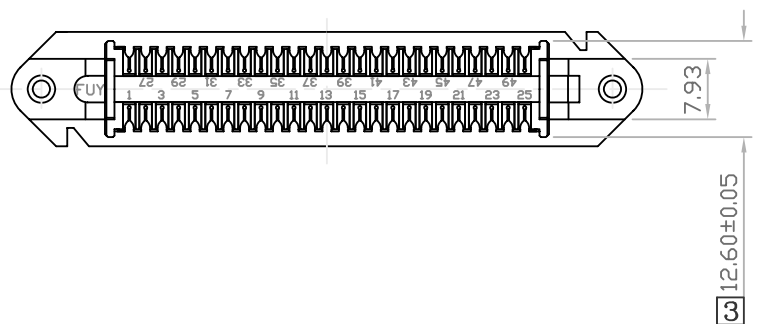
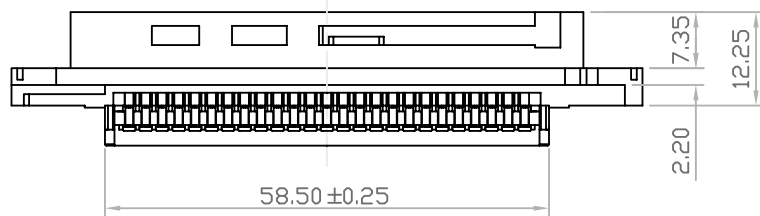
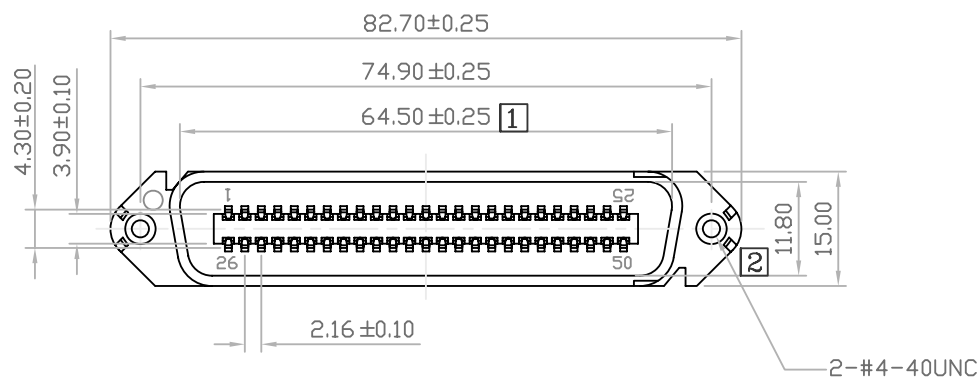


Material & Finish

INSULATOR: PBT




PIN CONTACT: PHOSPHOR BRONZE, GOLD FLASH PLATED

CURRENT RATING: 5 Amp

DIELECTRIC STRENGTH: 1000V for one minute

INSULATOR RESISTANCE: 1000MΩ Min. (at 500V DC)

TEMPERATURE: -55°C to +105°C

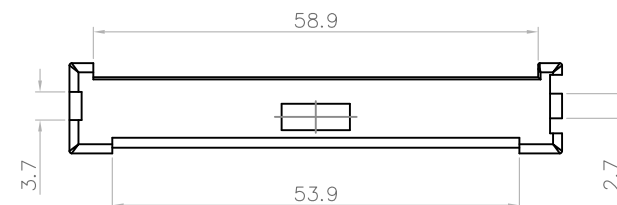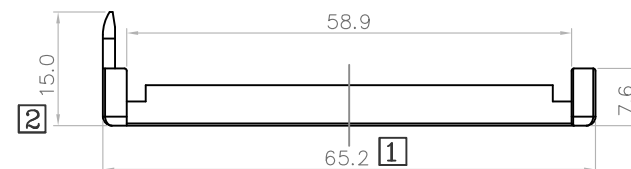

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40

.X ± 0.30

.XX ± 0.20

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

CTI-P-50-LF
SERIES | LEADFREE
50 WAY
MALE

DESCRIPTION: CENTRONIC I.D.C. TYPE 50PIN MALE ALL PLASTIC