

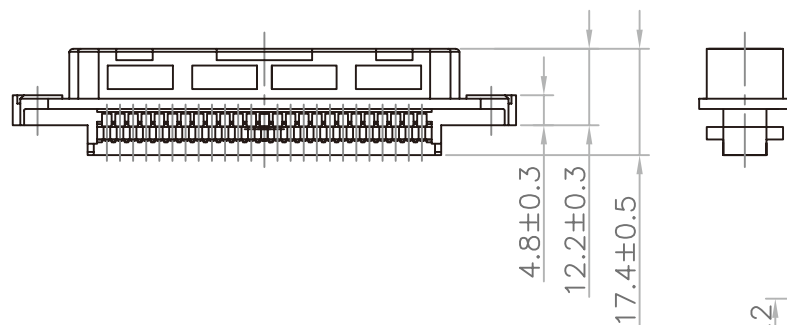
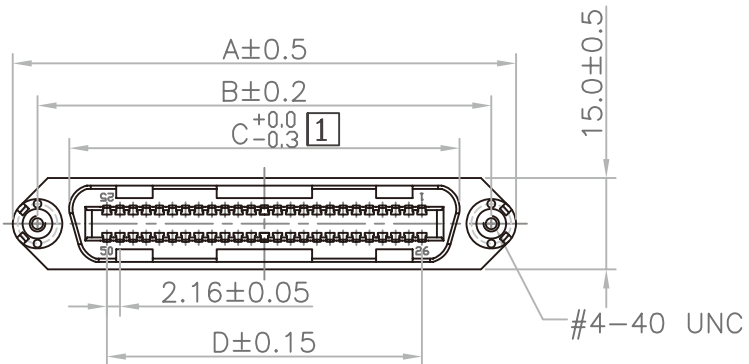
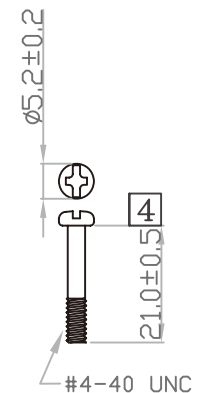



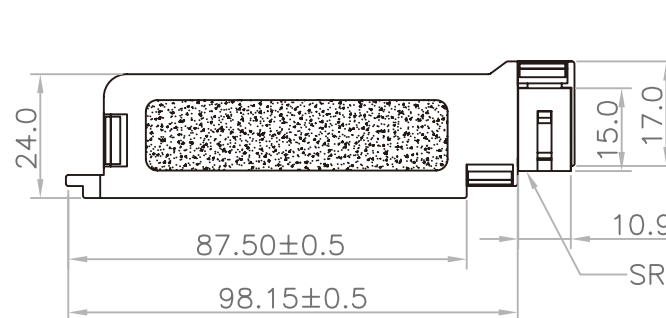

Contacts	A	B	C	D
14	44.15	35.95	25.38	12.96
24	54.95	46.75	36.18	23.76
36	67.91	59.71	49.14	36.72
50	83.03	74.83	64.26	51.84
64	98.15	89.95	79.38	66.96

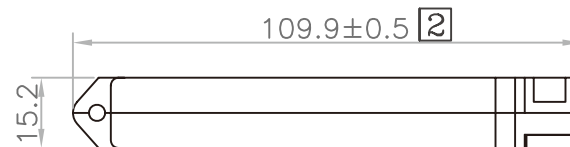

Features:

- *All connectors are available 24, 26, 28 AWG copper wire.
- *Dust cover to protect.
- *90° and 180° snap on strain relief cover.
- *Interconnection system for cable to cable application.

General Specifications:

- *Dielectric: Glass filled polyester Recognized UL 94V-0
- *Contact: Phosphor Bronze
- *Plating: Gold Plate over Nickel

Performance Characteristics:

- *Current Rating: 1A DC/max. per contact pair 1A/max. for simultaneous current on all contacts.
- *Contact Resistance: 25mΩ/Max.
- *Cable A'ssy contact resistance: 70mΩ/Max.
- *Dielectric with standing voltage: AC 1000V
- *Insulation Resistance: 10000MΩ/Min.
- *Temperature Range: -55℃ to +125℃

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

CTL-SK-xx-LF
SERIES T LEADFREE
14-64 WAY
BLACK
FEMALE

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG ±