
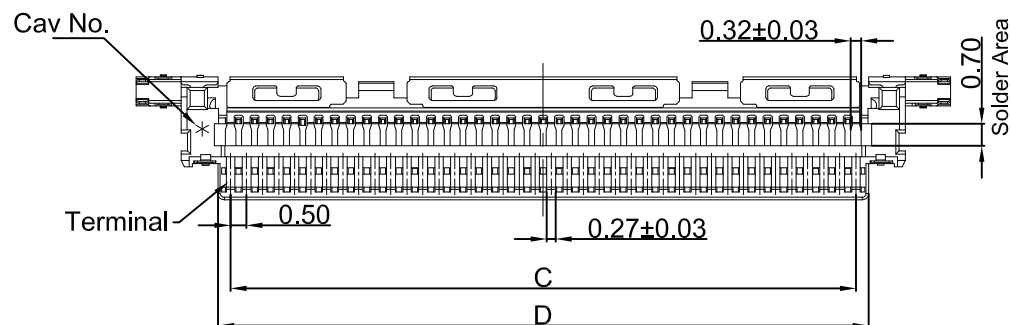

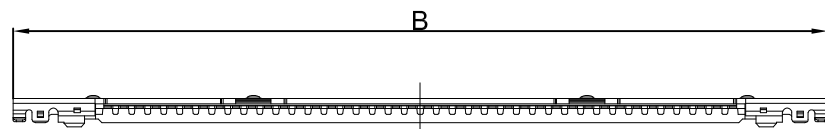


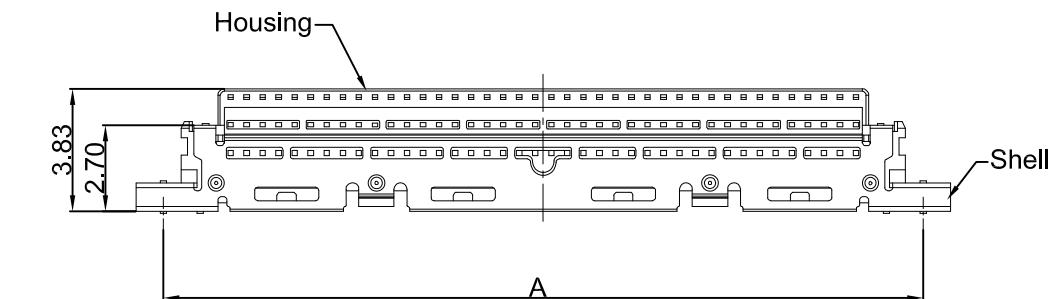

■SPEC.:

- Rated Voltage:100V AC,DC
- Rated Current:1A AC,DC
- Withstand Voltage:250V AC/minute
- Contact Resistance:50mΩ max
- Insulation Resistance:1000MΩ min
- Temperature Range:-40℃~+85℃

■Material:

- Insulator:LCP UL94V-0,Black
- Contact Pin: Phosphor Bronze
Finish:Gold-plated,over Nickel
- Shell:Phosphor Bronze
Finish:Gold-plated,over Nickel

Poles	A	B	C	D
30	18.84	21.00	14.50	15.30
40	23.70	25.40	19.50	20.30
50	28.70	30.40	24.50	25.30

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±



PPOJECTION

照片框

ORDER INFORMATION

CVS-HL-xx-LF
SERIES | LEADFREE
30.40.50WAY
PULL BAR
HOUSING

DESCRIPTION: PH0.5mm XXP Wire To Board With Pull Bar

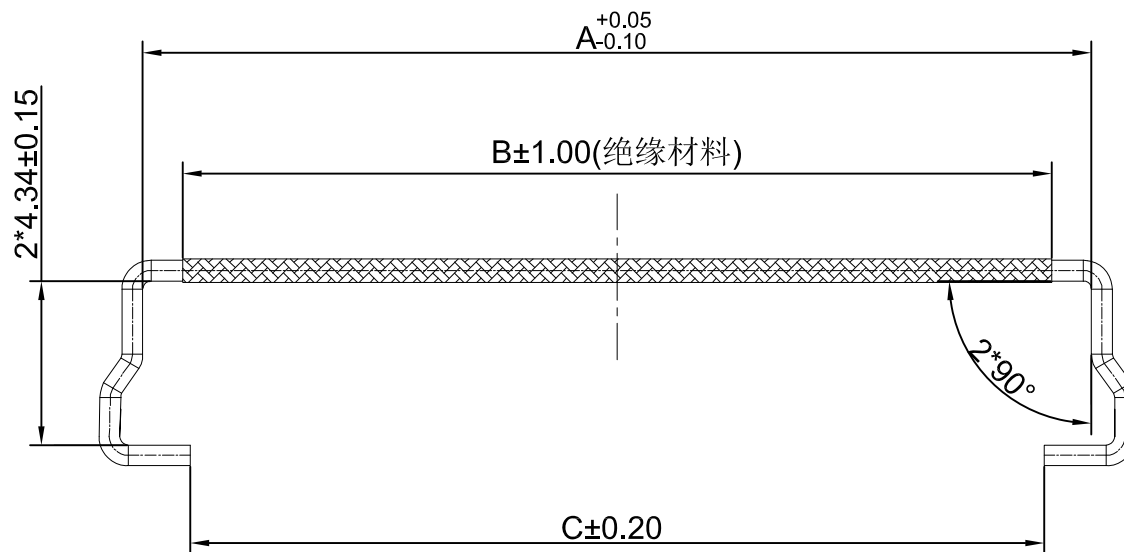

- Material:
- Lock Bar:Stainless Steel

Poles	A	B	C
30	20.10	18.00	17.58
40	25.10	23.00	22.58
50	30.10	28.00	27.58

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

CVS-HL-xx-LF
SERIES T LEADFREE
30.40.50WAY
PULL BAR
HOUSING

DESCRIPTION: PH0.5mm XXP Wire To Board With Pull Bar