
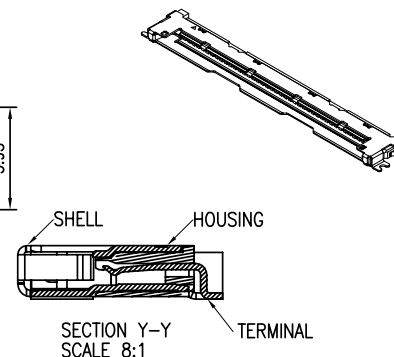


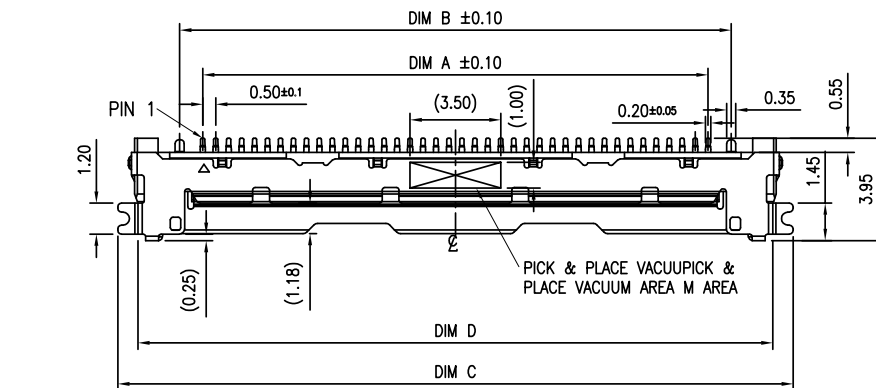

NOTES:







1. MATERIAL:

- 1.1 HOUSING: THERMOPLASTIC, HIGH TEMP., UL94V-0; COLOR: BLACK.
- 1.2 CONTACT: COPPER ALLOY
- 1.3 SHELL: COPPER ALLOY

2. FINISH:

- 2.1 CONTACT: SEE PART NUMBER PLATING
- 2.2 SHELL:
50 μ M NICKEL UNDERPLATING OVERALL.
1 μ M NICKEL FLASH ON SOLDER

- 3. REFLOW SOLDER CAPABLE TO 260°C PER ACES SPEC.

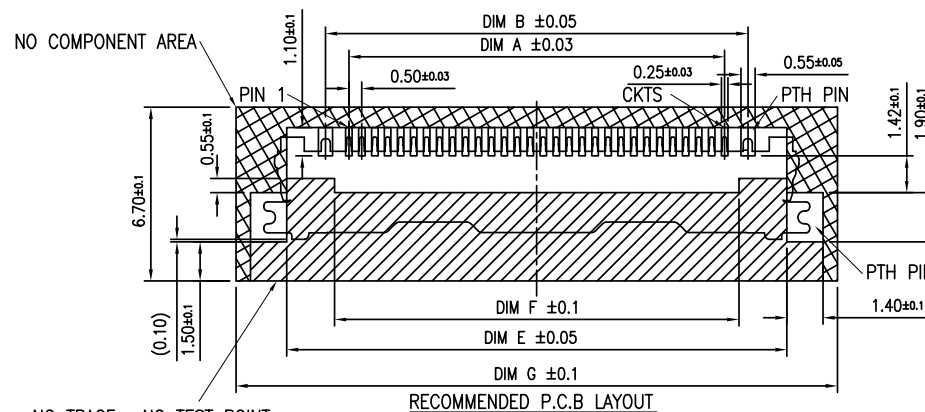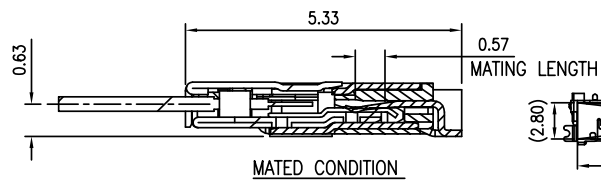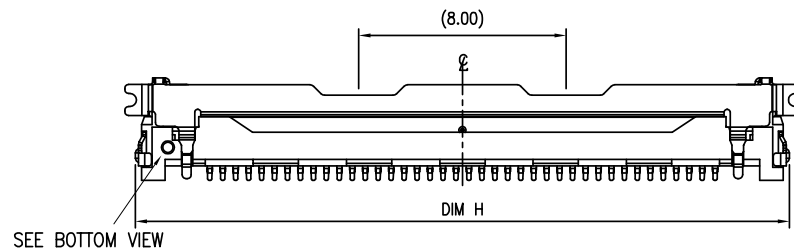

PART/No.	CKT.	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	DIM H	Available
CVS-W-20	20PIN	9.50	11.30	16.06	14.50	14.30	10.60	18.20	15.24	YES
CVS-W-30	30PIN	14.50	16.30	21.06	19.50	19.30	15.60	23.20	20.24	YES
CVS-W-40	40PIN	19.50	21.30	26.06	24.50	24.30	20.60	28.20	25.24	YES

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.50

CHECKED BY GENIUS

.X ± 0.25

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ± 0.10

ANG $\pm 2^\circ$

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

CVS-W-xx-LF
SERIES T LEADFREE
20.30.40WAY
90°SMT

DESCRIPTION: 0.5mm PITCH H=1.00mm LVDS CONNECTOR

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com