

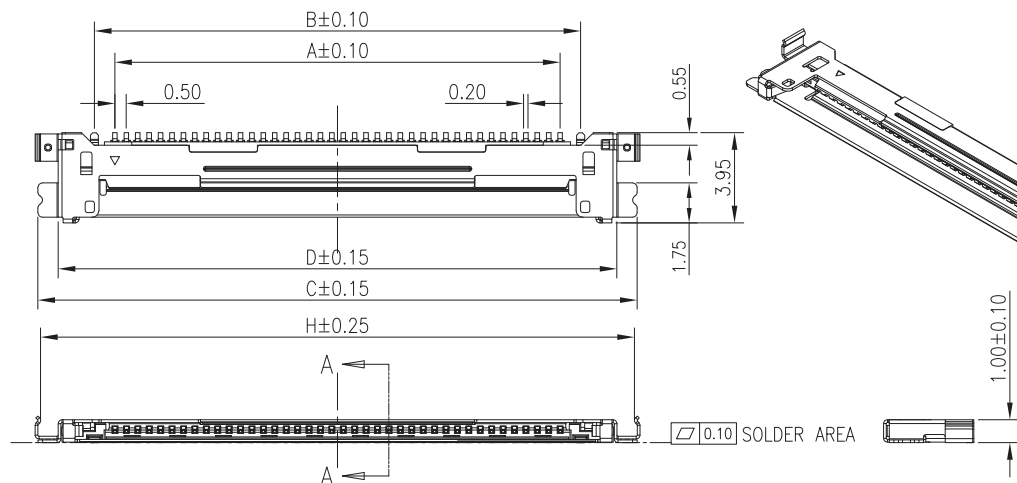


MATING CONDITION

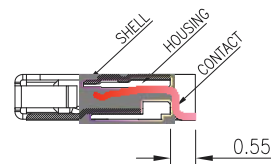

SEC : A--A (2:1)

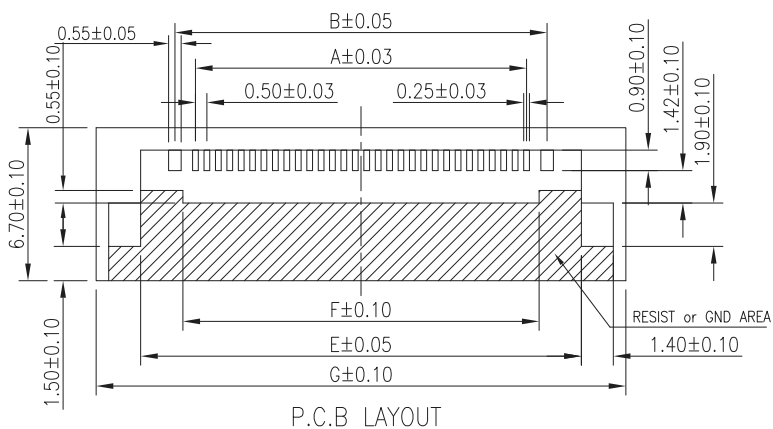

NOTES:

1. MATERIAL: LCP. UL94V-0, COLOR BLACK

SHELL: COPPER ALLOY

CONTACT : COPPER ALLOY

2. CONTACT FINISH: 1= GOLD 1u" MIN PLATING ON CONTACT AREA, GOLD 0.8u" MIN ON OTHER AREA, BOTH OVER NICKEL, 2= GOLD 5u" MIN PLATING ON CONTACT AREA, GOLD 0.8u" MIN ON OTHER AREA, BOTH OVER NICKEL,

3. SHELL FINISH : 1= GOLD 0.8u" OVER NICKEL, M=80u" TIN ,OVER 50u" NICKEL(LEADFREE MATTE)

4. PACKING TYPE: 1=TUBE 2= REEL

PART NO.	POS_(n)	A	B	C	D	E	F	G	H
CVS-WR-30	30	14.50	16.30	21.25	19.47	19.30	15.60	23.20	21.00
CVS-WR-40	40	19.50	21.30	26.25	24.47	24.30	20.60	28.20	26.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.35

.X ± 0.25

.XX ± 0.15

.XXX ± 0.05

ANG ± 3°




PPOJECTION



ORDER INFORMATION

CVS-WR-xx-LF
SERIES T T LEADFREE
30.40 WAY
REEL
90°SMT

DESCRIPTION:

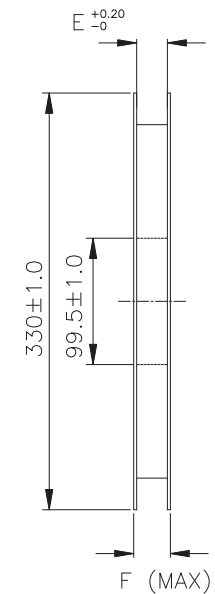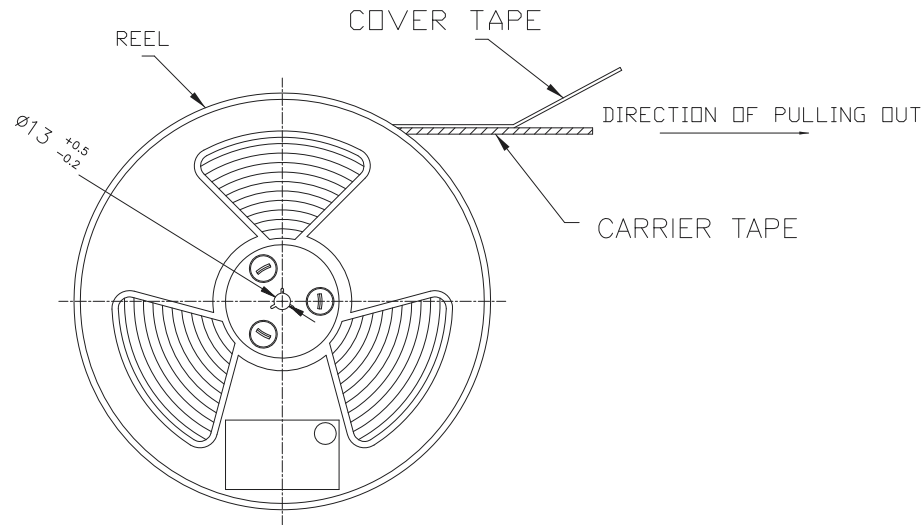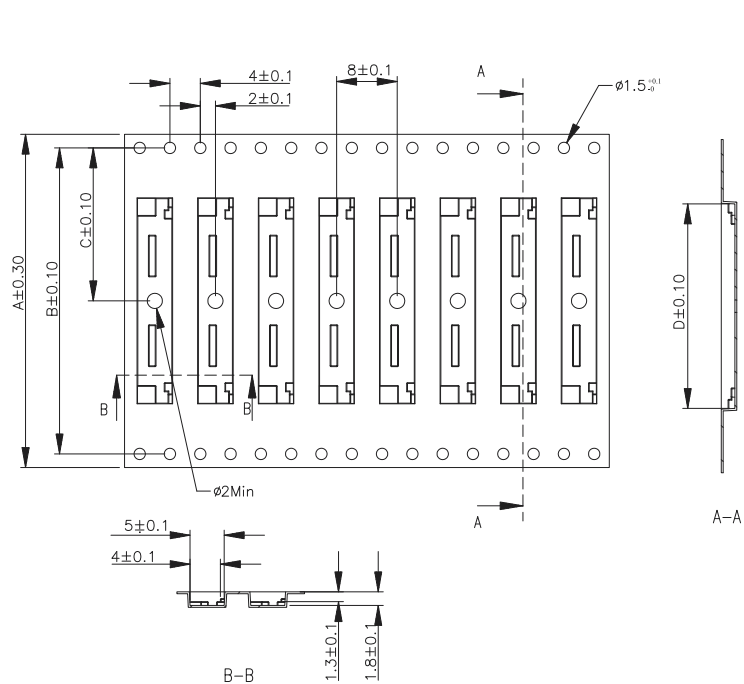

NOTE:

1. Material : Black Conductive Polystyrene Alloy.
2. All dimensions meet EIA-481-B requirements.
3. Thickness : 0.30 ± 0.05 mm.
4. 10 sprocket hole pitch cumulative tolerance ± 0.20
5. Carrier camber is within 1mm in 250mm
6. Packing length per 22" reel : 98.5 Meters.
7. Component load per 13" reel : 4000 pcs.

POS_(n) \ DIM	A	B	C	D	E	F
30P	32.00	28.40	14.20	22.05	32.40	38.40
40P	44.00	40.40	20.20	27.05	44.40	50.40

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.35

.X ± 0.25

.XX ± 0.15

.XXX ± 0.05

ANG $\pm 3^\circ$


PPOJECTION



ORDER INFORMATION

CVS-WR-xx-LF
SERIES T T LEADFREE
30.40 WAY
REEL
90°SMT

DESCRIPTION:

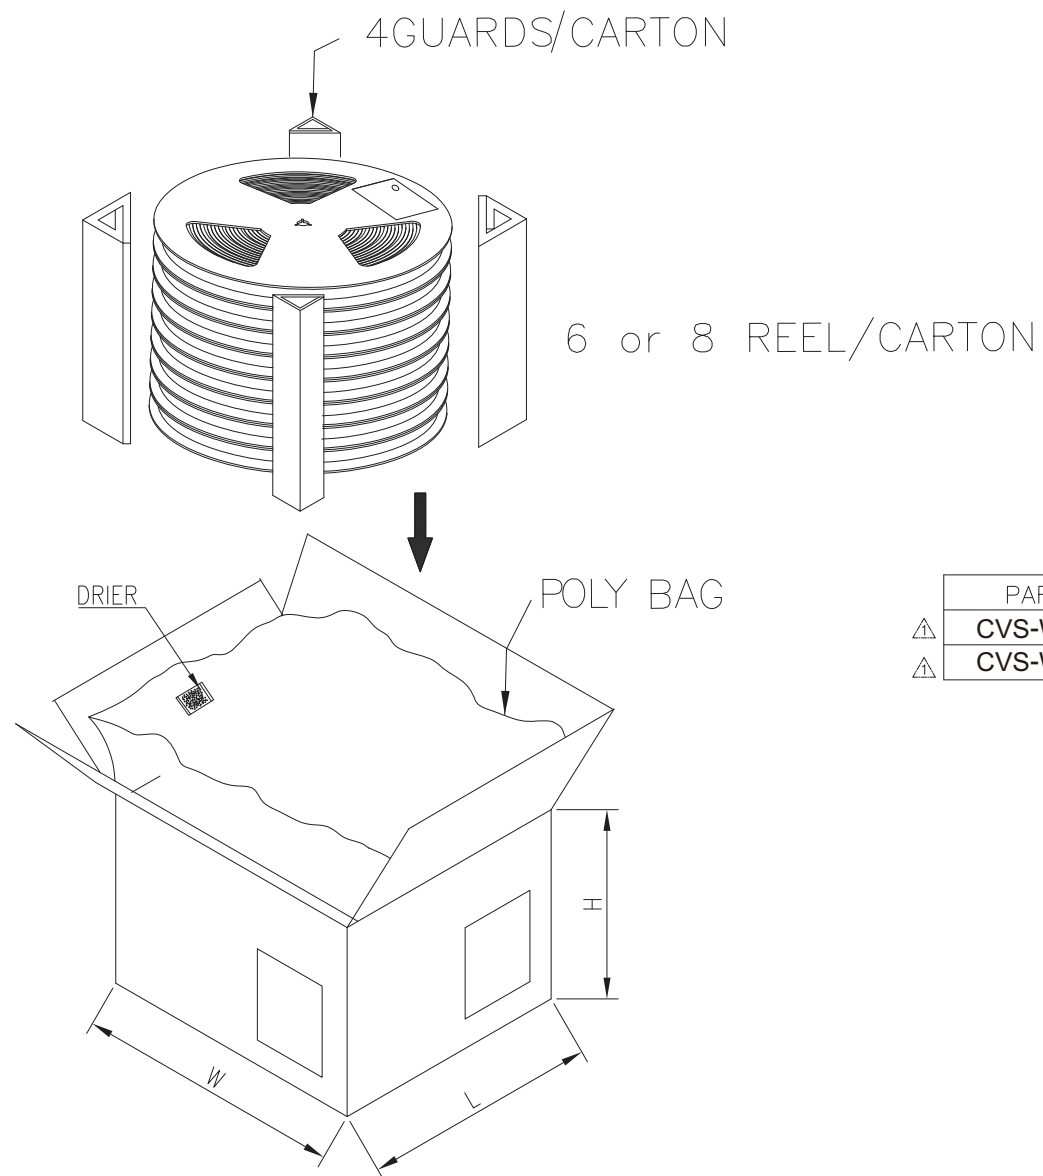

PACKING MATERIAL

PART NAME	30PIN DIM(mm)	40PIN DIM(mm)
REEL	330X 32	330X44
BIG CARTON	350X350X340	350X350X340

PACKING CAPACITY

PART NO.	PCS/RE	RE/BC	PCS/BC
△ CVS-WR-30	4,000PCS/RE	8 RE/BC	32,000 PCS/BC
△ CVS-WR-40	4,000PCS/RE	6 RE/BC	24,000 PCS/BC

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.35
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ± 3°

PPOJECTION



ORDER INFORMATION

CVS-WR-xx-LF
SERIES | T | LEADFREE
30.40 WAY
REEL
90°SMT

DESCRIPTION: