


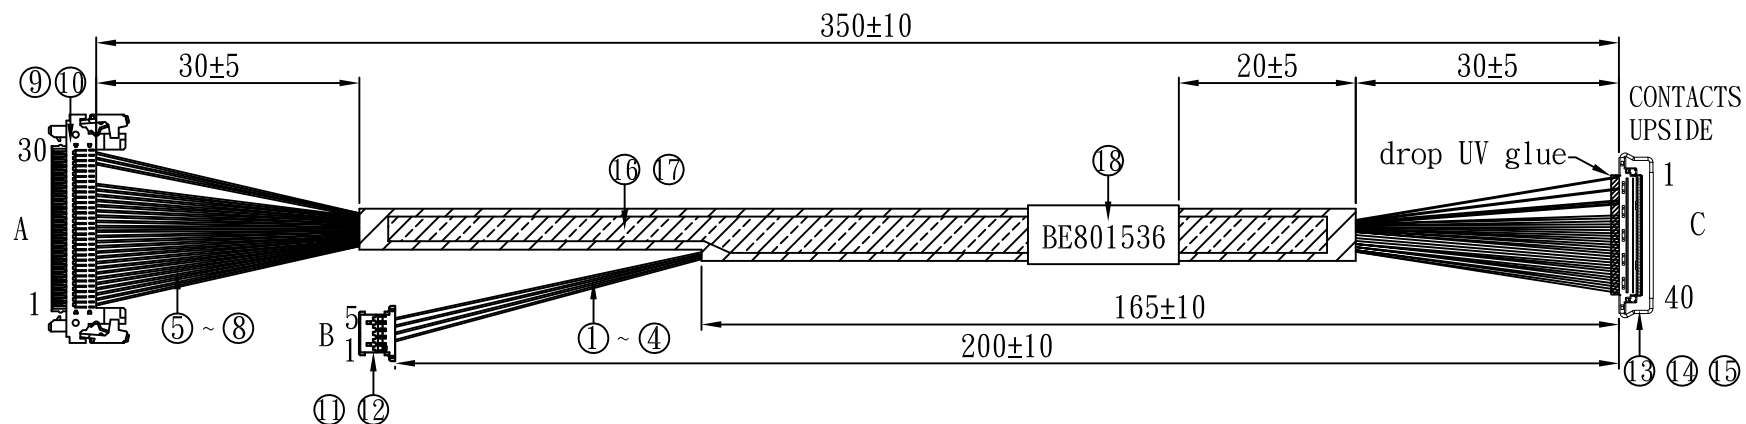

A	COLOR	C
24	BLACK	14
28	RED	15
29	RED	16
30	RED	17
1	WHITE	18
2	BLUE	19
3	WHITE	20
4	BLUE	21
5	WHITE	22
6	BLUE	23
7	BLACK	24
8	WHITE	25
9	BLUE	26
14	BLACK	27

TWIST
 TWIST
 TWIST
 TWIST
 TWIST

A	COLOR	C
10	WHITE	28
11	BLUE	29
12	WHITE	30
13	BLUE	31
15	WHITE	32
16	BLUE	33
17	BLACK	34
18	WHITE	35
19	BLUE	36
20	WHITE	37
21	BLUE	38
22	WHITE	39
23	BLUE	40

TWIST
 TWIST
 TWIST
 TWIST
 TWIST
 TWIST
 TWIST

B	COLOR	C
5	RED	1
4	BLACK	5
3	WHITE	9
2	BLUE	10

NO.	ITEM.	DESCRIPTION	Q'TY
1	WIRE:	UL10064 #32 RED	1PCS
2	WIRE:	UL10064 #32 BLACK	1PCS
3	WIRE:	UL10064 #32 WHITE	1PCS
4	WIRE:	UL10064 #32 BULE	1PCS
5	WIRE:	UL10064 #32 RED	3PCS
6	WIRE:	UL10064 #32 BLACK	4PCS
7	WIRE:	UL10064 #32 WHITE	10PCS
8	WIRE:	UL10064 #32 BULE	10PCS
9	HOUSING:	FIX-HL-30	1PCS
10	TERMINAL:	FIX-TG-30	27PCS
11	HOUSING:	PNM-H-05	1PCS
12	TERMINAL:	PNM-TG-28	4PCS
13	HOUSING:	LV03140-23201	1PCS
14	SHELL:	LV03140T11402	1PCS
15	PULL BAR:	LV03140B50003	1PCS
16	Conductive TAPE:	W:10	AR
17	Acetate TAPE:	W:10 BLACK	AR
18	LABEL:		1PCS

NOTES:

1. ALL DIMENSIONS ARE "mm".
2. THE PRODUCT MUST BE COMPLY WITH THE DIRECTIVE OF ROHS.

ELECTRICAL TESTING:

1. 100% OPEN/SHORT TEST
2. CONTACT RESISTANCE: 5mΩ
3. INSULATION RESISTANCE: 5MΩ Min

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

CVSFXPNM-40300532-M35CA-LF

SERIES

LEADFREE

20CM

350mm

MALE

32 AWG

40/30/05 WAY

DESCRIPTION: CABLE ASS"Y