


6	Contact Terminals	Brass	Nickel Ptd.	As table
5	Housing	ABS		1
4	Shield Cover B	Steel	Nickel Ptd.	1
3	Shield Cover A	Steel	Nickel Ptd.	1
2	Screw Cap	PA6		1
1	Shell Cover	PA6		1
No.	Description	Material	Treat	Q'ty

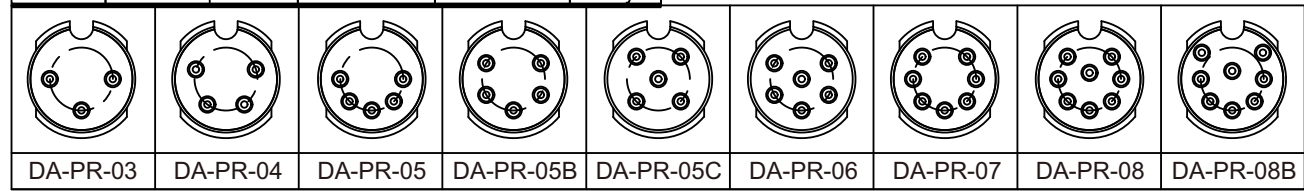


Specifications
 rating :
 100V AC 2A MAX
 contact resistance :
 pins-30mΩ MAX; shell-50mΩ MAX
 insulation resistance :
 MIN 100 MEGΩ @500V DC
 voltage withstand :
 250V AC R.M.S. for 1 minute

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION



MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司
 www.morethanall.com

DRAWING BY CY		X. ±
CHECKED BY GENIUS		.X ± 0.30
UNIT / mm	SCALE 1 : 1	.XX ± 0.20
DATE		.XXX ±
SIZE A4	PJECTION	ANG ±

DESCRIPTION: