


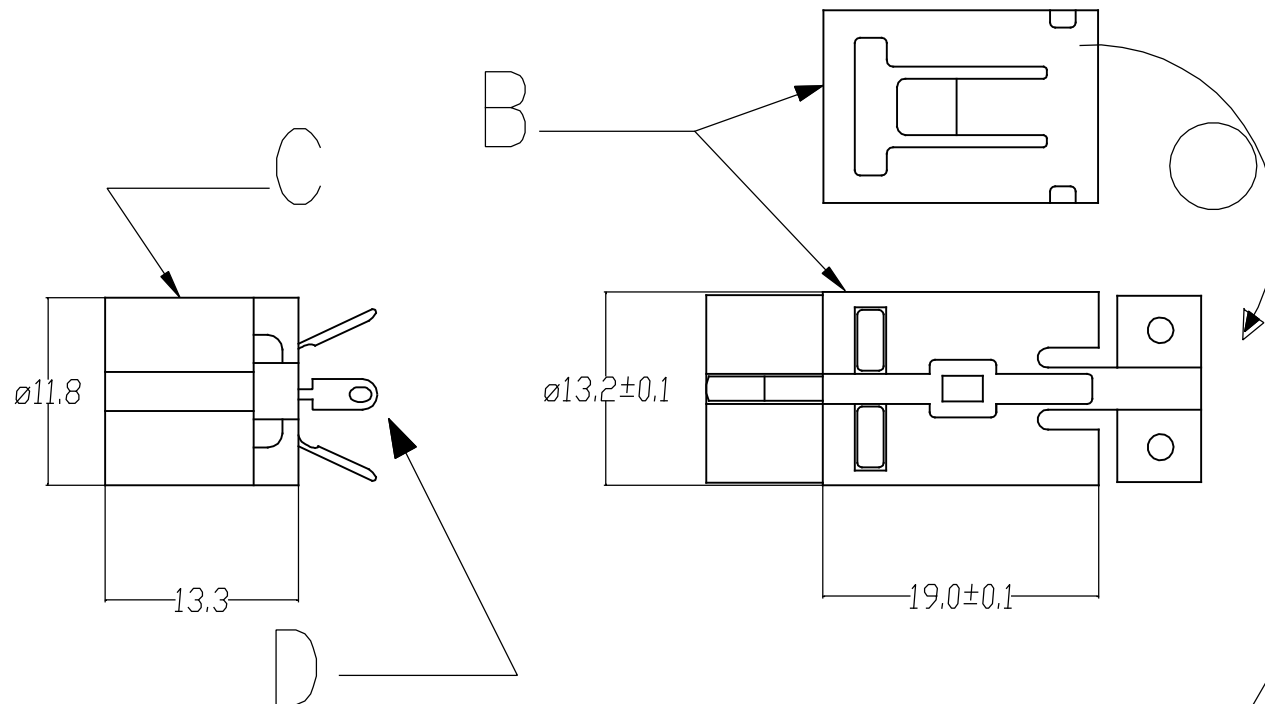

ROHS COMPLIANT SPECIFICATIONS:


- 1.RATING:100V AC AT 1A
- 2.INSULATION RESISTANCE:
OVER 100M OHM AT 500V DC
- 3.DIELECTRIC STRENGTH:
250V AC FOR ONE MINUTE

材質:

- A:後套. EVA
B:鐵殼. 馬口鐵鍍鎳
C:膠芯. 電木
D:針 . 黃銅鍍銀

MATERIALS

- A.BOOT: EVA
B.METAL PART:STEEL NICKEL PLATED
C.INSULATOR:PC
D.PIN CONTACT:BRASS SILVER PLATED

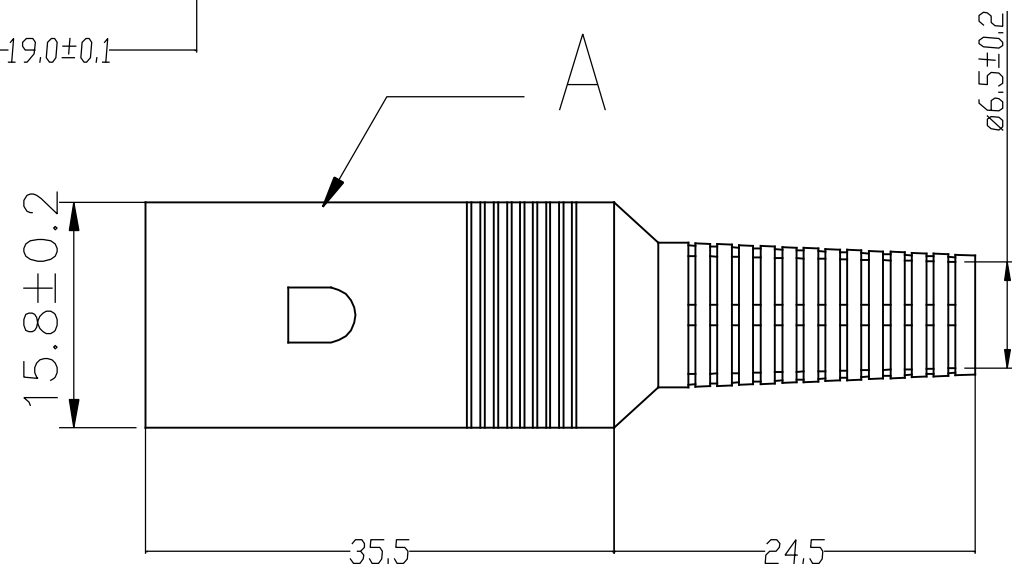

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X. ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

ORDER INFORMATION


DA-S-xx-LF
SERIES | T LEADFREE
03~08WAY
FEMALE

DESCRIPTION:


CUSTOMER DRAWING




DA-S-03




DA-S-04




DA-S-05B




DA-S-06



DA-S-07



DA-S-08

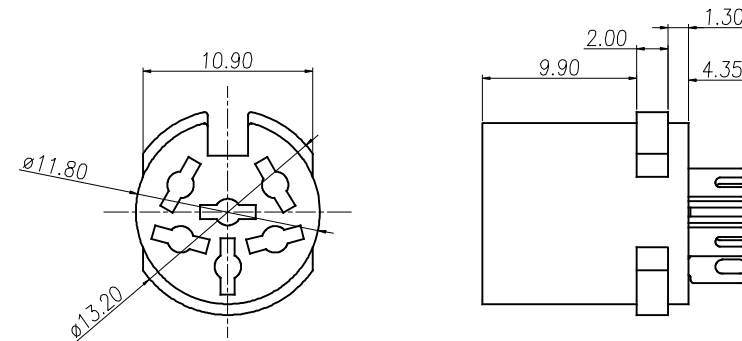

1. MATERIAL :
 - 1-1. HOUSING : ABS ; COLOR : BLACK
 - 1-2. CONTACT : BRASS
2. FINISH :
 - 2-1. CONTACT : TIN PLATING

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

DA-S-xx-LF
SERIES | LEADFREE
03~08WAY
FEMALE

DESCRIPTION: