


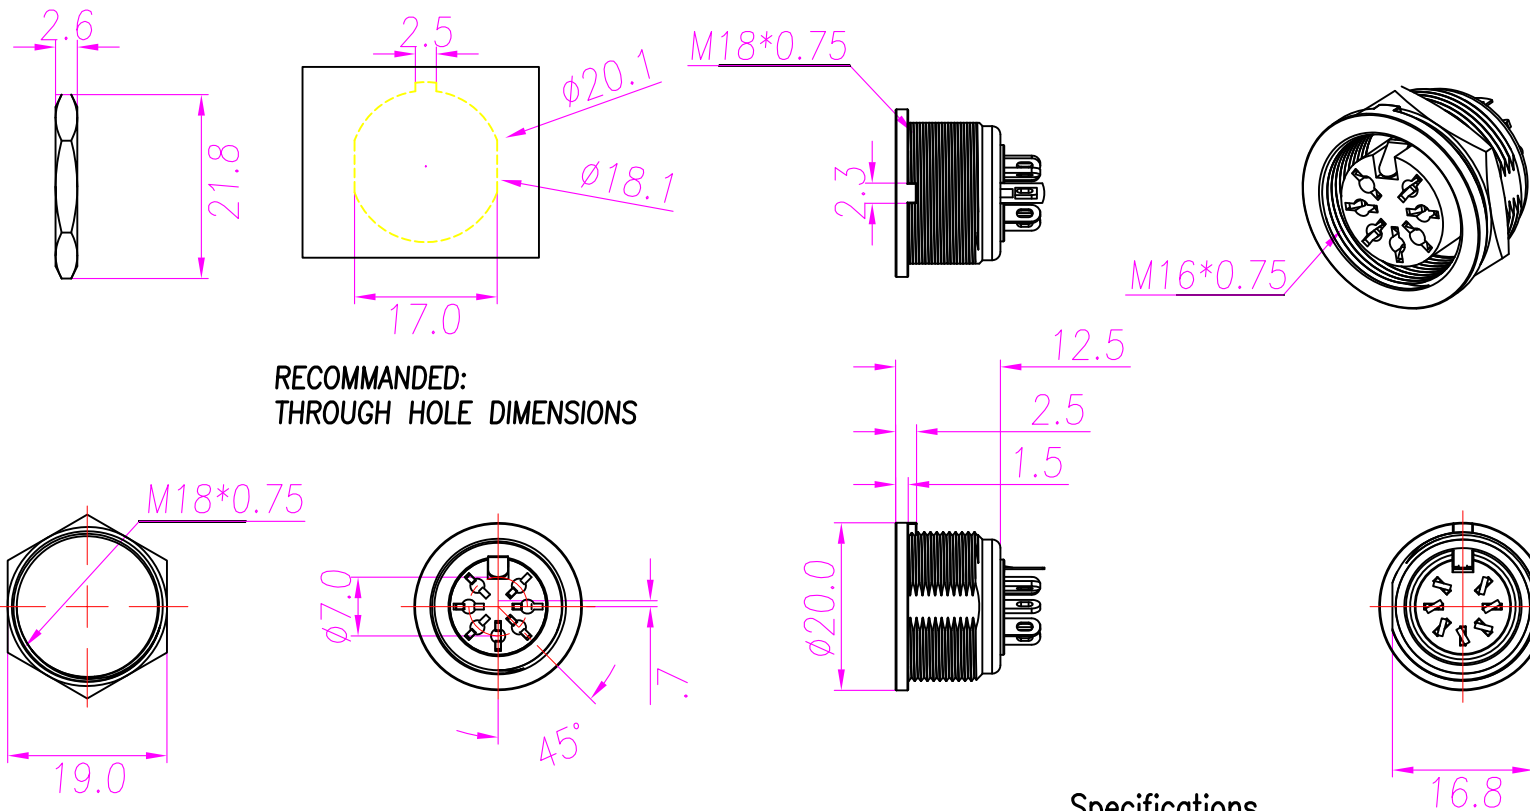

RECOMMENDED:
THROUGH HOLE DIMENSIONS

Specifications

rating :

100V AC 4A MAX

contact resistance :

pins-30mΩ MAX; shell-50mΩ MAX

insulation resistance :

MIN 100 MEGΩ @500V DC

voltage withstand :

250V AC R.M.S. for 1 minute

5	Terminals	Brass	Silver Ptd.	7
4	Housing	PA		1
3	Negative Contact	Copper	Nickel Ptd.	1
2	Screw Nut	Brass	Nickel Ptd.	1
1	Shield Cover	Zn Alloy	Nickel Ptd.	1
No.	Description	Material	Treat	Q'ty

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ± 0.05
ANG ± 1°

照片框

ORDER INFORMATION

DAMS-JS-07-LF

SERIES T LEADFREE
07 WAY
SOLDER
JACK

DESCRIPTION: 7P SCREW LOCKING DIN SOCKET PANEL MOUNT