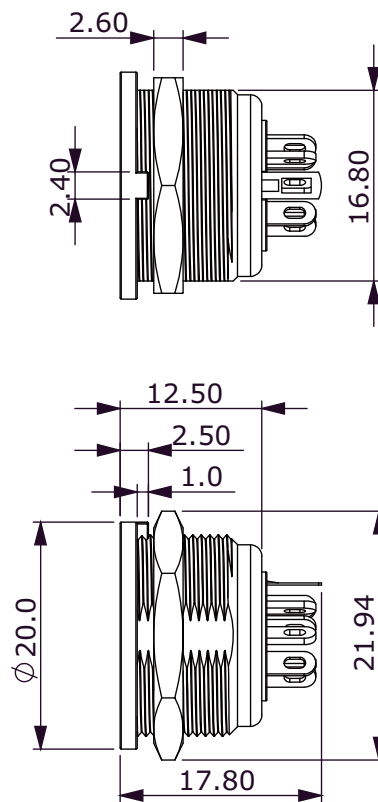
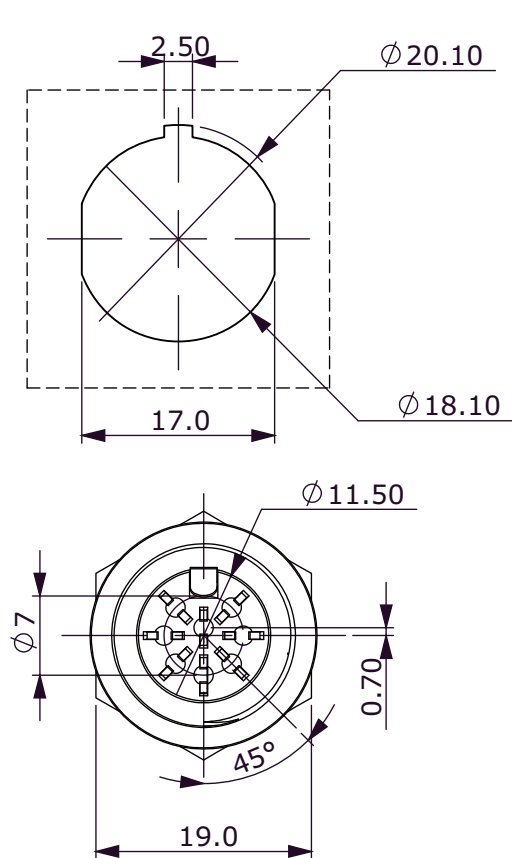


Specifications

rating :
 100V AC 4A MAX
 contact resistance :
 pins-30m Ω MAX; shell-50m Ω MAX
 insulation resistance :
 MIN 100 MEG Ω @500V DC
 voltage withstand :
 250V AC R.M.S. for 1 minute

5	TERMINALS	Brass	Silver Ptd.	8
4	8P 270 HOUSING	PA66		1
3	SCREW NUT	Brass	Nickel Ptd.	1
2	NEGATIVE CONTACT	Copper	Nickel Ptd.	1
1	COVER	Zn Alloy	Nickel Ptd.	1
No.	Description	Material	Treat	Q'ty

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
 .X $\pm$
 .XX $\pm$
 .XXX $\pm$
 ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DAMS-JS-08-LF

SERIES | LEADFREE
 08 WAY
 SOLDER
 JACK

DESCRIPTION: DIN 8P270 SCREW LOCKING SOCKET PANEL MOUNT