

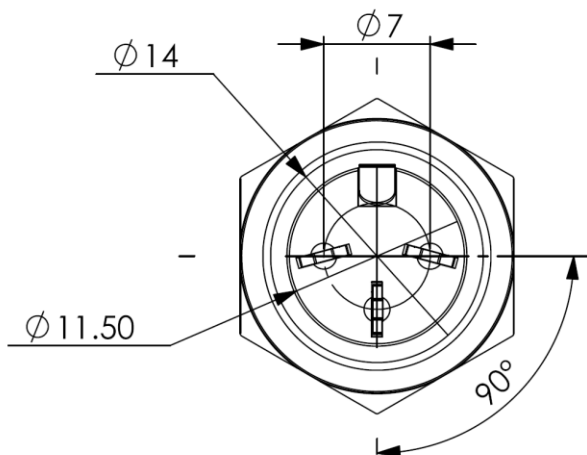


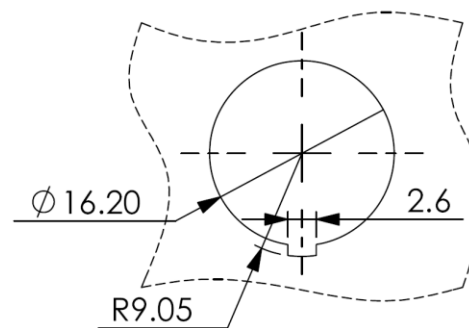


Specifications
rating :

100V AC 4A MAX
contact resistance :
pins-30mΩ MAX; shell-50mΩ MAX
insulation resistance :
MIN 100 MEGΩ @500V DC
voltage withstand :
250V AC R.M.S. for 1 minute

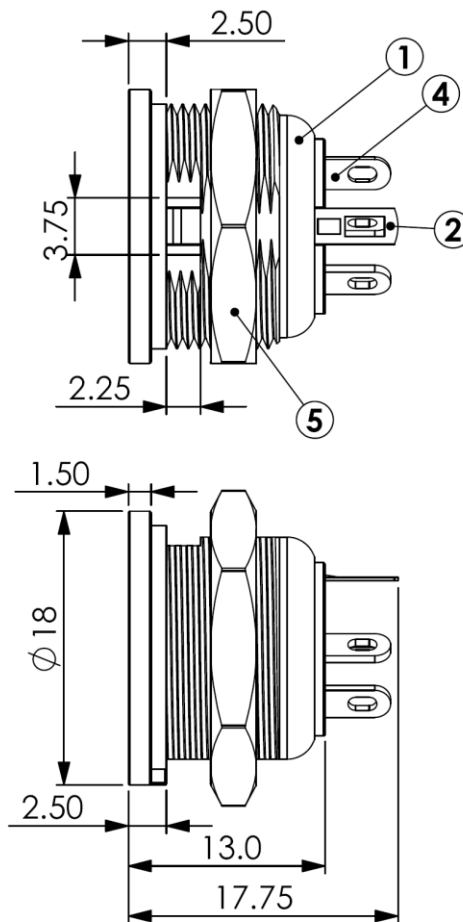

Through Hole Dimension

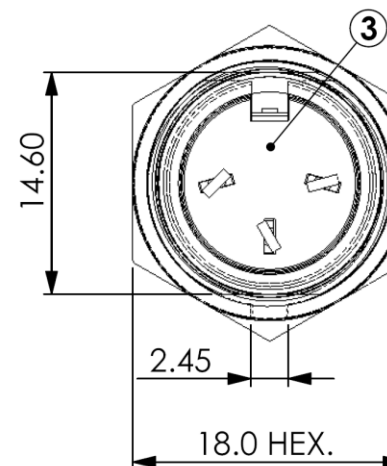

No.	Description	Material	Treat	Q'ty
1	Shield Cover	Zn Alloy	Nickel Ptd.	1
2	Negative Contact	Copper	Nickel Ptd.	1
3	3P HOUSING	PA66		1
4	Terminals	Brass	Silver Ptd.	3
5	SCREW NUT	Brass	Nickel Ptd.	1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DAMS-JSX-03-LF

SERIES T LEADFREE
03 WAY
NO INNER THREAD
SOLDER
JACK

DESCRIPTION: 3P DIN SOCKET PANEL SCREW MOUNT