
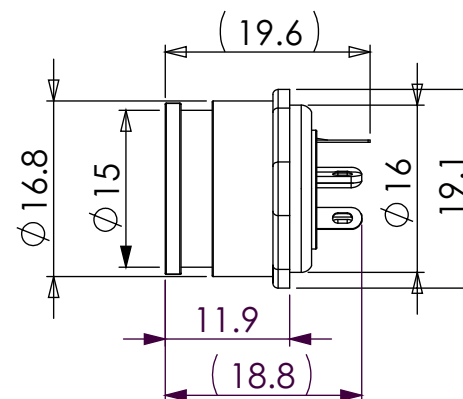
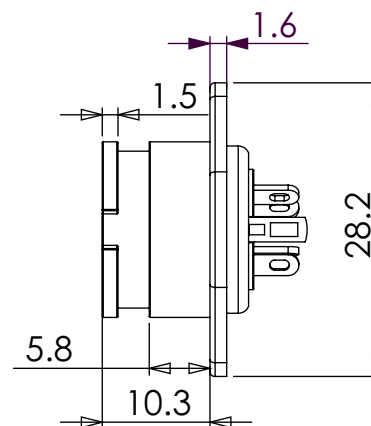
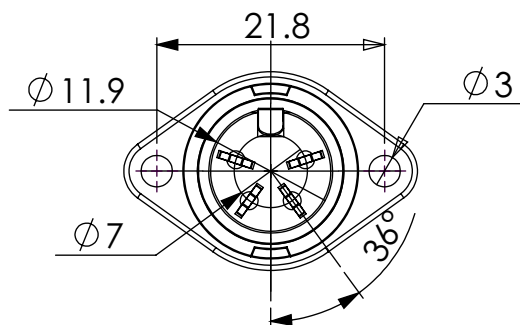




4	4P Housing	PA66		1
3	Terminals	Brass	Silver Ptd.	4
2	Nagetive Contactor	Copper	Nickel Ptd.	1
1	Shield Cover	Zn Alloy	Nickel Ptd.	1
No.	Description	Material	Treat	Q'ty

Specifications

rating :
 100V AC 4A MAX
 contact resistance :
 pins-30mΩ MAX; shell-50mΩ MAX
 insulation resistance :
 MIN 100 MEGΩ @500V DC
 voltage withstand :
 250V AC R.M.S. for 1 minute

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
 .X ± 0.25
 .XX ± 0.10
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

DASM-JS-04-LF

SERIES

LEADFREE

04 WAY

SOLDER

FEMALE

DESCRIPTION: