
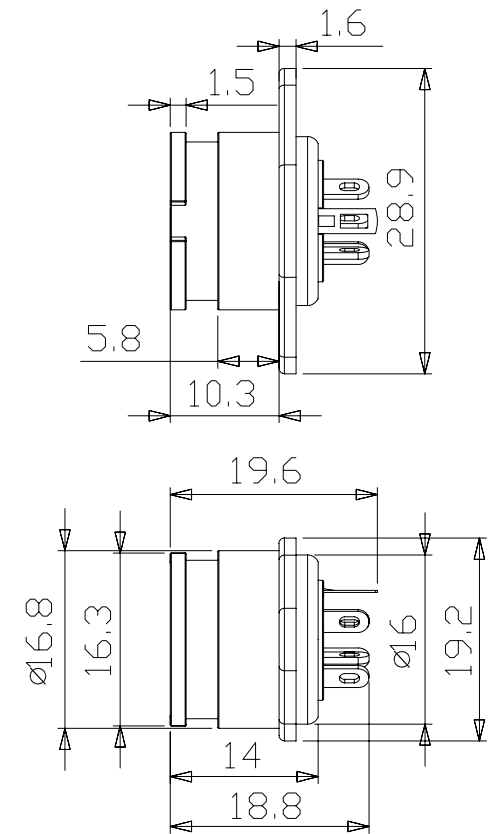


Specifications
Rating:100V AC 4A MAX
Contact resistance:
pins-30m ohm MAX;shell-50m ohm MAX
Insulation resistance:
MIN 100 MEG OHM @500V DC
Voltage withstand:
250V AC R.M.S for 1 minute

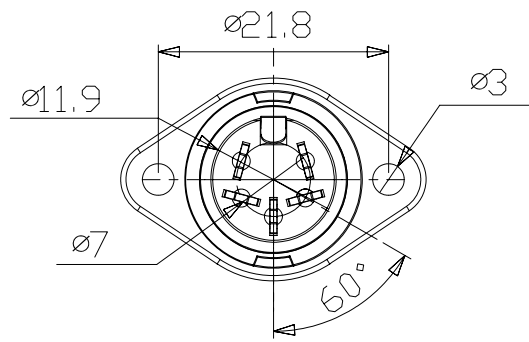

4	Nagetive Contactor	Copper	Nickel Ptd.	1
3	Termincls	Brass	Silver Ptd.	5
2	Housing	ABS		1
1	Shield Cover	Zn Alloy	Nickel Ptd.	1
No.	Description	Material	Treat	Q'ty

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

DASM-JS-05B-LF
SERIES | LEADFREE
| 05 WAY B TYPE
SOLDER
FEMALE

DESCRIPTION:



Morethanall
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY		X. ± .X ± .XX ± .XXX ± ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PPOJECTION 	