


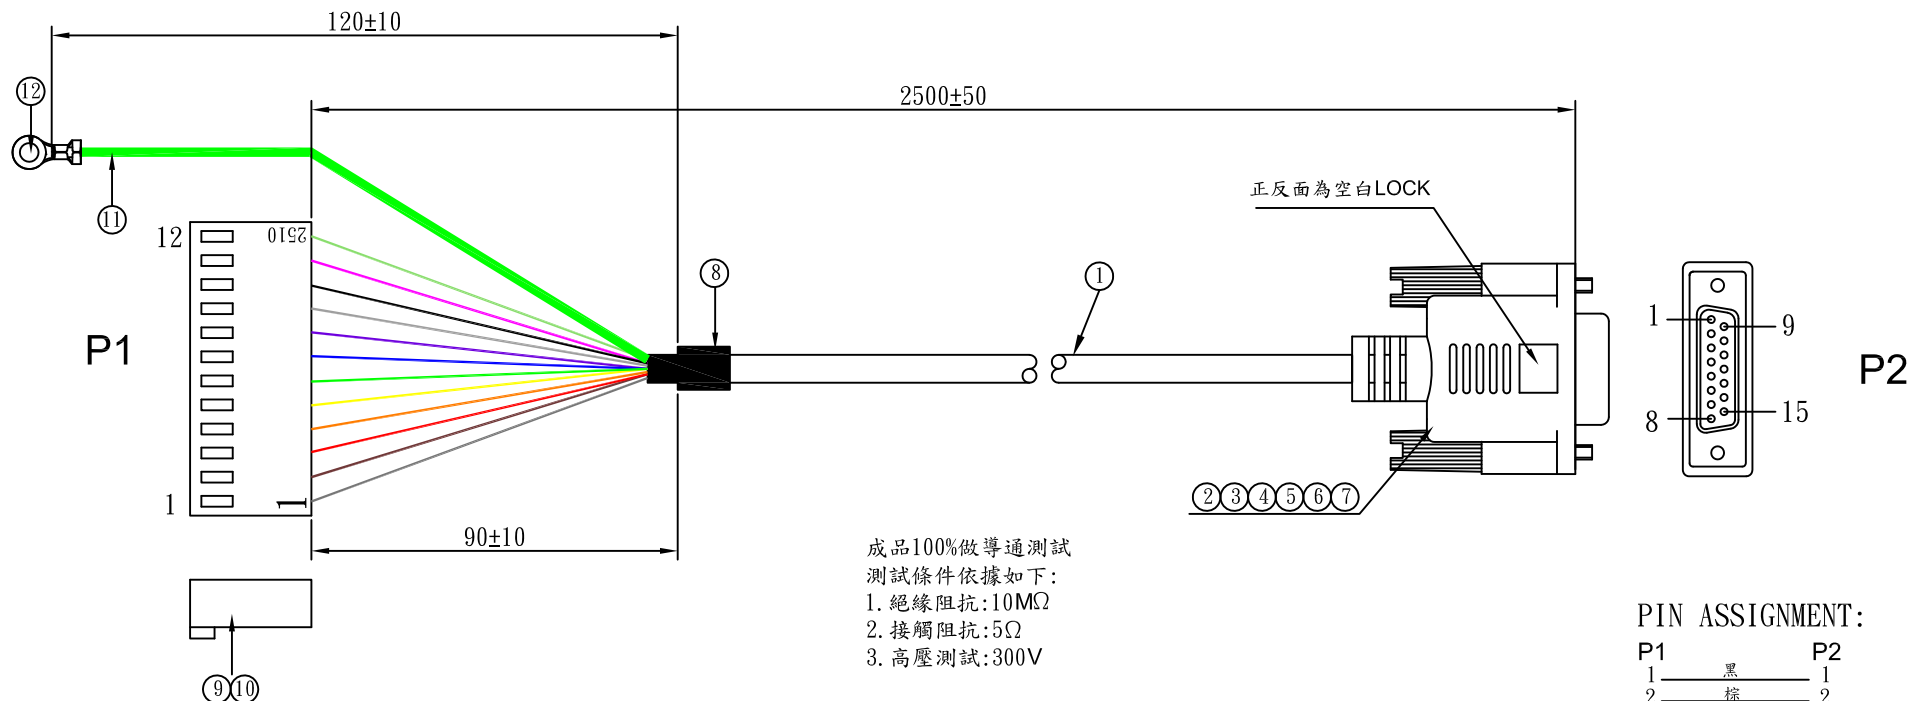

NOTES: UNLESS OTHERWISE SPECIFIED (注意:重點詳細說明)

序號	材料說明及用量	數量
1	ul 2464 24#12C+AB OD:7.0MM COLOR:BLACK	1PCS
2	DB 15P/F PBT:WHITE MOLDING TYPE BLACK	1PCS
3	MOLDING:45P PVC COLOR:BLACK	14G
4	PE內膜料 透明白	8G
5	成型螺絲:4#-40 L=42.2MM MOLDING TYPE BLACK	2PCS
6	H.S TUBE:Ø2.0*20MM THICK:0.2MM BLACK	1PCS
7	1007 24#WIRE 跳線 顏色自定	2PCS
8	H.S TUBE:Ø9.0*30MM THICK:0.2MM BLACK	1PCS
9	HOUSING:2510 1*12P 棕紅色 背面為短柱	12PCS
10	TER:2510 黃銅鍍錫端子	1PCS
11	1007 20#WIRE COLOR:GREEN	1PCS
12	圓盤鍍錫端子:Ø3.2*7.5MM t=0.5MM	

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DBMKRT-15123224R1AB-F2M5-LF

SERIES

15 TO 12 WAY

Ø3.2 TERMINAL

24 AWG

LEADFREE

2500mm

FEMALE TO FEMALE

BRAID

AL.(ALUMINUM FOIL)

ROUND CABLE

DESCRIPTION: