



Schemat ideowy kabla RS "L" THERMAL FP1

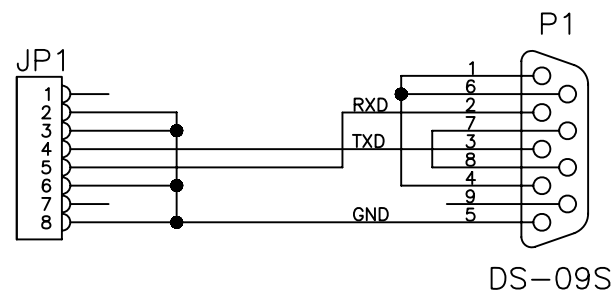

Kabel telefoniczny KP8 dł. 270 cm

Nalepka " L "

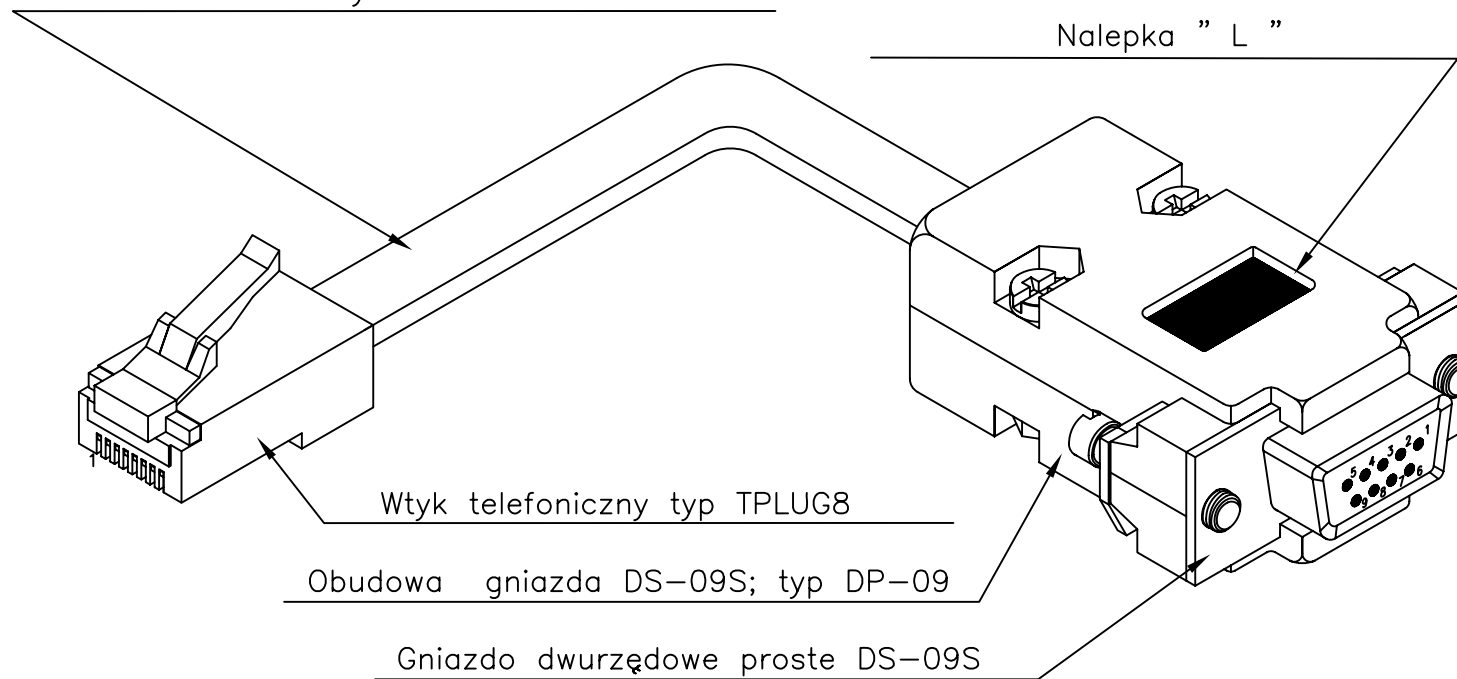

Wtyk telefoniczny typ TPLUG8

Obudowa gniazda DS-09S; typ DP-09

Gniazdo dwurzędowe proste DS-09S

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DBRJ-0908-A2M7-LF

SERIES

LEADFREE

2700mm

FEMALE TO MALE

9 PIN TO 8P8C

DESCRIPTION: