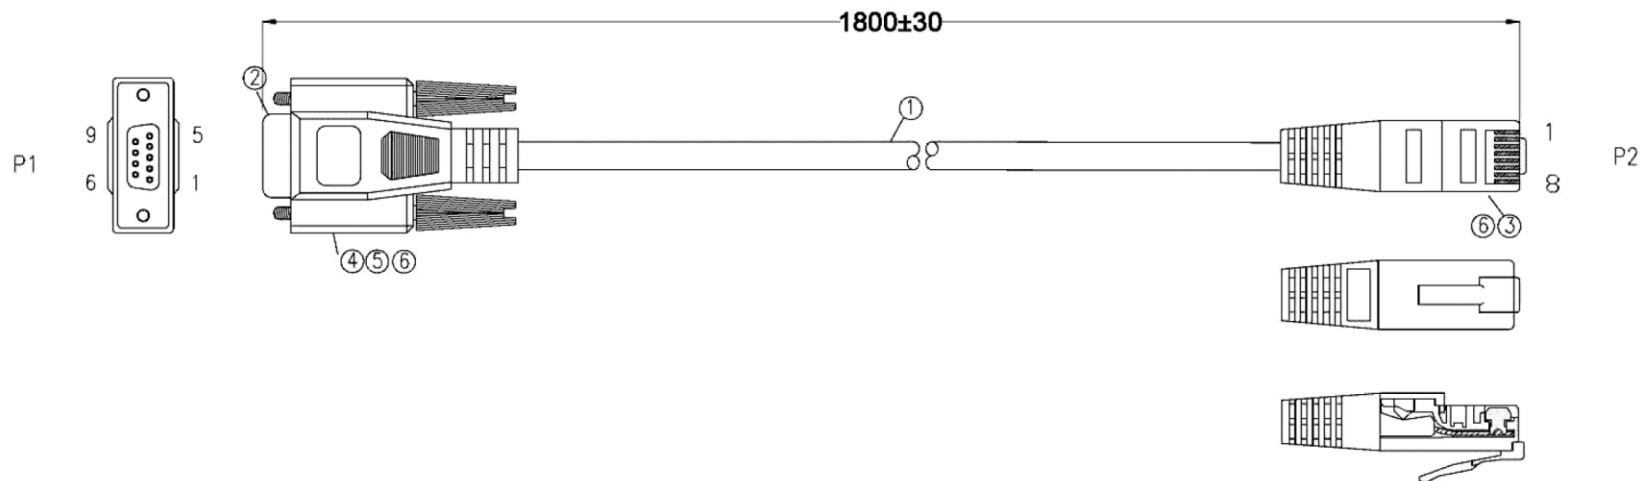


PIN ASSIGNMENT:

P1		P2
7	黑	8
4	棕	7
3	红	6
5	橙	5
	黄	4
2	绿	3
6	兰	2
8	白	1

NOTES:

1. 100% OPEN & SHORT TEST
2. CONDUCTIVE RESISTANCE : 5 Ohms MAX
3. INSULATION RESISTANCE : 5M Ohms MIN
4. HI-POT : 300V DC/10ms
5. The product is ROHS compliant.

⑥	外模	PVC 45P 灰色GR06	1
⑤	内模	PE	1
④	螺丝棒	4*47 鍍镍	
③	CONNECTOR	水晶头8P8C/M PIN鍍金3U* PC透明.圆孔Φ1.0MM	1
②	CONNECTOR	DB9P 母头 壳鍍镍 PIN金G/F 黑胶芯 焊线式	2
①	CABLE	UL2464 28AWG (7/0.12BC*8C+AL)*1C.OD=5.0MM PVC外被灰色 芯线颜色: 黑.棕.红.橙.黄.绿.兰.白	1

NO. PARTS NAME SPECIFICATION STANDARD QTY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ± 0.05
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DBRJ-090828GE-A1M8-LF

SERIES

LEADFREE

1800mm

GRAY

28AWG

09 TO 08 WAY

FEMALE TO MALE

DESCRIPTION: