


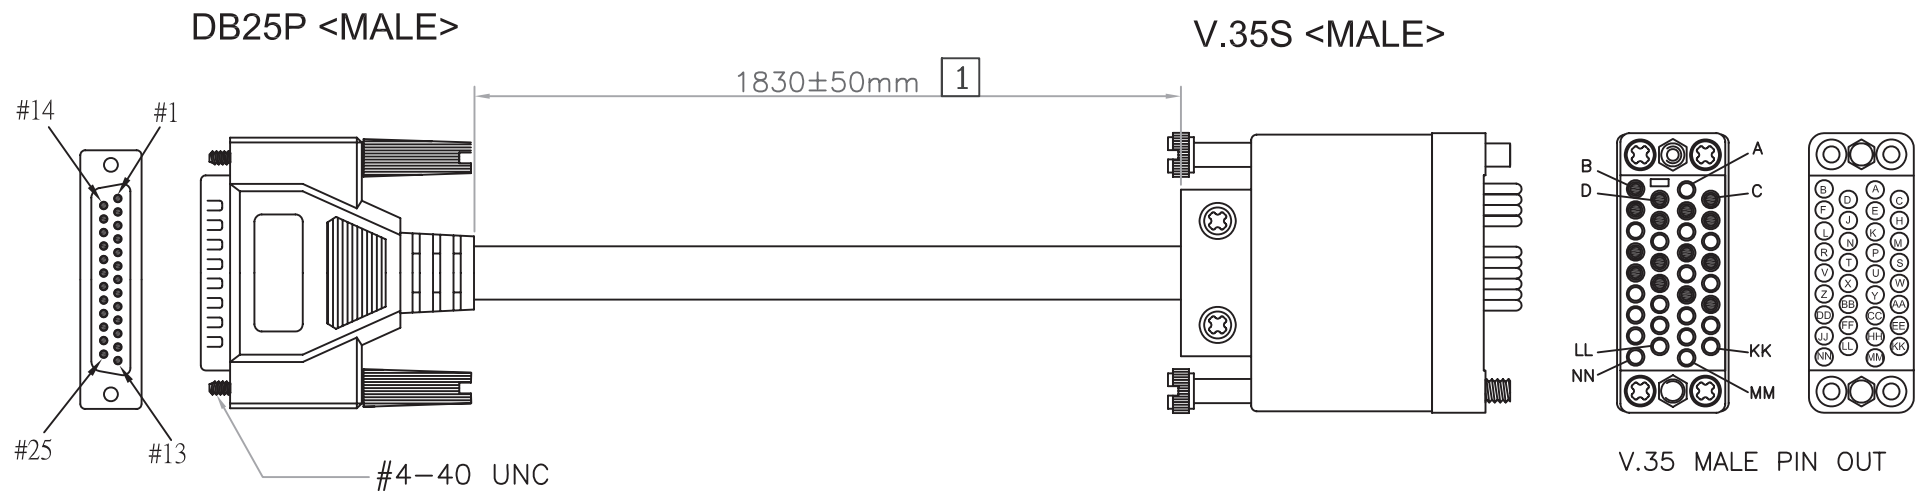

PIN ASSIGNMENT	
DB25P	V35S
4	C
5	D
6	E
7	B
8	F
9	S
10	P
11	T
12	R
19	Y
20	H
21	AA
22	J
23	V
25	X

4	CABLE UL2464, 24AWG, 20C+A+D, GRAY	1.84	M
3	D-SUB 25P MALE, MOLDING TYPE, BLACK	1	SET
2	V.35 CRIMP MALE TERMINAL	15	PCS
1	V.35 CRIMP MALE W/SR	1	SET
ITEM	DESCRIPTION	QTY	UNIT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.50

.X ± 0.40

.XX ± 0.30

.XXX ±

ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

DBV35-253424-M6F-LF

SERIES

LEADFREE

1830mm

MALE TO MALE

24 AWG

25 TO 34 WAY

DESCRIPTION: DB25P / V.35P CABLE - 1.8M