


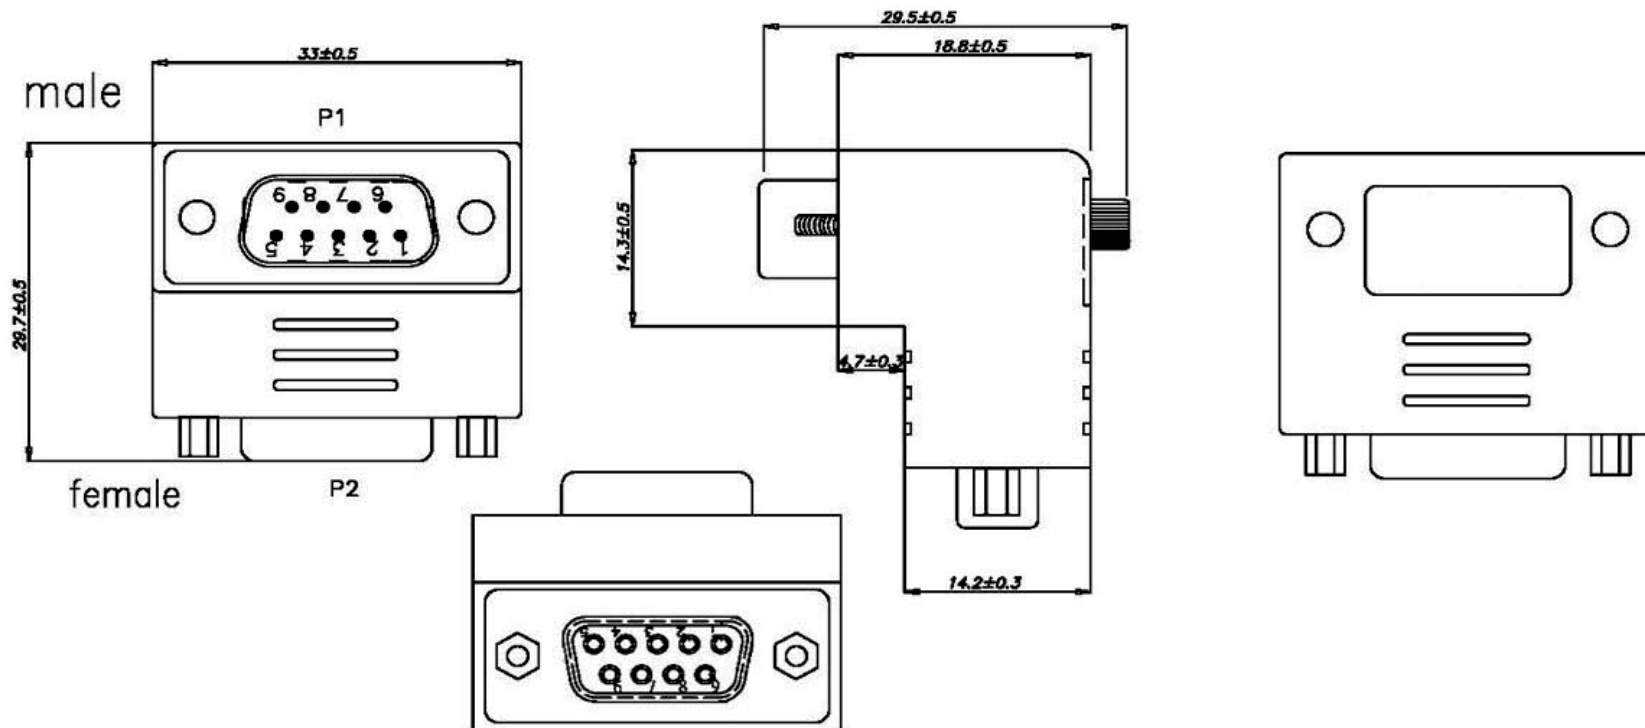

⑥	PVC	MOLDED 45P PVC BLACK	0.030KG
⑤	SCREW	SCREW #4-40UNC, #2.8*32mm GOLD PLATED	2PCS
④	CONN.	DB9 FEMALE CONNECTOR SOLDER TYPE CONTACT GOLD FLASH. GOLD PLATED SHELL, INSULATOR (RED, GREEN, BLUE SEPARATE ONE).	1PCS
③	CONN.	DB9 MALE CONNECTOR SOLDER TYPE CONTACT GOLD FLASH INSULATOR: BLUE FRONT GOLD PLATED BACK TIN PLATED WHITE SHELL.	1PCS
②	CABLE	HOOK UP WIRE: UL1007 28AWG*1C TINNED COPPER WIRE, INSULATION: RED PVC L=30±1mm.	5PCS
①	CABLE	HOOK UP WIRE: UL1007 28AWG*1C TINNED COPPER WIRE, INSULATION: BLACK PVC L=25±1	10PCS
ITEM	NAME	DESCRIPTION	Q'TY

P1	WIRE LIST:	P2
1	_____	1
2	_____	2
3	_____	3
4	_____	4
5	_____	5
6	_____	6
7	_____	7
8	_____	8
9	_____	9
SHELL	_____	SHELL

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DBX2-EML-0909-LF

SERIES LEADFREE

09 TO 09 WAY

90°

MOLDING

MALE TO FEMALE

DESCRIPTION: