


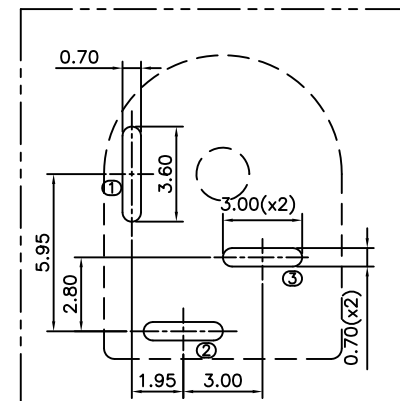
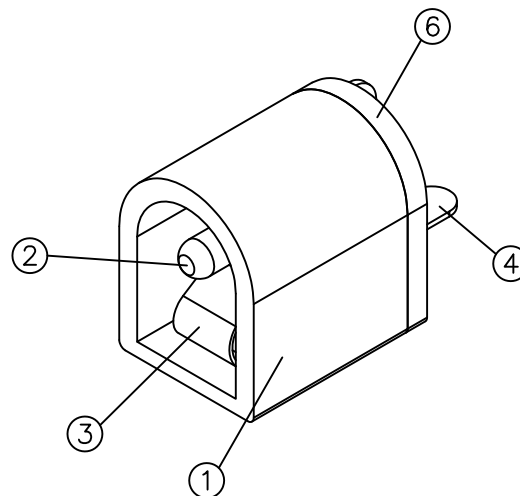
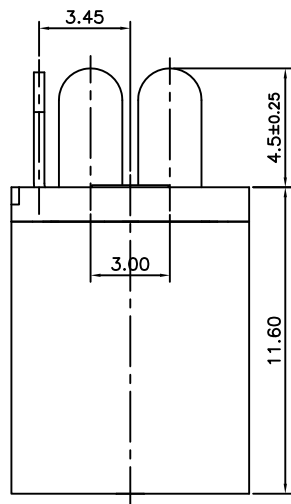
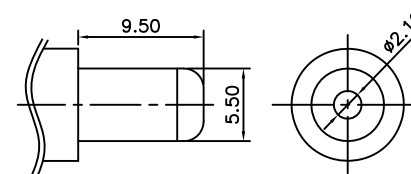


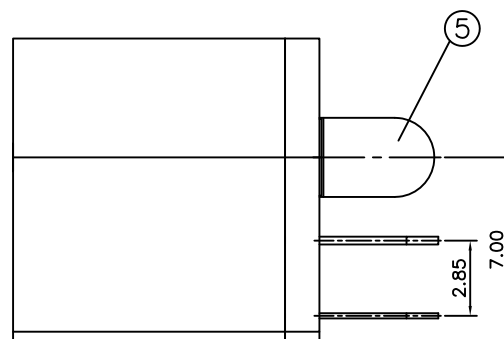

COMMENDED PCB LAYOUT(TOP VIEW)
ALL TOLERANCE ± 0.03 mm

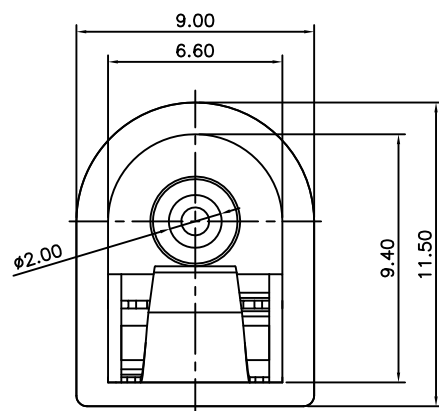

mating plug
(SCALE 2:1)



6	BACK-COVER	1	P.B.T.	BLACK	-
5	POWER TERMINAL	1	COPPER ALLOY	Nickel 80u" plated	-
4	CONTACT TERMINAL	1	STAINLESS	Nickel 80u" plated	-
3	SPRING TERMINAL	1	COPPER ALLOY	Nickel 80u" plated	-
2	MATERIAL PIN	1	COPPER ALLOY	Nickel 80u" plated	-
1	HOUSING	1	P.B.T.	BLACK	-
NO.	PART NAME	Q'TY	MATERIAL	FINISH	REMARKS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DCJ-DH11-20-LF
SERIES T T LEADFREE
2.0Ø
HIGH 11.6mm
180° SMT

DESCRIPTION: DC JACK CONNECTOR 2.5mm VERTICAL TYPE