


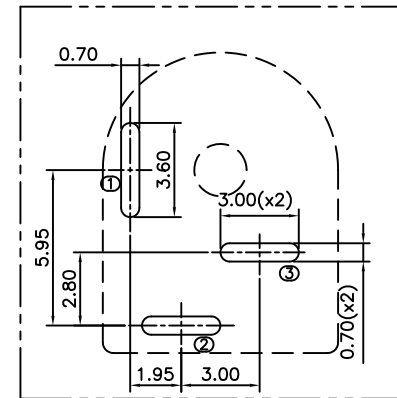
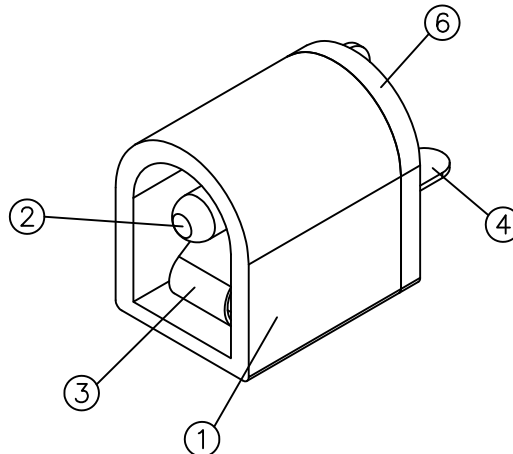
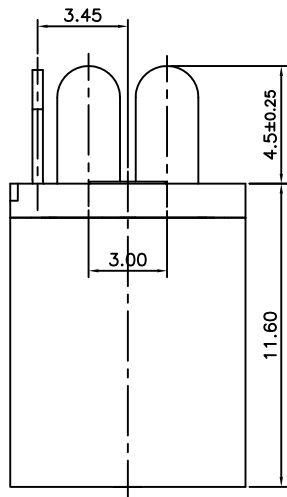
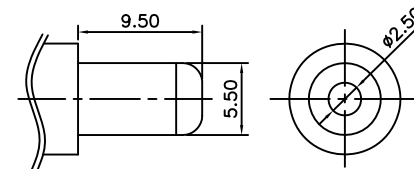


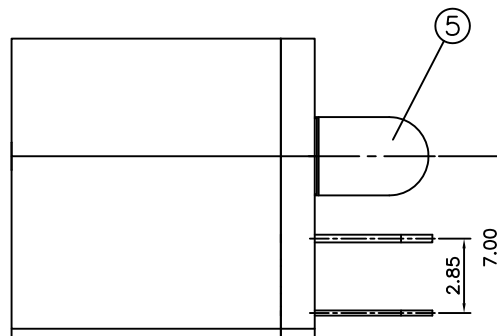

COMMENDED PCB LAYOUT(TOP VIEW)  
ALL TOLERANCE  $\pm 0.03$  mm

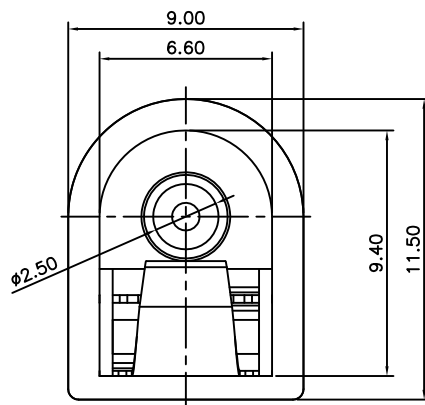

mating plug  
(SCALE 2:1)



| 6   | BACK-COVER       | 1    | P.B.T.       | BLACK              | -       |
|-----|------------------|------|--------------|--------------------|---------|
| 5   | POWER TERMINAL   | 1    | COPPER ALLOY | Nickel 80u" plated | -       |
| 4   | CONTACT TERMINAL | 1    | STAINLESS    | Nickel 80u" plated | -       |
| 3   | SPRING TERMINAL  | 1    | COPPER ALLOY | Nickel 80u" plated | -       |
| 2   | MATERIAL PIN     | 1    | COPPER ALLOY | Nickel 80u" plated | -       |
| 1   | HOUSING          | 1    | P.B.T.       | BLACK              | -       |
| NO. | PART NAME        | Q'TY | MATERIAL     | FINISH             | REMARKS |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X.  $\pm$   
.X  $\pm$   
.XX  $\pm$   
.XXX  $\pm$   
ANG  $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DCJ-DH11-25-LF  
SERIES T LEADFREE  
2.5Ø  
HIGH 11.6mm  
180° SMT

DESCRIPTION: DC JACK CONNECTOR 2.5mm VERTICAL TYPE