


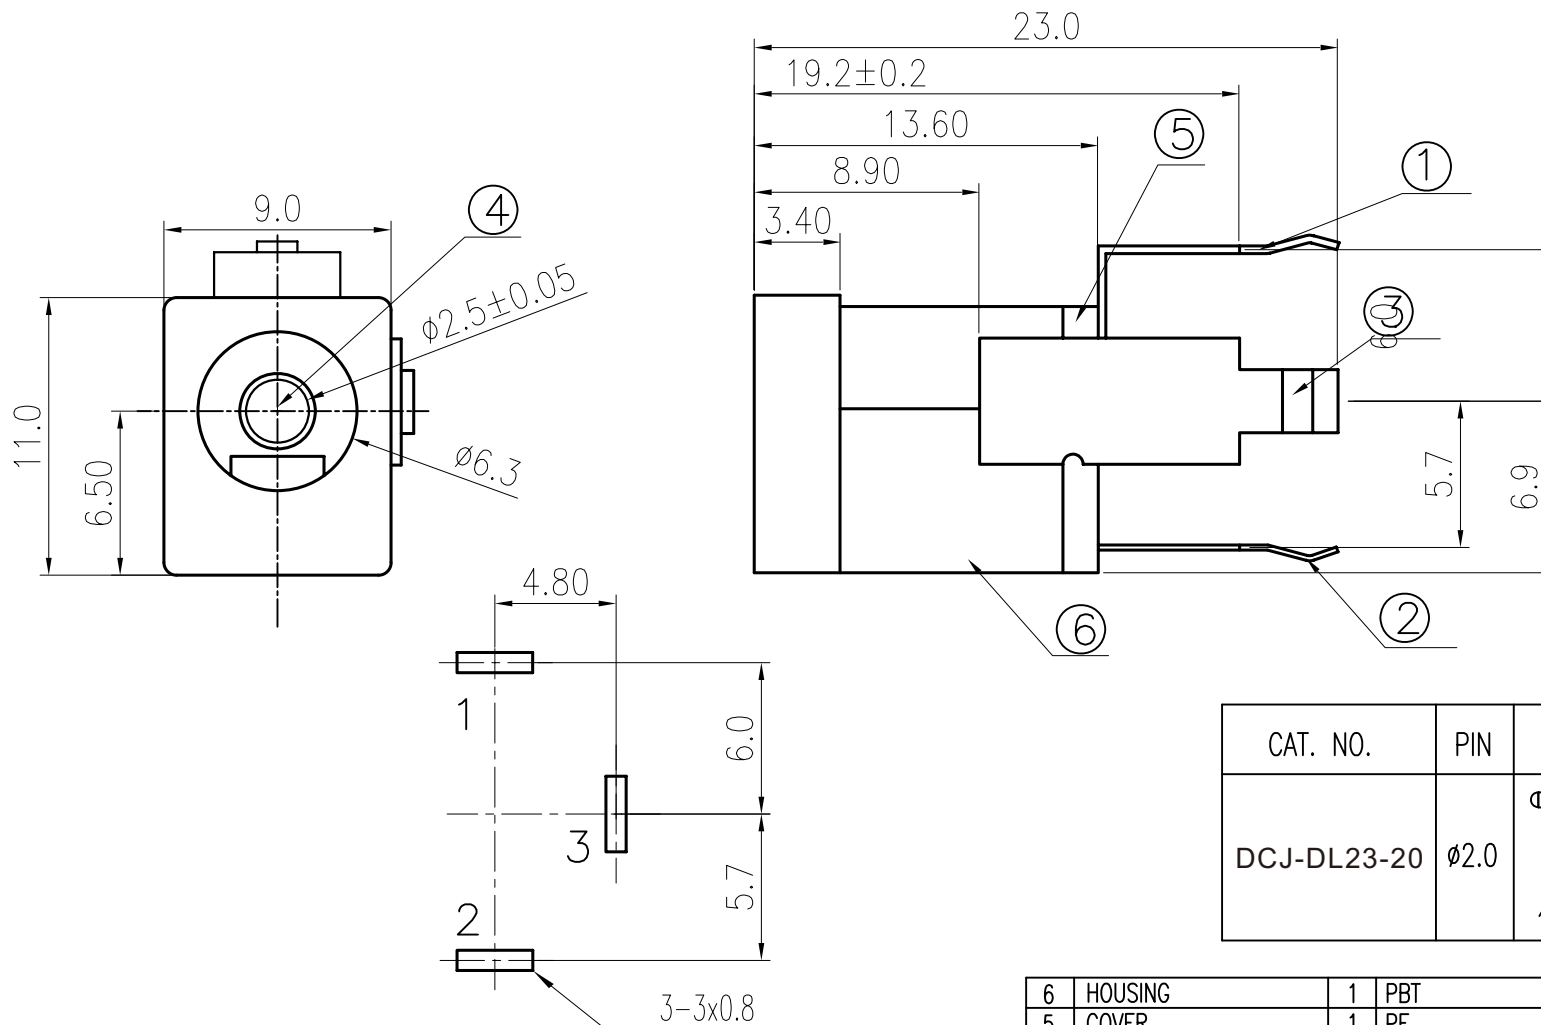

T:1.6 Dimensions of PC board holes

Tolerance : ± 0.05 (Printed-top view)

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

CAT. NO.	PIN	SCHEMATIC
DCJ-DL23-20	$\phi 2.0$	

QTY	PART NAME	MATERIAL	REMARK
1	HOUSING	PBT	UL-94V0(BLACK)
1	COVER	PF	
1	CENTER PIN	H59(COPPER ALLOY)	Cu/Sn PLATED
1	SHUNT TERMINAL	C2680 t=0.30	Sn PLATED
1	TIP SPRING	C5191 t=0.30	Sn PLATED
1	CENTER PIN TERMINAL	C2680 t=0.30	Sn PLATED

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

ORDER INFORMATION

DCJ-DL23-20-LF
SERIES T T LEADFREE
2.00
LONG 23.0mm
DIP 180°

DESCRIPTION: DC POWER JACK