

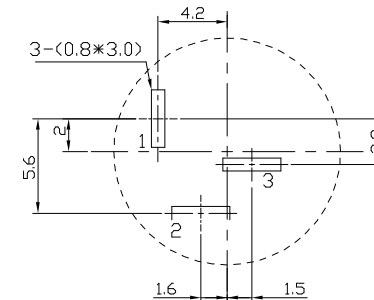
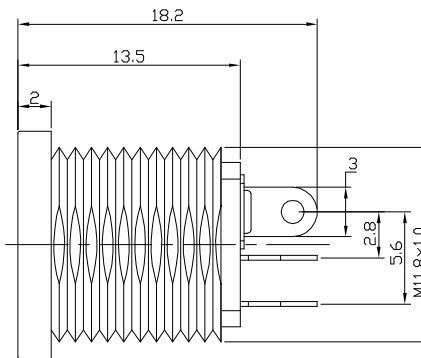
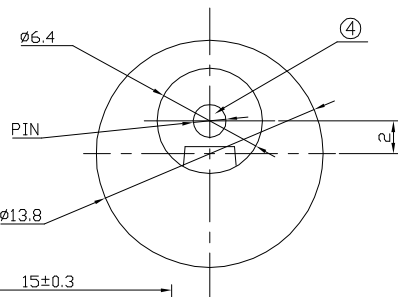
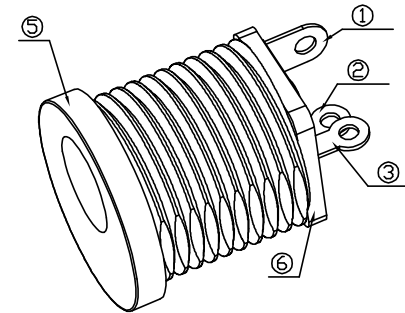


CAT. NO.	PIN	SCHEMATIC
DCJ-DPAHN-20	Ø2.0	○ 1
DCJ-DPAHN-25	Ø2.5	○ 3
		△ 2



T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)

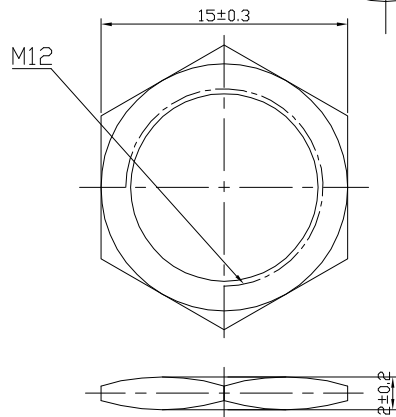

7	NUT	1	H59(COPPER ALLOY)	Ni PLATED
6	COVER	1	PF	
5	HOUSING	1	PA66	BLACK
4	PIN	1	H59(COPPER ALLOY)	Ni PLATED
3	CONTACT FOOT	1	C2680 t=0.30	Ag PLATED
2	SPRING	1	C5191 t=0.30	Ag PLATED
1	FLAT PIECE	1	C2680 t=0.30	Ag PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DCJ-DPAHN-xx-LF
SERIES
DIP 180°
LEADFREE
20:2.0 Ø
25:2.5 Ø
NUT
H TYPE
PANEL FRONT

DESCRIPTION: DC POWER JACK