


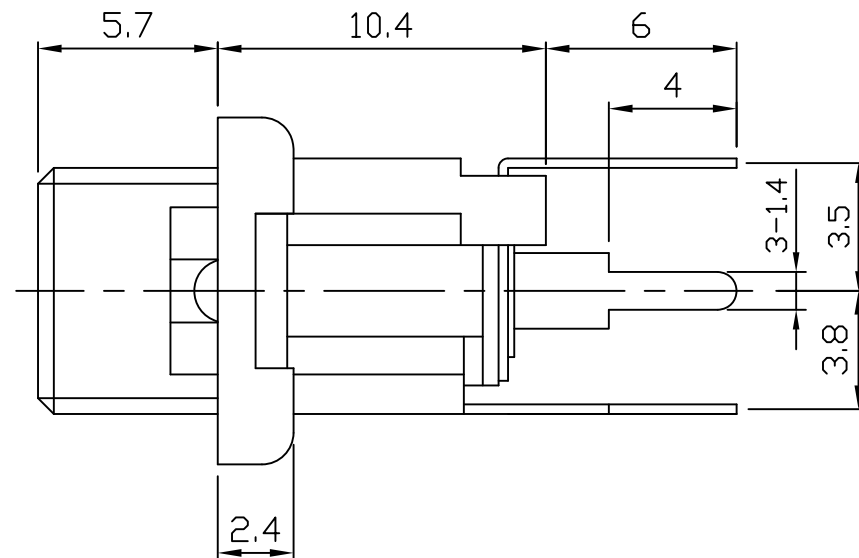
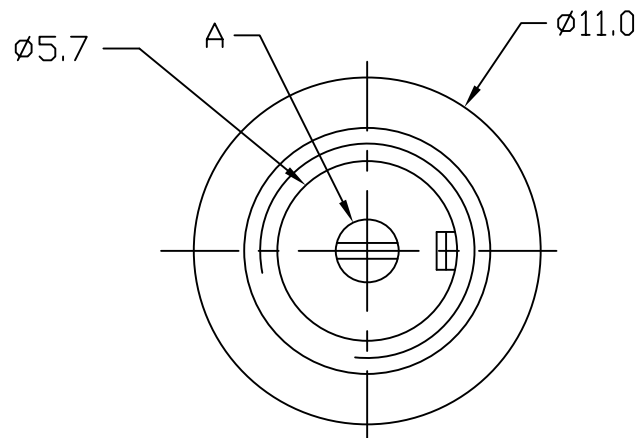


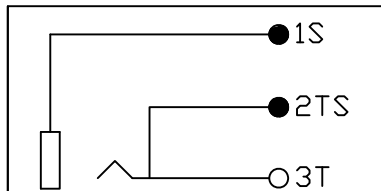

PLUG

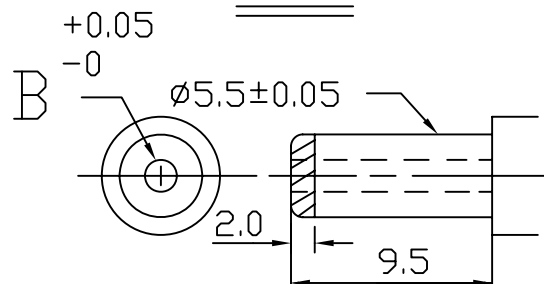

7	HOUSING	1	PBT		BLACK
6	INSULATOR	2	RED VULCANIZED FIBRE		RED
5	PIN	1	COPPER	NICKEL	
4	BUSHING	1	BRASS	NICKEL	
3	PIN TERMINAL	1	BRASS	SILVER Δ	
2	BREAK TERMINAL	1	BRASS	SILVER Δ	
1	SLEEVE SPRING	1	P.B.S	SILVER Δ	
NO	PART NAME	Q'TY	MATERIAL	PLATED	REMARK

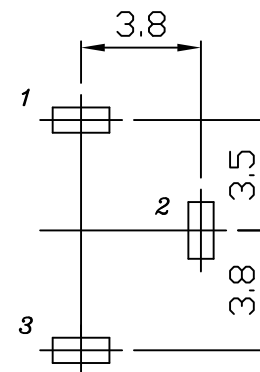

P.C.B LAYOUT (± 0.1)
(BOTTOM VIEW)

P/N	Dimension	
	A	B
DCJ-DPB33-20	$\phi 2.0$	$\phi 2.05$
DCJ-DPB33-25	$\phi 2.5$	$\phi 2.55$

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PROJECTION Φ

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$

照片框

ORDER INFORMATION

DCJ-DPB33-xx-LF
SERIES | | | LEADFREE
20:2.0 ϕ
25:2.5 ϕ
3.8mm+3.8mm
DIP 180° BACK PANEL

DESCRIPTION: DC POWER JACK