

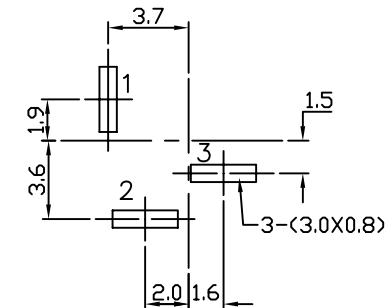

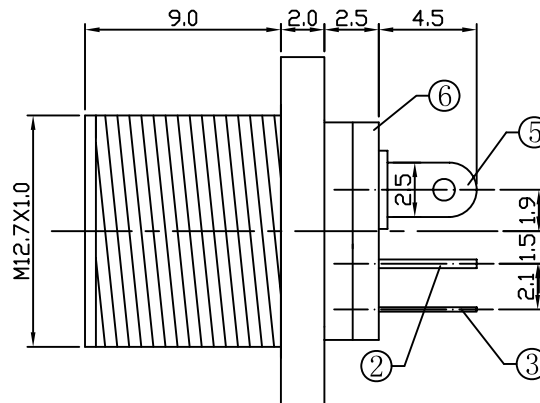


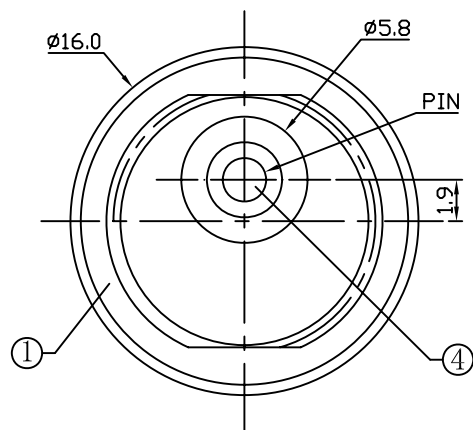

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)

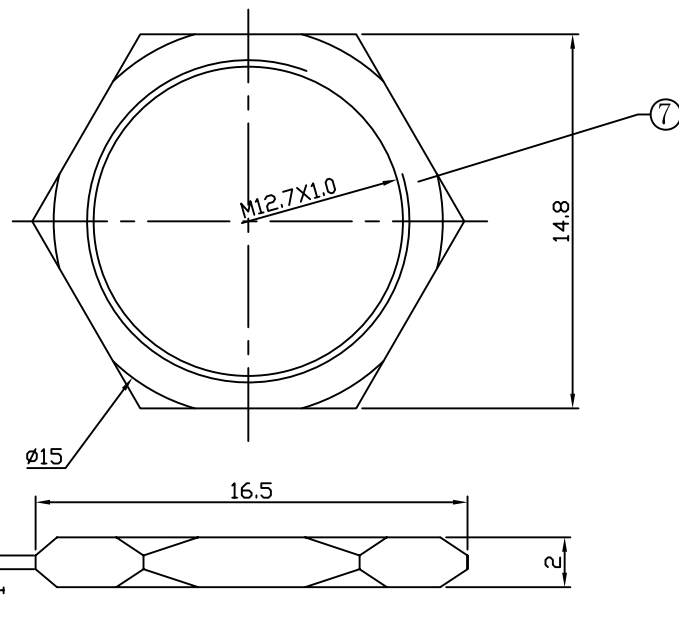

7	NUT	1	H59(COPPER ALLOY)	Cu/Sn PLATED
6	COVER	1	PF	
5	CONTACT FOOT	1	C2680	Sn PLATED
4	PIN	1	H59(COPPER ALLOY)	Ni PLATED
3	SPRING	1	SUS 301	Sn PLATED
2	FLAT PIECE	1	C2680	Sn PLATED
1	HOUSING	1	PBT 4815	UL-94V0(BLACK)
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

DCJ-DPBHN-25-LF

SERIES
LEADFREE
2.50
NUT
H TYPE
PANEL BACK
DIP 180°

DESCRIPTION: DC POWER JACK