

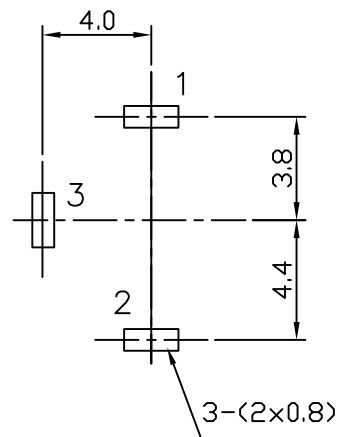


✱Rated voltage/Rated current :12V/5A

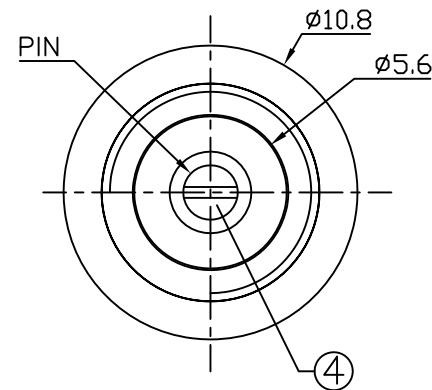

T:1.6 Dimensions of PC board holes
Tolerance : ±0.1(Printed-top view)

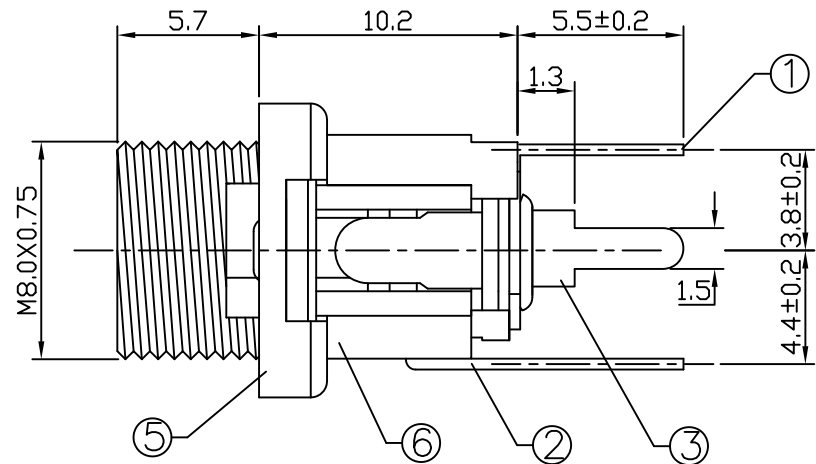

CAT. NO.	PIN	SCHEMATIC
DCJ-DPBT5-20	Ø2.0	

6	HOUSING	1	PBT 4815	UL-94V0(BLACK)
5	AXIS SUPPORT	1	C2680	MB:Cu Ni PLATED
4	PIN	1	C2680	MB:Cu Ni PLATED
3	SPRING	1	C5191	MB:Cu Sn PLATED
2	CURVE PIECE	1	C2680	MB:Cu Sn PLATED
1	FLAT PIECE	1	C2680	MB:Cu Sn PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DCJ-DPBT5-20-LF

SERIES

DIP 180°

LEADFREE

BACK

PANEL

2.00

THREAD 5.7mm

DESCRIPTION: DC POWER JACK