
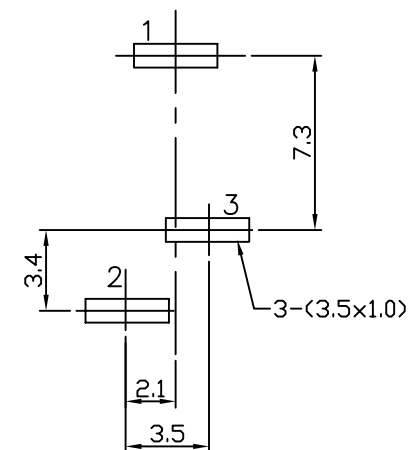
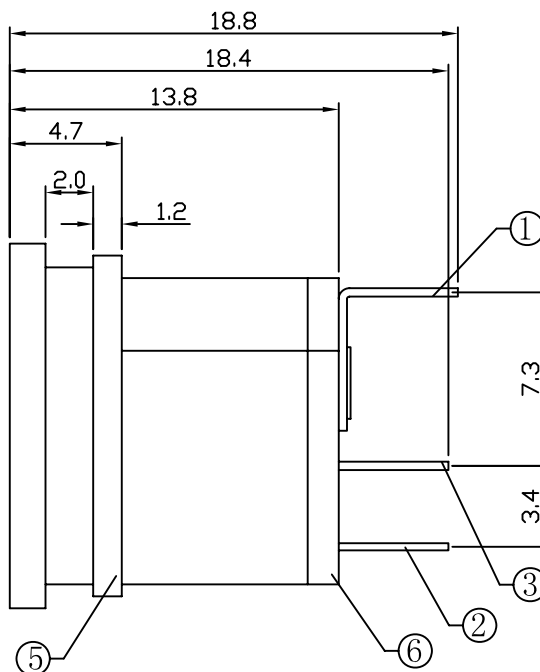


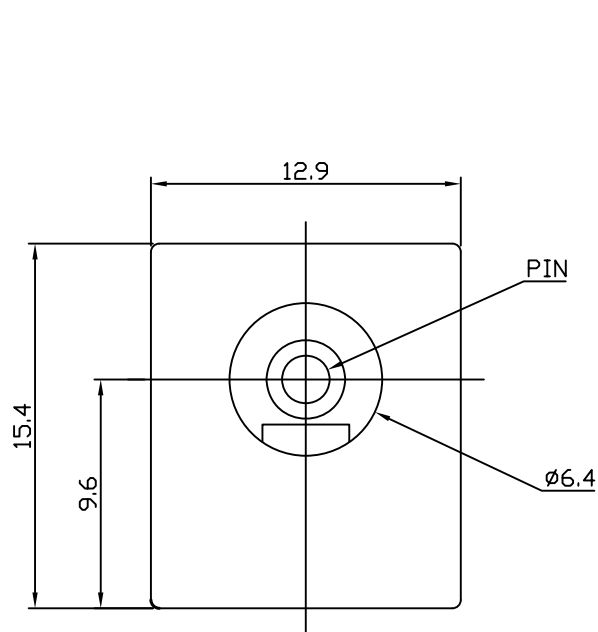

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)

SCHEMATIC	B	$\phi 2.5$	
-----------	---	------------	--

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

6	COVER	1	PF	
5	HOUSING	1	PBT 4815	UL-94V0 (BLACK)
4	CENTER PIN	1	C2680	Sn PLATED
3	SHUNT TERMINL	1	C2680	Ag PLATED
2	TIP SPRING	1	C5191	Ag PLATED
1	CENTER PIN TERMINAL	1	C2680	Ag PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

DCJ-DPC-25-LF
SERIES T T T LEADFREE
2.5Ø
C TYPE
PANEL
DIP 180°

DESCRIPTION: DC POWER JACK