

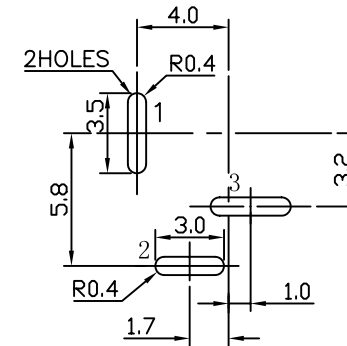
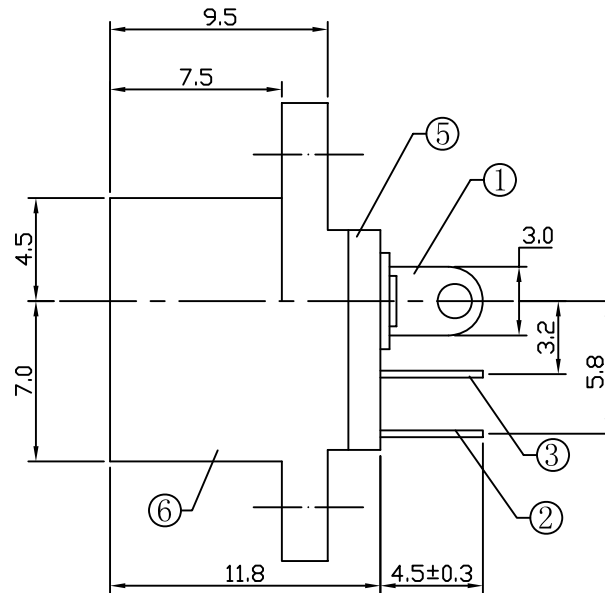


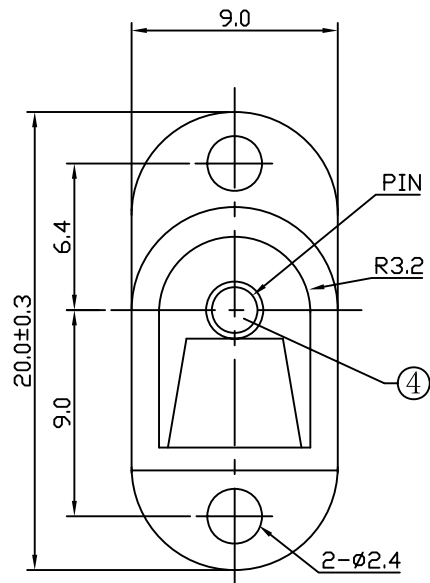

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)

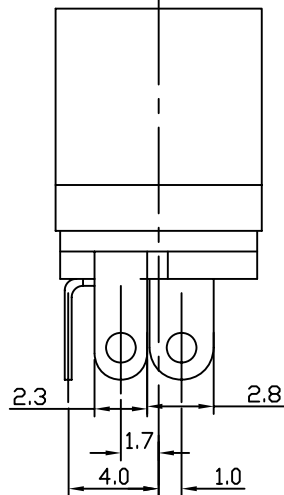

CAT. NO.	PIN	SCHEMATIC
DCJ-DPE16B-25	∅2.5	

6	HOUSING	1	PBT 4815	UL-94V0(BLACK)
5	COVER	1	PF	
4	PIN	1	H59(COPPER ALLOY)	Cu/Sn PLATED
3	CONTACT FOOT	1	C2680 t=0.30	Sn PLATED
2	SPRING	1	C5191 t=0.30	Sn PLATED
1	FLAT PIECE	1	C2680 t=0.30	Sn PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

DCJ-DPE16B-25-LF
SERIES | | | LEADFREE
DIP 180° | | | 2.5∅
| | | OPEN TOP
| | | 16.3mm
| | | PANEL EAR

DESCRIPTION: DC POWER JACK