

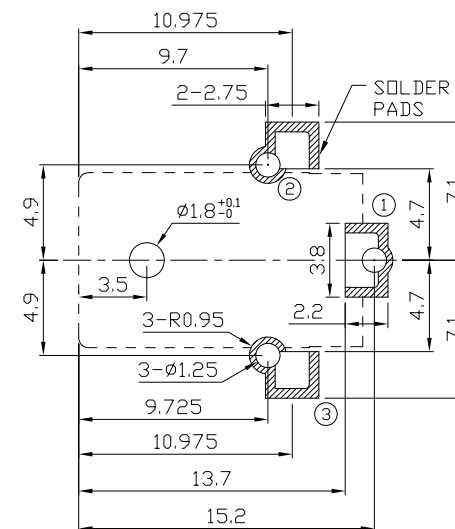
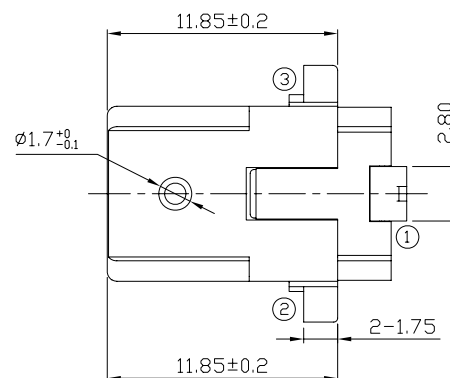


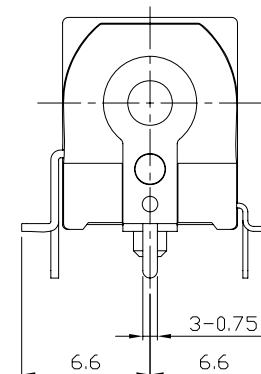
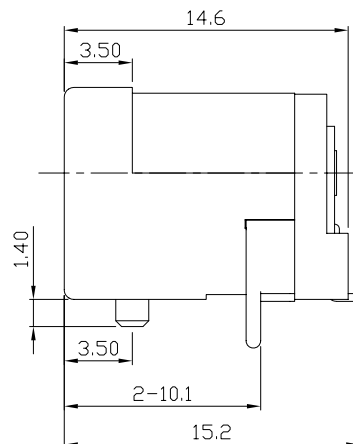


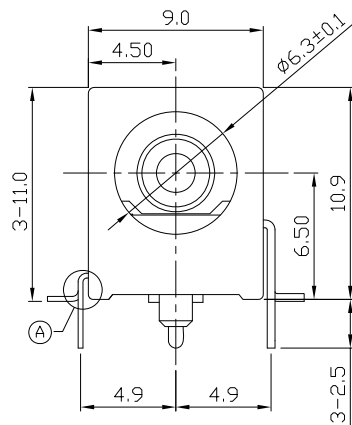


RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05
(TOP VIEW)



DC MATE PLUG

CAT. NO.	PIN
DCJ-R30ER-20	Ø2.0
DCJ-R30ER-25	Ø2.5



6	COVER	1	PA10T		BLACK
5	HOUSING	1	PA10T		BLACK
4	PIN	1	COPPER	Nickel	
3	TERMINAL 3	1	BRASS	Silver	
2	TERMINAL 2	1	P.B.S	Silver	
1	TERMINAL 1	1	BRASS	Silver	
NO	PART NAME	Q'TY	MATERIAL	PLATED	REMARK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X ± 0.50

.X ± 0.30

.XX ± 0.15

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DCJ-R30E-xx-LF
SERIES T T LEADFREE
20:2.00
25:2.50
EAR
POST 3.0mm
DIP 90°

DESCRIPTION: DC JACK (SMT)