


✱ Rated voltage/ Rated current : 24V/3A

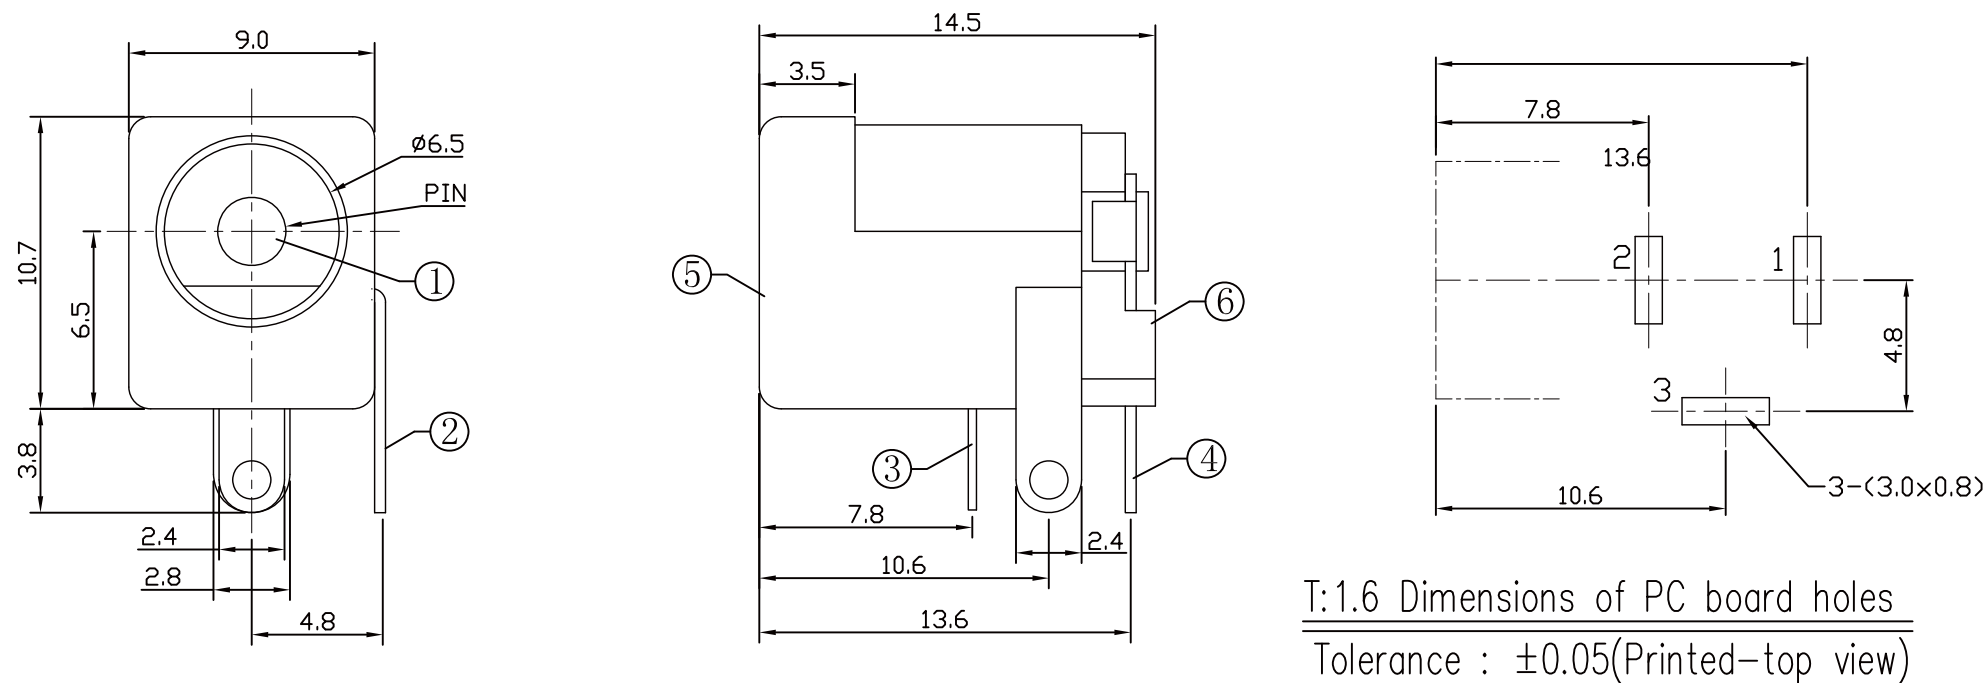

CAT. NO.	PIN	SCHEMATIC
DCJ-R3A-20	$\varnothing 2.0$	

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

6	COVER	1	PBT 4815	UL-94V0(BLACK)
5	HOUSING	1	PBT 4815	UL-94V0(BLACK)
4	FLAT PIECE	1	C2680 t=0.4	Sn PLATED
3	SPRING	1	C5191 t=0.3	Sn PLATED
2	CURVE PIECE	1	C2680 t=0.4	Sn PLATED
1	PIN	1	C3604(COPPER ALLOY)	Ni PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

DCJ-R3A-20-LF
SERIES LEADFREE
3A 2.0Ø
DIP 90°

DESCRIPTION: DC POWER JACK



1 封塑袋=1x500pcs
 =500pcs
 1 内盒=1x500pcs
 =500pcs
 1 Big Carton=20x500pcs
 =10000pcs

1 封塑袋 Dimension
 =LxWxH
 =220x240x0.14

1 内盒 Dimension
 =LxWxH
 =190x165x50

1 Big Carton Dimension
 =LxWxH
 =400x340x290

Unit:mm

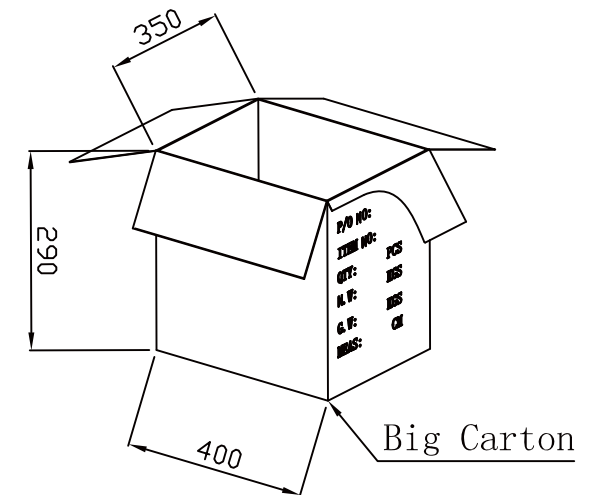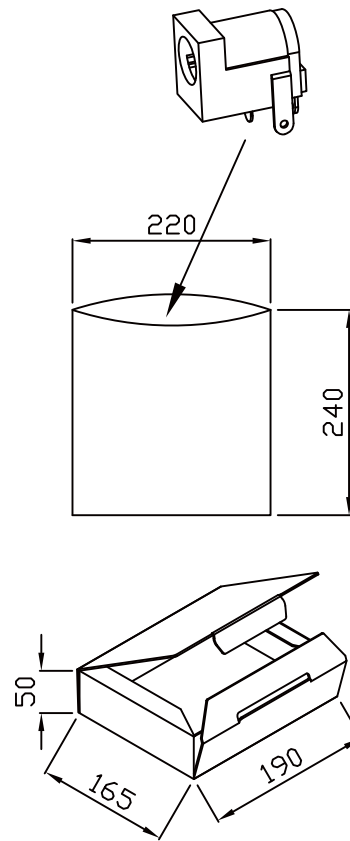

淨重=18.4 KG
 毛重=19.4KG

單位: cm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

DCJ-R3A-20-LF
 SERIES LEADFREE
 3A 2.0Ø
 DIP 90°

DESCRIPTION: DC POWER JACK