

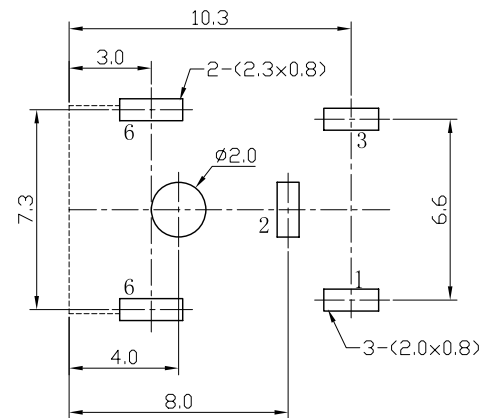
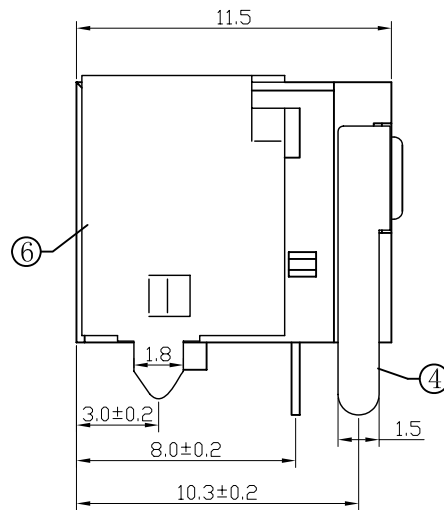
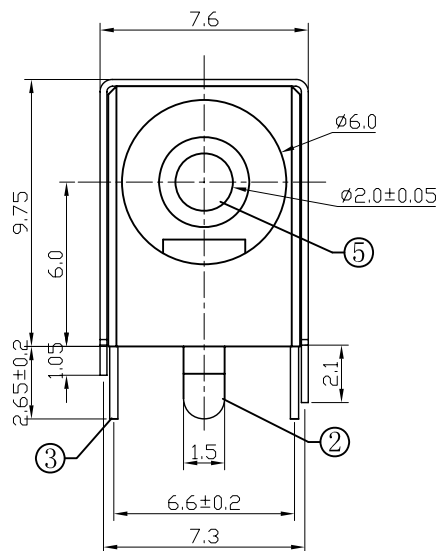


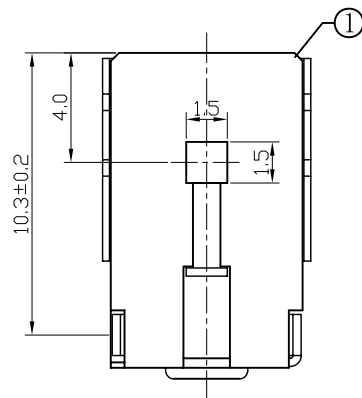

T:1.6 Dimensions of PC board holes

Tolerance : ± 0.05 (Printed-top view)

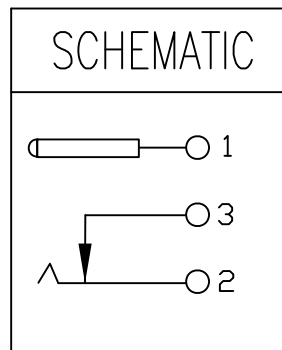

6	COAT	1	C2680	t=0.25	Ni	PLATED
5	PIN	1	H59(COPPER ALLOY)		Ni	PLATED
4	CONTACT FOOT	1	C2680	t=0.30	Ag	PLATED
3	CURVE PIECE	1	C2680	t=0.30	Ag	PLATED
2	SPRING	1	SUS301	t=0.30	Ag	PLATED
1	HOUSING	1	PBT 4815		UL-94V0(BLACK)	
LTR	PART NAME	QTY	MATERIAL	REMARK		

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

DCJ-R40M-20-LF
SERIES T T T LEADFREE
20:2.00
METAL
POST 4.0mm
DIP 90°

DESCRIPTION:DC POWER JACK