
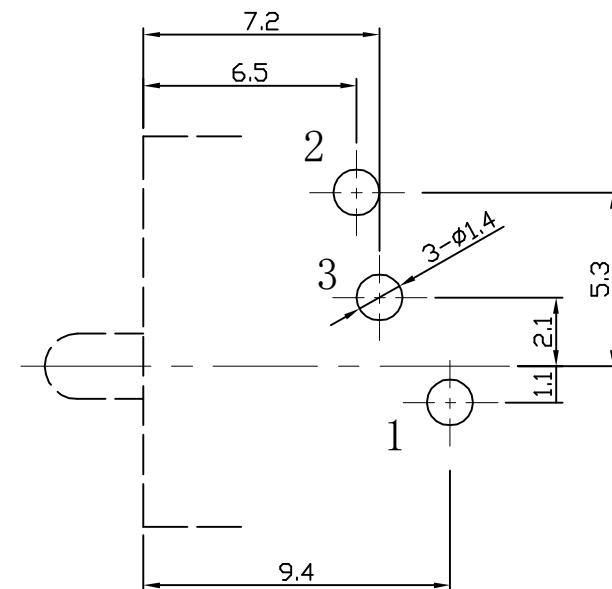
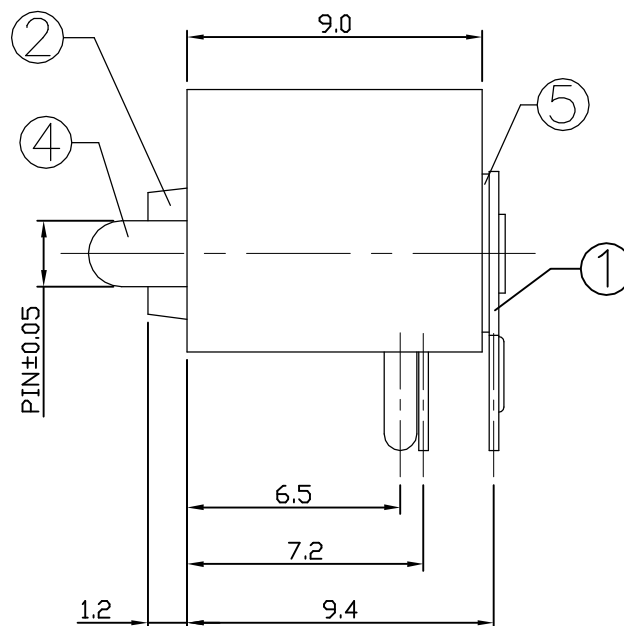


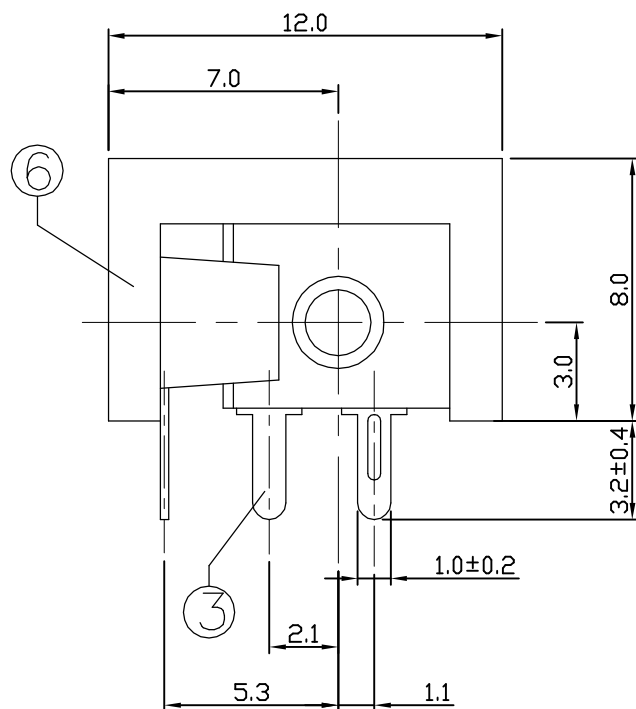

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)

CAT. NO.	PIN	SCHEMATIC
DCJ-R60-20	$\phi 2.0$	
DCJ-R60-25	$\phi 2.5$	
DCJ-R60-235	$\phi 2.35$	

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

6	HOUSING	1	PBT 4815	UL-94V0(BLACK)
5	COVER	1	PF	
4	CENTER PIN	1	H59(COPPER ALLOY)	Ni PLATED
3	SHUNT TERMINAL	1	C2680	Ag PLATED
2	TIP SPRING	1	SUS301	Ag PLATED
1	CENTER PIN TERMINAL	1	C2680	Ag PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

DCJ-R60-xx-LF
SERIES T LEADFREE
20:2.00
25:2.50
235:2.350
PIN TO PIN 6.9mm
DIP 90°

DESCRIPTION: DC POWER JACK