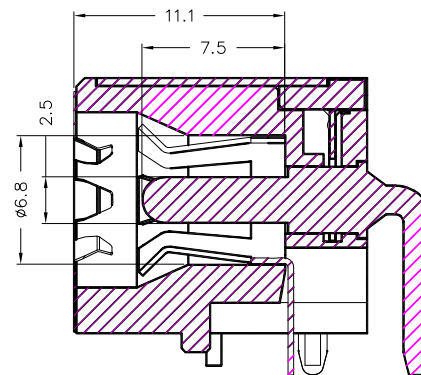

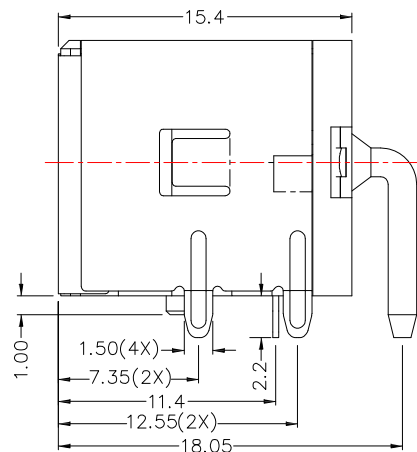
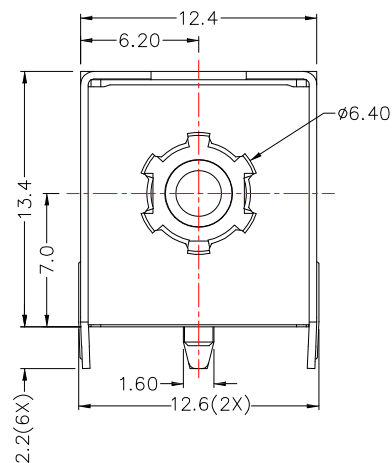



MODEL NO.	DCJ-R64M10A-25
SCHEMATIC	
CENTER PIN	Ø2.5mm

*MATERIAL



TERMINAL 1 : BRASS
 TERMINAL 2 : PHOSPHOR BRONZE
 STOPPER : C.R.STEEL
 SHIELD-A : C.R.STEEL
 SHIELD-B : STAINLESS STEEL
 HOUSING : PA6T
 COVER : PA6T

SPECIFICATION

1. Rating : DC 20V 10A or 20V 7A
2. Contact resistance : $\leq 50\text{m}\Omega$
3. Insulation resistance : $\geq 100\text{M}\Omega$
4. Withstand voltage : 500VAC
5. Insertion and extraction force : 3-30N
6. Life test : 5,000 cycles

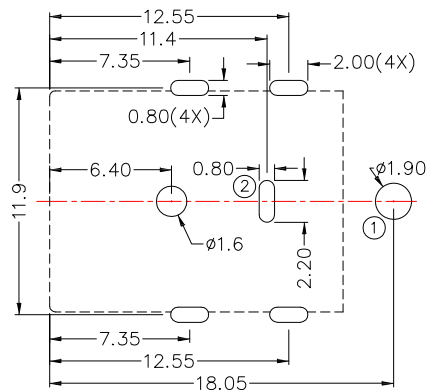

PCB LAYOUT
(TOP VIEW)

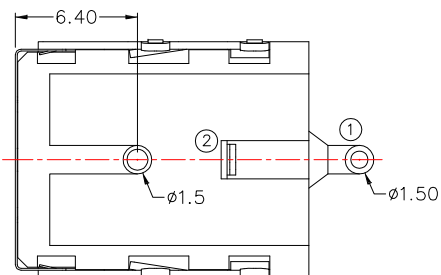

DC MATE PLUG
RATING: DC 20V 10A

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE
 SIZE A4

Up to 5 ± 0.2
 Above 5 ~ 15 ± 0.3
 Above 15 ~ 30 ± 0.4
 Above 30 ~ 50 ± 0.5
 Angle $\pm 0.3^\circ$

PPOJECTION

照片框

ORDER INFORMATION

DCJ-R64M10A-25-LF
 SERIES LEADFREE
 10A
 METAL
 POST 6.4mm
 DIP 90°

DESCRIPTION: DC JACK

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com