

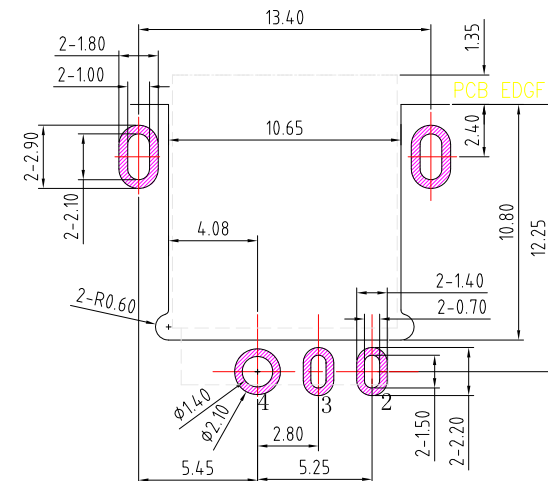
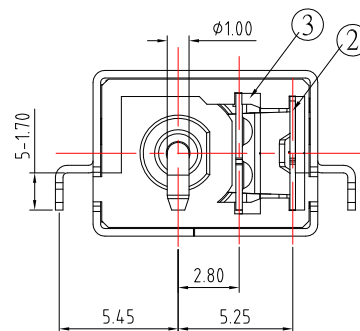
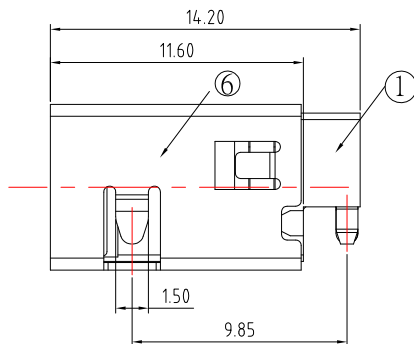
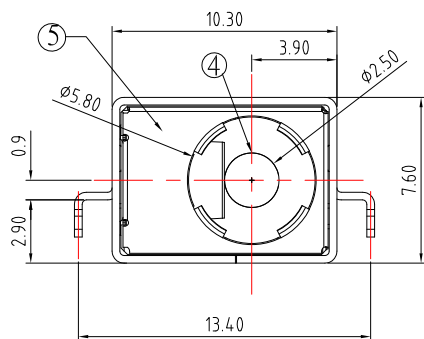


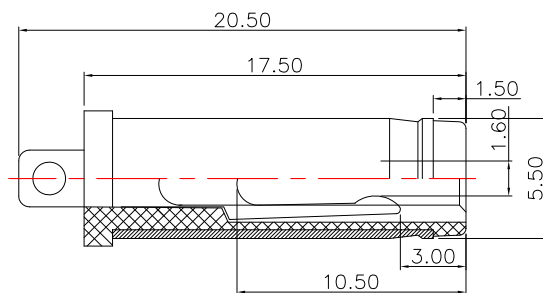


P.C.B LAYOUT
TOP VIEW

SPECIFICATION

- 1.Rating : DC 24V 5.0A ;
- 2.Contact resistance : $\leq 30m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion force : 3-30N;
extraction force : 3-30N;
- 6.life test : 5,000 cycles °



MATING PLUG $\phi 5.50$



Model No.	
SCHEMATIC	
CENTER PIN	$\phi 2.00$ mm
	$\phi 2.50$ mm

⑦	STOPPER	1	SUS	
⑥	SHELL	1	BRASS	Ni-Plating
⑤	GROUND	1	SUS	
④	PIN	1	BRASS	Ni-Plating
③	CONTACT FOOT	1	BRASS	Ni-Plating
②	SPRING	1	PHOSPHOR BRONZE	Ni-Plating
①	HOUSING	1	LCP	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

照片框

ORDER INFORMATION

DCJ-RFM-xx-LF
SERIES T T LEADFREE
20:2.00
25:2.50
METAL
OFFSET
DIP 90°

DESCRIPTION: DC JACK