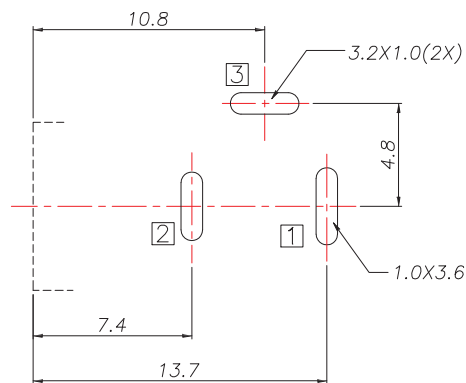
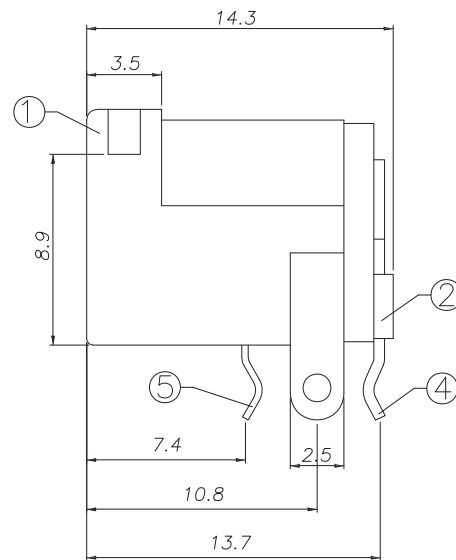
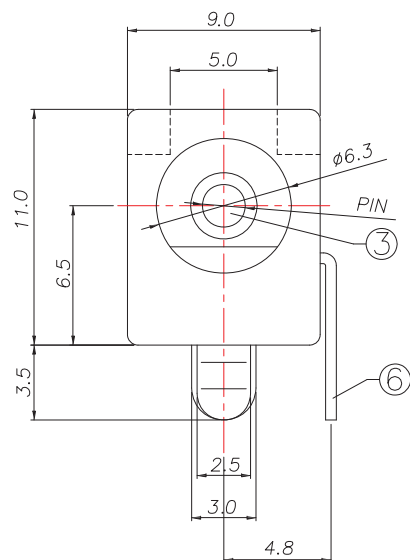


Model NO.	DCJ-RK-20	DCJ-RK-235	DCJ-RK-25
PIN(X)	φ2.0	φ2.35	φ2.5

SPECIFICATION

- 1.Rating : DC 20V 4.0A
- 2.Contact resistance : $\leq 30\text{m}\Omega$
- 3.Insulation resistance : $\geq 100\text{M}\Omega$
- 4.Withstand voltage : 500VAC
- 5.Insertion and extraction force : 3-30N
- 6.life test : 5,000 cycles

6	Shunt Terminal	3	1	Brass	Tin Plating
5	Tip Spring	2	1	Phosphor Bronze	Tin Plating
4	Center Pin Terminal	1	1	Brass	Tin Plating
3	Center Pin	1	1	Brass	CuSn/Ni Plating
2	Cover		1	PBT	Black
1	Housing		1	PBT	
NO.	DESCRIPTION	QTY		MATERIAL	REMARK

RECOMENDED P.C.B LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

照片框

ORDER INFORMATION

DCJ-RK-(20)(235)(25)-LF

SERIES

KINK

20:2.0Ø
235:2.35Ø
25:2.5Ø
DIP 90°

LEADFREE

DESCRIPTION: DC JACK