
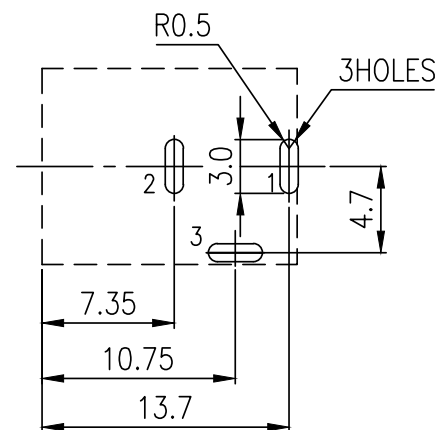
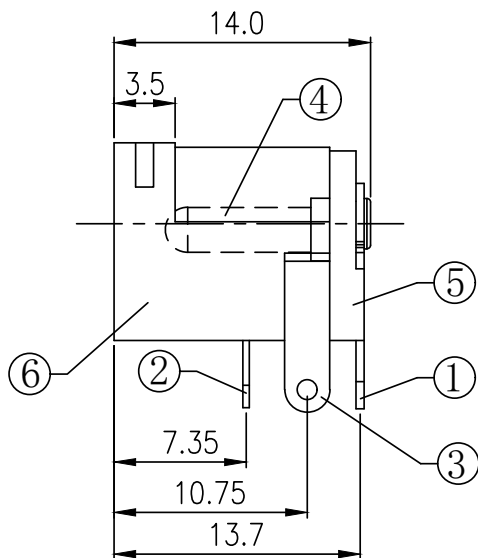
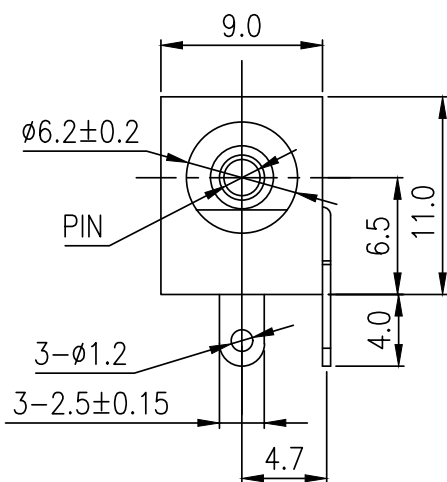





T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)

CAT NO.	PIN	SCHEMATIC
DCJ-RPU-20	$\varnothing 2.0$	

6	HOUSING	1	PBT 4815	UL-94V0(BLACK)
5	COVER	1	PBT 4815	UL-94V0(BLACK)
4	PIN	1	H59(COPPER ALLOY)	Ni PLATED
3	TERMINAL	1	C2680 t=0.35	Sn PLATED
2	TERMINAL	1	C5191 t=0.25	Sn PLATED
1	TERMINAL	1	C2680 t=0.35	Sn PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

DCJ-RPU-20-LF
SERIES T T T LEADFREE
2.00
U TYPE
PANEL
DIP 90°

DESCRIPTION: DC POWER JACK