
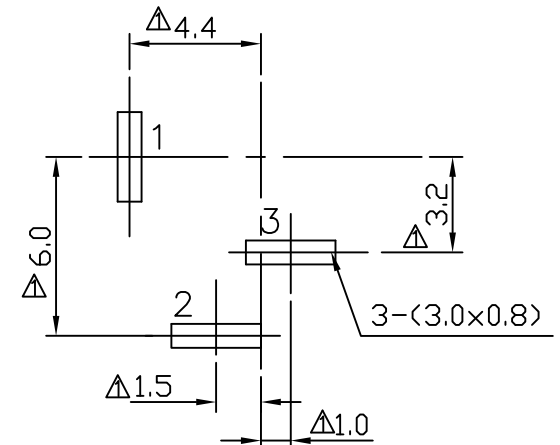
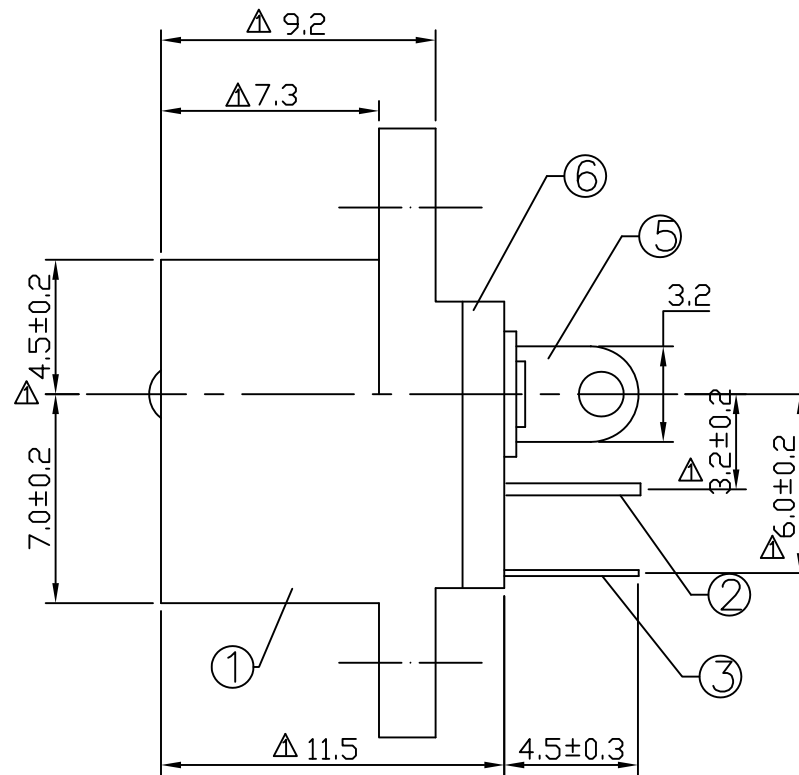


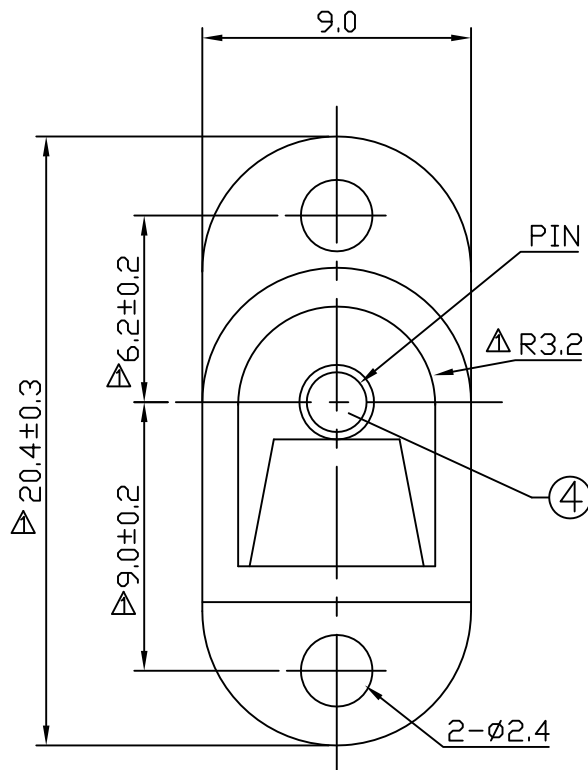

T:1.6 Dimensions of PC board holes
Tolerance : ±0.1(Printed-top view)

CAT. NO.	PIN	SCHEMATIC
DCJ-SPE16B-20	Ø2.0	

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ±0.3

6	COVER	1	PBT 4815	UL-94V0(BLACK)
5	CONTACT FOOT	1	C2680	MB:Cu Cu/Sn PLATED
4	PIN	1	C2680	MB:Cu Ni PLATED
3	SPRING	1	SUS 301	MB:Ni Cu/Sn PLATED
2	FLAT PIECE	1	C2680	MB:Cu Cu/Sn PLATED
1	HOUSING	1	PBT 4815	UL-94V0(BLACK)
LTR	PART NAME	QTY	MATERIAL	REMARK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DCJ-SPE16B-20-LF
SERIES
LEADFREE
2.00
OPEN TOP
16.3mm
PANEL EAR
SOLDER

DESCRIPTION: DC POWER JACK