
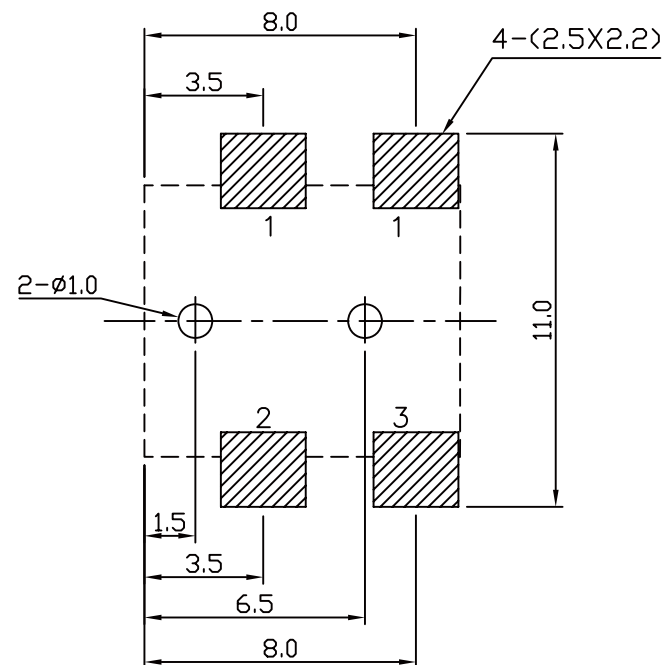
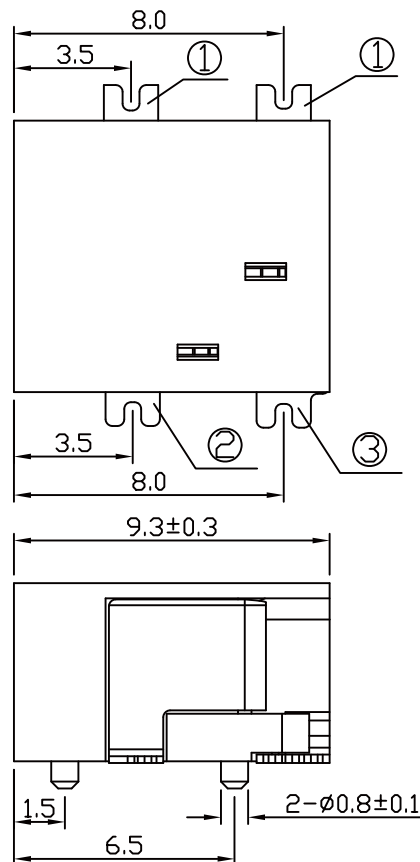
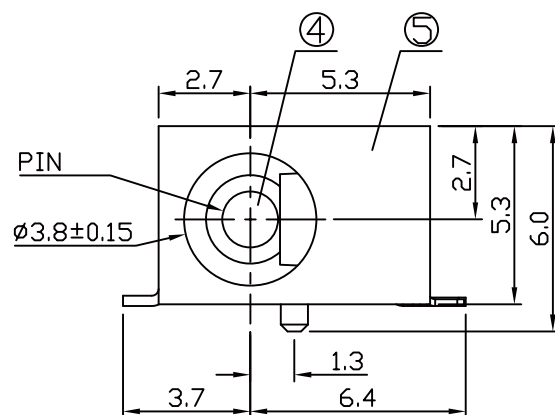


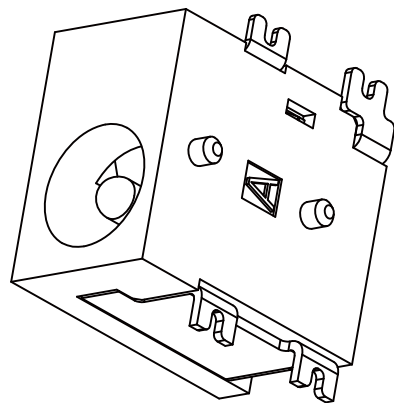

T:1.6 Dimensions of PC board holes
 Tolerance : ± 0.05 (Printed-top view)

SCHEMATIC		
DCJ-W15R-10	$\phi 1.0$	○ 1
DCJ-W15R-13	$\phi 1.3$	○ 3
		○ 2

5	HOUSING	1	PA9T	UL-94V0(BLACK)
4	PIN	1	H59(COPPER ALLOY)	Cu/Sn PLATED
3	TERMINAL 3#	1	C2680 t=0.25	Ag PLATED
2	TERMINAL 2#	1	SUS301 t=0.25	Ag PLATED
1	TERMINAL 1#	1	C2680 t=0.30	Ag PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.2

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
 .X $\pm$
 .XX $\pm$
 .XXX $\pm$
 ANG $\pm$

PJECTION




ORDER INFORMATION



DCJ-W15R-xx-LF

SERIES T LEADFREE
 10:1.00
 13:1.30
 REEL
 POST 1.5+5.0mm
 90°SMT



DESCRIPTION:

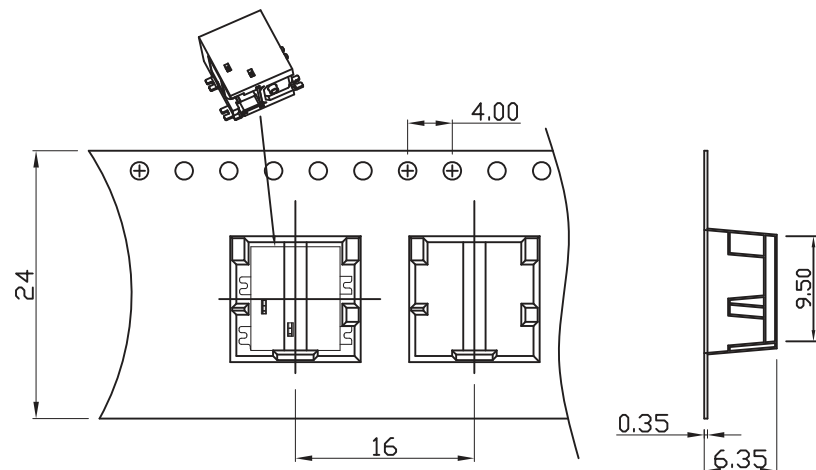

COVER TAPE
PEELING ANGLE:165°~180°
PEELING FORCE:20~130g

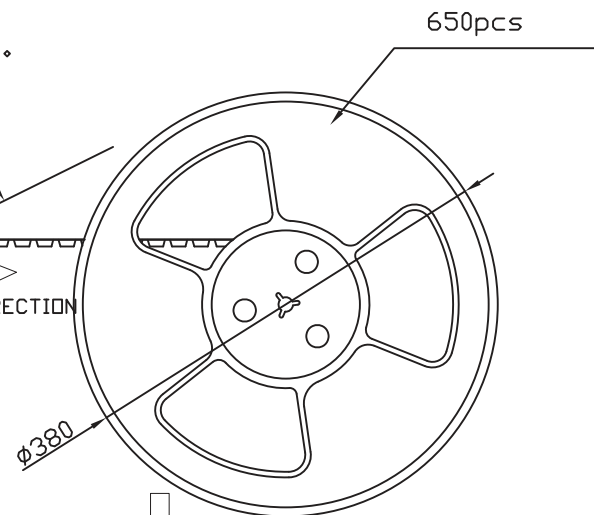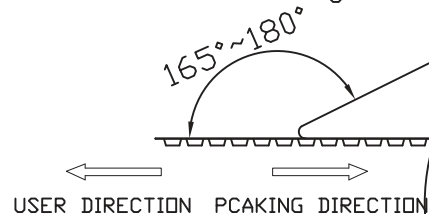

CARTON=10REEL*650PCS
=6500PCS

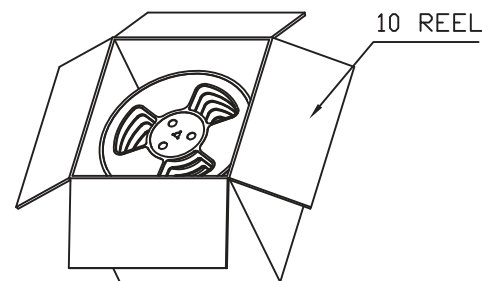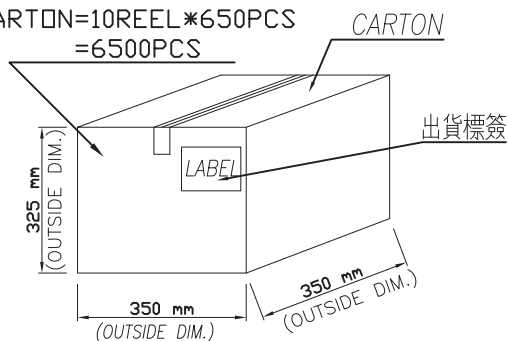

包裝方式及數量:

1. 如上圖所示, 產品錫腳朝下依次序放入載帶中. 包裝時載帶前端空10PCS不放置產品. 每卷放置產品650PCS, 在卷盤上面貼好標籤.

2. 如上圖所示將包裝好的卷盤平放入外箱中, 每個外箱疊放13卷卷盤, 封箱貼好標籤.

合計: 6500PCS/箱

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

DCJ-W15R-xx-LF
SERIES | | LEADFREE
10:1.00
13:1.30
REEL
POST 1.5+5.0mm
90°SMT

DESCRIPTION: