
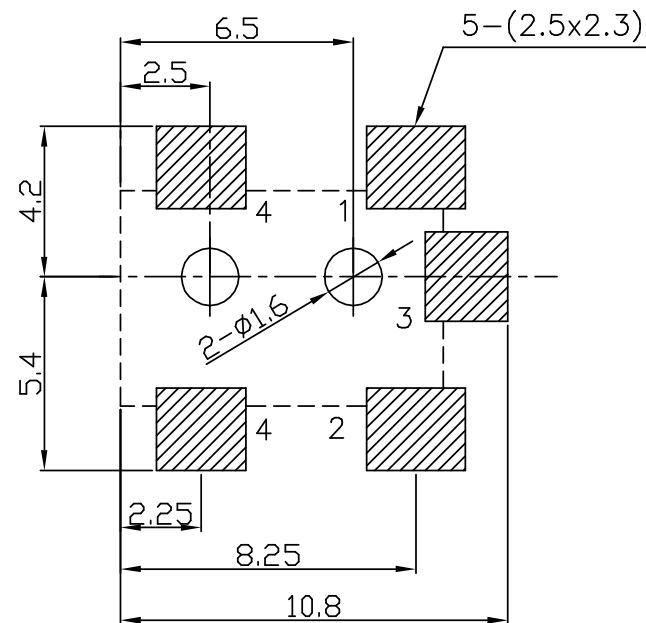
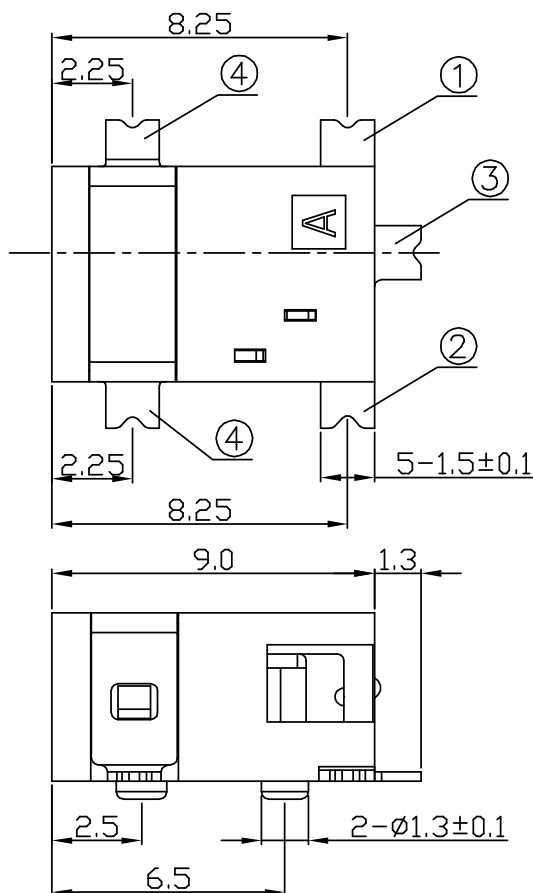
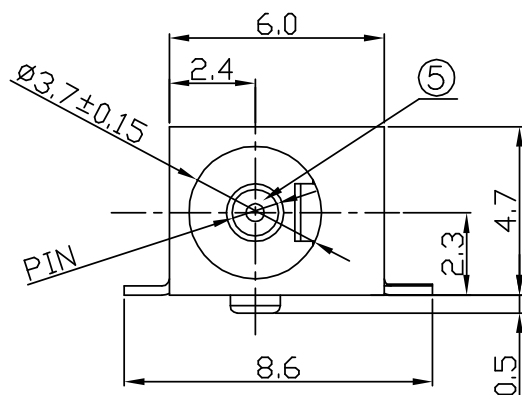


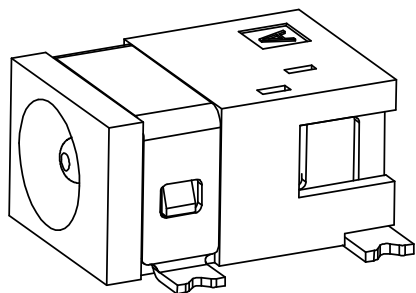

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)

SCHEMATIC		
CAT NO.	PIN	
DCJ-W24H4A35-10	$\phi 1.0$	1
DCJ-W24H4A35-13	$\phi 1.3$	2

6	HOUSING	1	PA9T	UL-94V0(BLACK)
5	PIN	1	H59(COPPER ALLOY)	Cu/Sn PLATED
4	TERMINAL 4#	1	C2680 t=0.25	Ag PLATED
3	TERMINAL 3#	1	C2680 t=0.25	Ag PLATED
2	TERMINAL 2#	1	C5191 t=0.30	Ag PLATED
1	TERMINAL 1#	1	C2680 t=0.25	Ag PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.2

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DCJ-W24H4A-xx-LF
SERIES
90°SMT
LEADFREE
10:1.00
13:1.30
A TYPE
HIGH 4.7mm
POST 2.5+4.0mm

DESCRIPTION: DC POWER JACK