
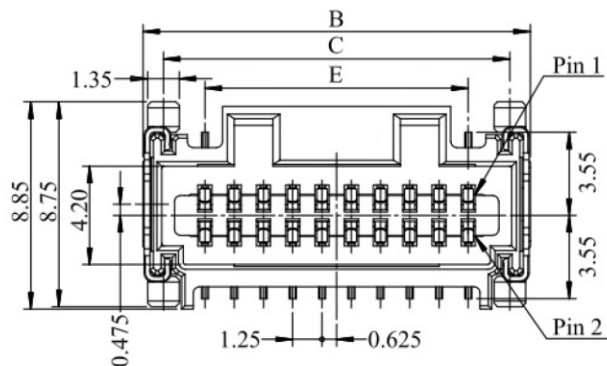
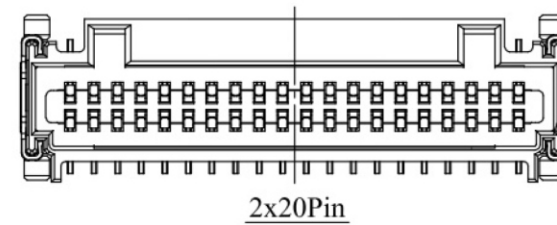
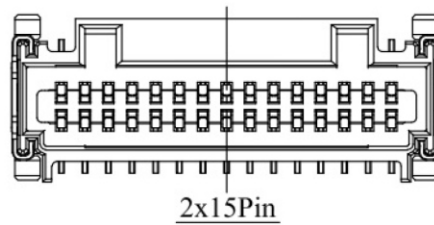
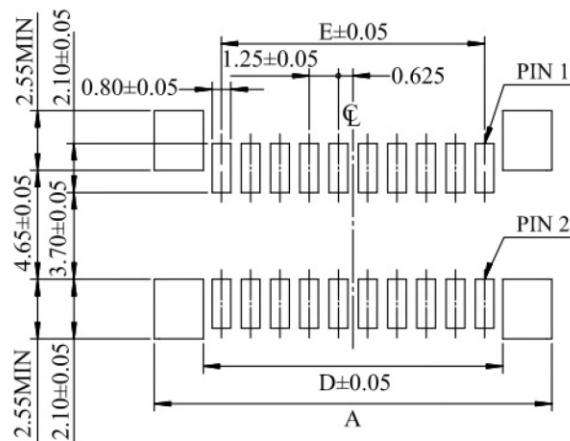
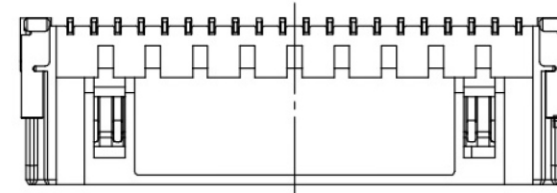
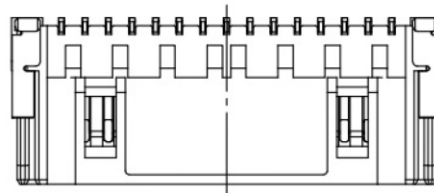


- Specifications(规格):
 Voltage rating(额定电压): 50V AC / DC
 Current rating(额定电流): 1A AC / DC
 Withstanding voltage(耐压值): 500V AC/minute
 Temperature range(工作温度): -25°C~+85°C
 Insulation resistance(绝缘电阻): $\geq 500M\Omega$
 Contact resistance(接触电阻): $\leq 20m\Omega$
 After environmental testing(环境测试后): $\leq 30m\Omega$

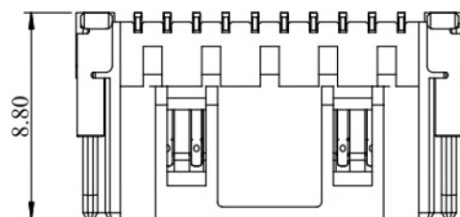

Poles	Dimensions (mm)					
	A	B	C	D	E	F
20	17.00	16.55	14.80	12.80	11.25	4.50
30	23.25	22.80	21.05	19.50	17.50	10.75
40	29.50	29.05	27.30	25.30	23.75	17.00

RECCOMENDED P.C.B.PATTERN LAYOUT

DCL125-VX-xx	PA6T UL94V-0	Brass	Contact Area Gold:3U	DCL125-H-xx	400Pcs
PART N0	Material(Wafer And Cap)	Material(Pin And Solder Tabs)	Finish(Pin And Solder Tabs)	Mates With Housing	Q' ty/Reel

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
 .X $\pm$ 0.30
 .XX $\pm$ 0.20
 .XXX $\pm$ 0.10
 ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

DCL125-VX-xx-LF

SERIES

LEADFREE

20,30,40 WAY

NON POST

180°SMT

DESCRIPTION: