
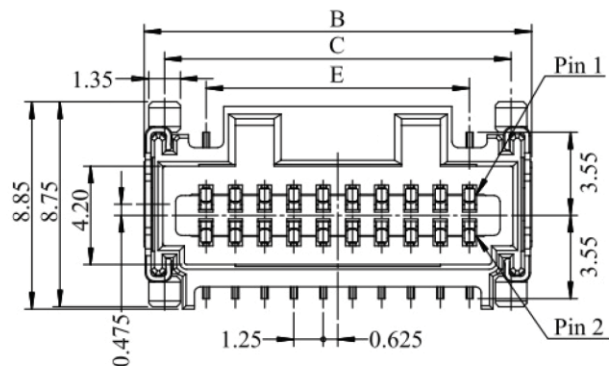
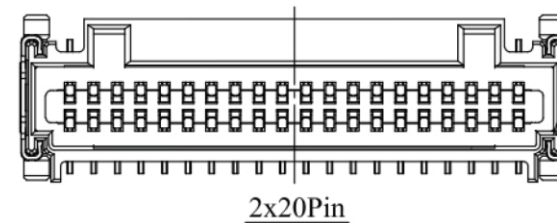
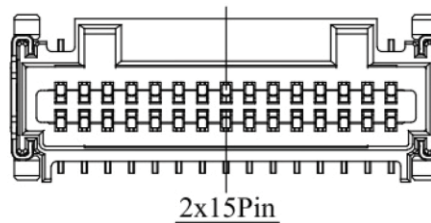
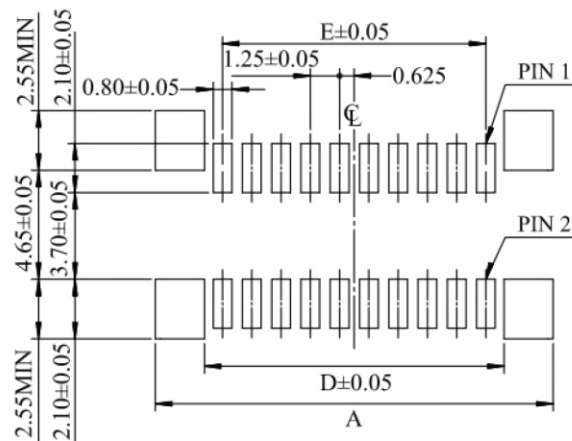
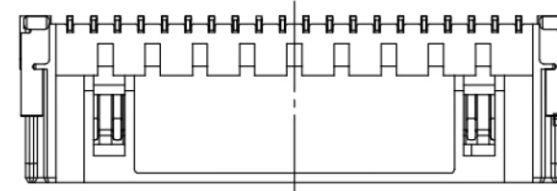
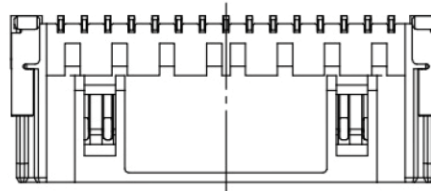


- Specifications(规格):
 Voltage rating(额定电压): 50V AC / DC
 Current rating(额定电流): 1A AC / DC
 Withstanding voltage(耐压值): 500V AC/minute
 Temperature range(工作温度): -25°C~+85°C
 Insulation resistance(绝缘电阻): $\geq 500M\Omega$
 Contact resistance(接触电阻): $\leq 20m\Omega$
 After environmental testing(环境测试后): $\leq 30m\Omega$

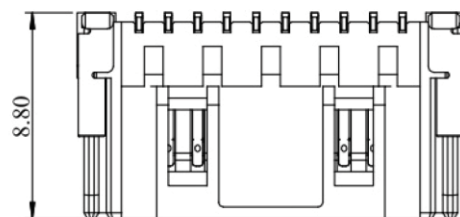

Poles	Dimensions (mm)					
	A	B	C	D	E	F
20	17.00	16.55	14.80	12.80	11.25	4.50
30	23.25	22.80	21.05	19.50	17.50	10.75
40	29.50	29.05	27.30	25.30	23.75	17.00

RECCOMENDED P.C.B.PATTERN LAYOUT

DCL125-VXR-xx	PA6T UL94V-0	Brass	Contact Area Gold:3U	DCL125-H-xx	400Pcs
PART N0	Material(Wafer And Cap)	Material(Pin And Solder Tabs)	Finish(Pin And Solder Tabs)	Mates With Housing	Q' ty/Reel

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1 : 1
 DATE
 SIZE A4 PPOJECTION

TOLERANCES ARE




X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.10
 ANG ±

照片框

ORDER INFORMATION

DCL125-VXR-xx-LF
 SERIES
 LEADFREE
 20.30.40 WAY
 REEL
 NON POST
 180°SMT

DESCRIPTION:

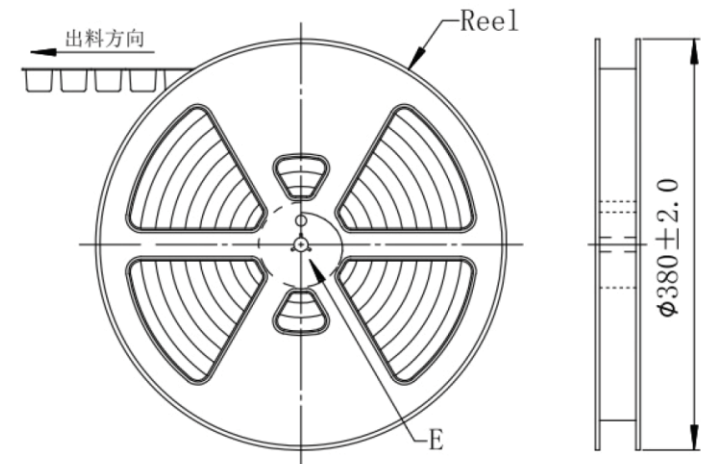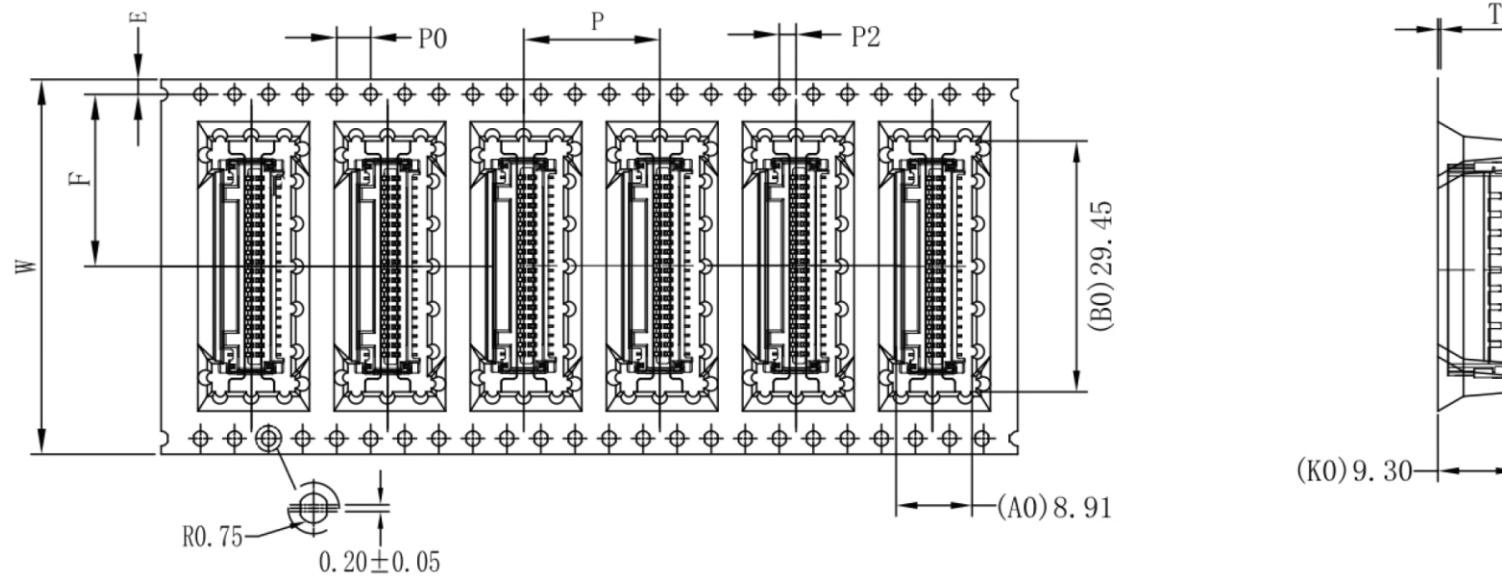

DCL125-VXR-xx	Nylon 6T UL94V-0	Brass	Contact Area Gold: 1U	400Pcs
PART NO	Material(Wafer And Cap)	Material(Pin And Solder Tabs)	Finish(Pin And Solder Tabs)	Q' ty/Reel

Poles	Dimensions (mm)			
	A	B	C	D
20	32.00	14.20	33.40	37.40
30	44.00	20.20	45.40	49.40
40	44.00	20.20	45.40	49.40

W	T	A0	A1	B0	B1	K0	K1	项目
44.00 ^{+0.3} _{-0.3}	0.50 ^{+0.05} _{-0.05}	8.91 ^{+0.1} _{-0.1}	0.00 ^{+0.1} _{-0.1}	29.45 ^{+0.15} _{-0.10}	0.00 ^{+0.15} _{-0.10}	9.30 ^{+0.15} _{-0.15}	0.00 ^{+0.15} _{-0.15}	尺寸
P	F	E	D0	D1	P0	P2		项目
16.00 ^{+0.1} _{-0.1}	20.2 ^{+0.1} _{-0.1}	1.75 ^{+0.1} _{-0.1}	1.50 ^{+0.1} _{-0.1}	0.00 ^{+0.0} _{-0.0}	4.00 ^{+0.1} _{-0.1}	2.00 ^{+0.1} _{-0.1}		尺寸

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

DCL125-VXR-xx-LF

SERIES

LEADFREE
20.30.40 WAY
REEL
NON POST
180°SMT

DESCRIPTION: