




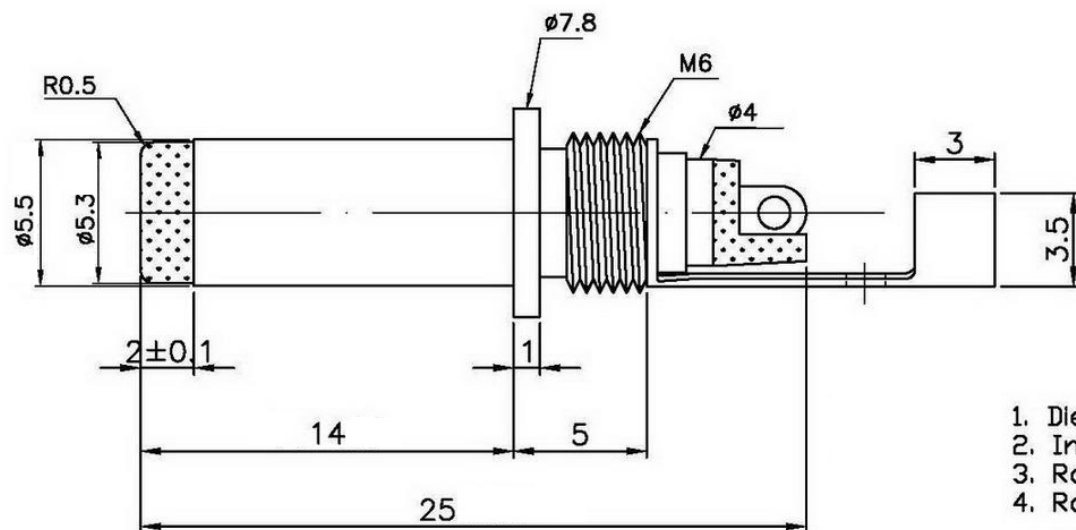

5	PVC BLACK
4	BRASS NICKEL
3	P-BRONZE NICKEL
2	BRASS NICKEL
1	PBT BLACK
NO	CONTENT



1. Dielectric strength: AC 500V at 1minute.
2. Insulation resistance: DC 500V/100M Ohms min.
3. Rated voltage: 20V DC.
4. Rated current: 7A.

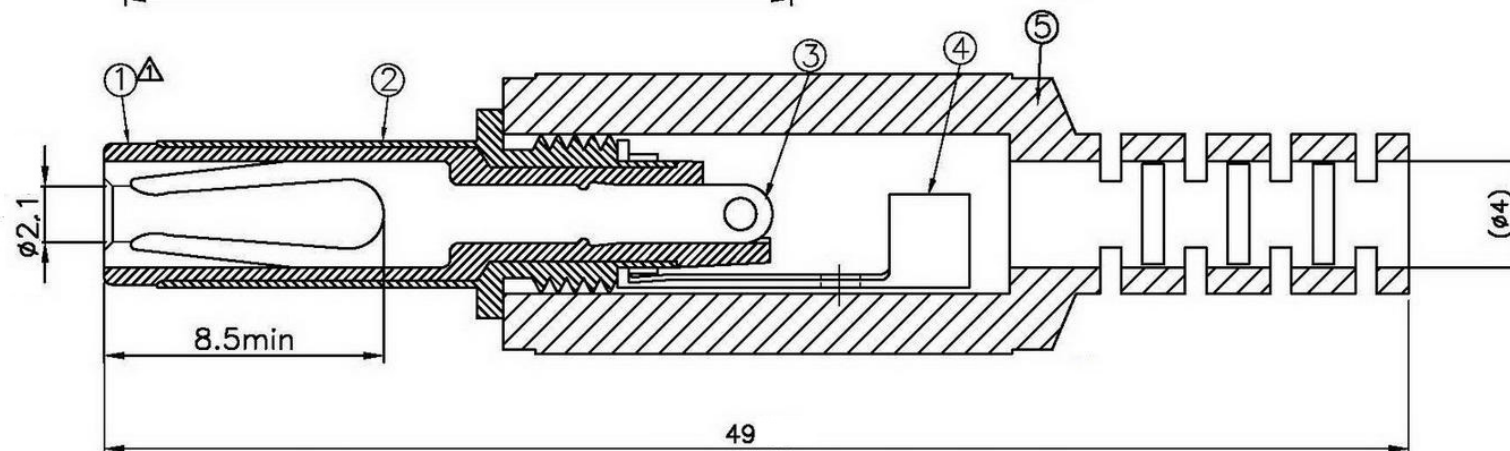

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DCP-A-5521Y-LF
SERIES | | | LEADFREE
| | | Y CONTACT
| | | ID:2.1Ø
| | | OD:5.5Ø
ASSEMBLY

DESCRIPTION: DC PLUG Ø5.5*Ø2.1*14.0L