




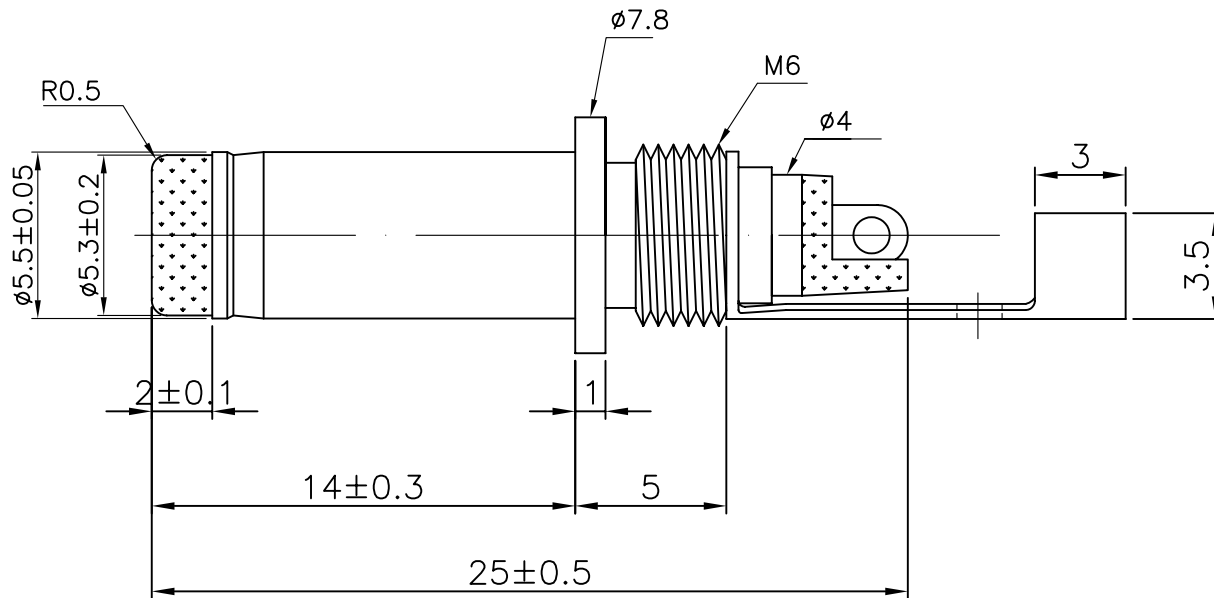

1. Dielectric strength: AC 500V at 1minute.
2. Insulation resistance: DC 500V/100M Ohms min.
3. Rated voltage: 20V DC.
4. Rated current: 7A.

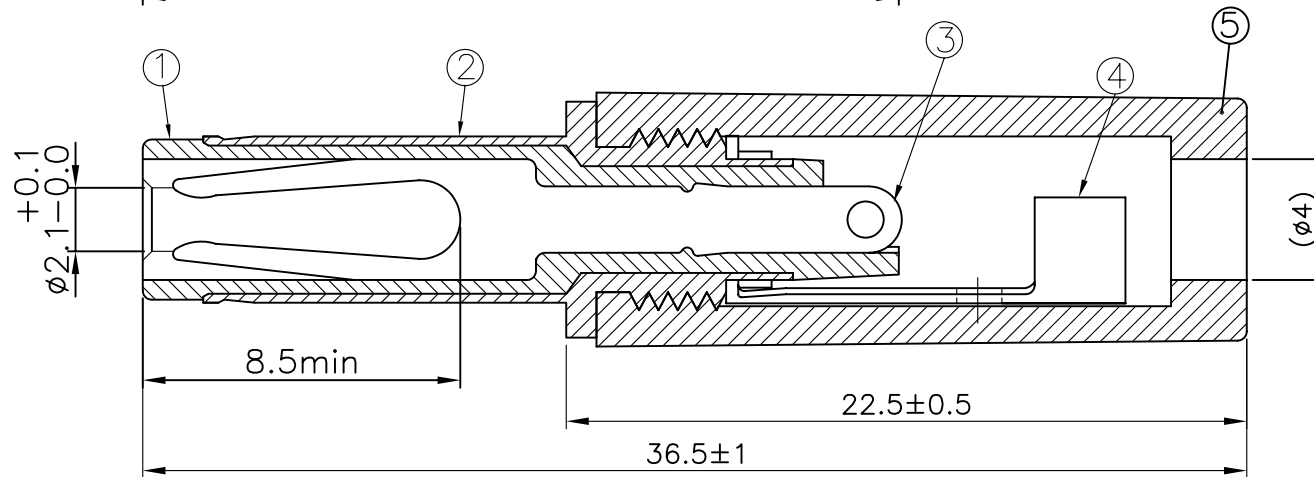

5	ABS BLACK
4	BRASS NICKEL
3	P-BRONZE NICKEL
2	BRASS NICKEL
1	PBT BLACK
NO	CONTENT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

DCP-A-5521YS-LF
SERIES ID: 2.1 Ø
LEADFREE
SHORT
Y CONTACT
OD: 5.5 Ø
ASSEMBLY

DESCRIPTION: DC PLUG 5.5*2.1*14.0L ASSEMBLY TYPE