
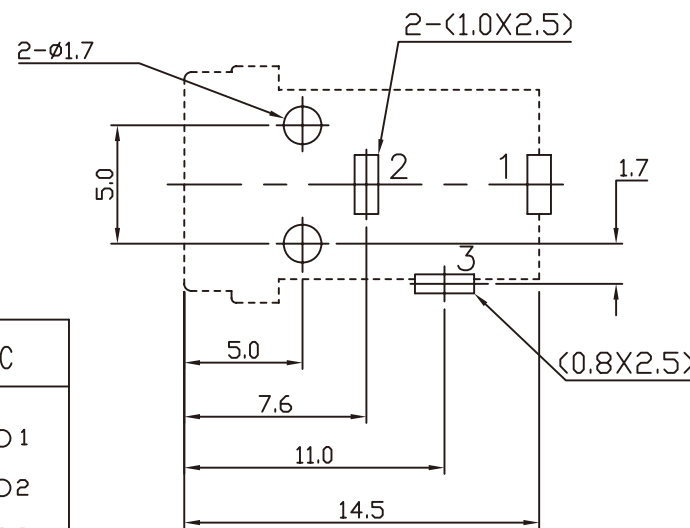

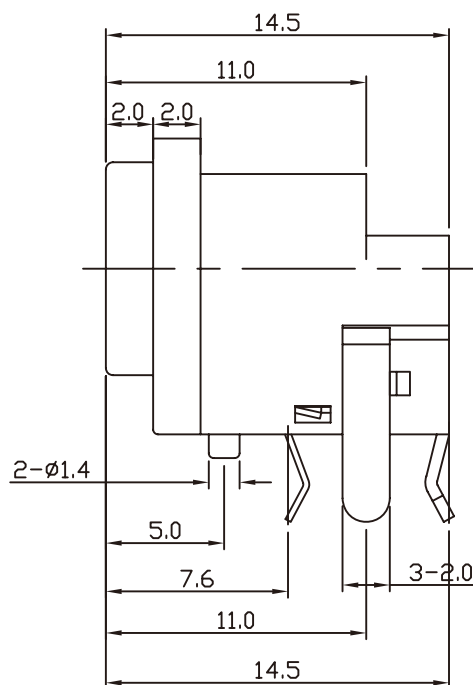
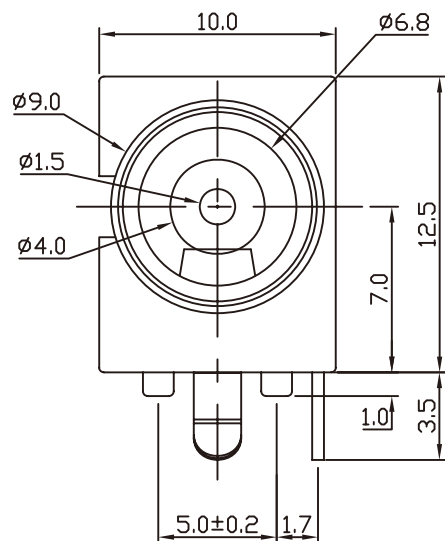
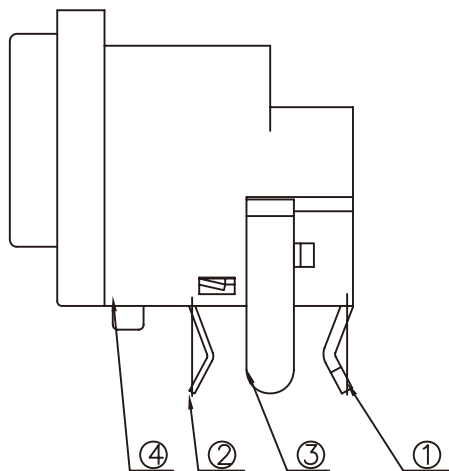


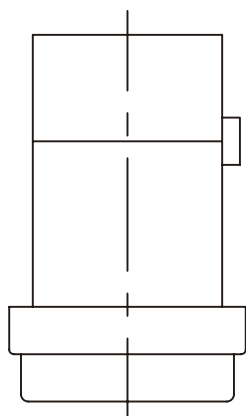

T:1.6 Dimensions of PC board holes
Tolerance : ± 0.05 (Printed-top view)

UNLESS OTHERWISE SPECIFIED, TOLERANCE ON DECIMAL: ± 0.3

4	HOUSING	1	PBT4815	UL-94V0(BLACK)
3	TERMINAL	1	C2680 t=0.50	Ag PLATED
2	TERMINAL	1	C5191 t=0.25	Ag PLATED
1	TERMINAL	1	C5191 t=0.50	Ag PLATED
LTR	PART NAME	QTY	MATERIAL	REMARK

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$



ORDER INFORMATION

DCP-R3010-145-LF

SERIES
LEADFREE
1.45Ø
WIDTH 10.0mm
POST 3.0mm
DIP 90°

DESCRIPTION: DC POWER JACK