


ELECTRICAL SPECIFICATION:
 1.100% OPEN SHORT&MISS WIRE TEST
 2.VOLTAGE:DC 300V
 3.INSULATOR RESISTANCE:2M OHM MIN
 4.CONDUCTIVE RESISTANCE:5 OHM MAX

No.	NAME	DESCRIPTION	Q' TY
①	CONNECTOR	DC 5521 JACK;NICKEL PLATED	1PC
②	PVC	45P PVC RoHS;BLACK COLOR	10G
③	WIRE	UL1007 22AWG OD :1.6MM ;RED COLOR;L=125MM	1PC
④	WIRE	UL1007 22AWG OD :1.6MM ;BLACK COLOR;L=125MM	1PC
⑤	H. S. T	HEAT SHRINKABLE TUBE OD:1.5MM BLACK;L=12MM	2PCS
⑥	WIRE	UL1571 28AWG OD :0.9MM ;BLACK COLOR;L=24MM	2PCS
⑦	HOUSING	SH-H-03 PITCH 1.0 3PIN HOUSING, WHITE COLOR	1PC
⑧	TERMINAL	SH-T-28 1.0 TERMINAL , NICKEL-PLATED	2PCS

WIRING DIAGRAM

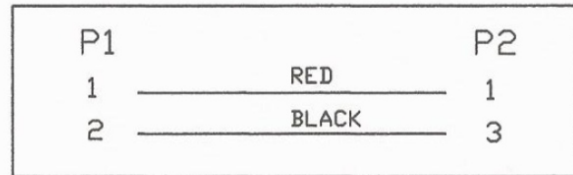

RoHS Compliant

TOLERANCES ARE



DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

P PROJECTION

照片框

ORDER INFORMATION

DCSH-200322-F16C-LF

SERIES | LEADFREE
 | 160mm
 | FEMALE TO FEMALE
 | 22 AWG
 | 2.00 TO 03 WAY

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com