


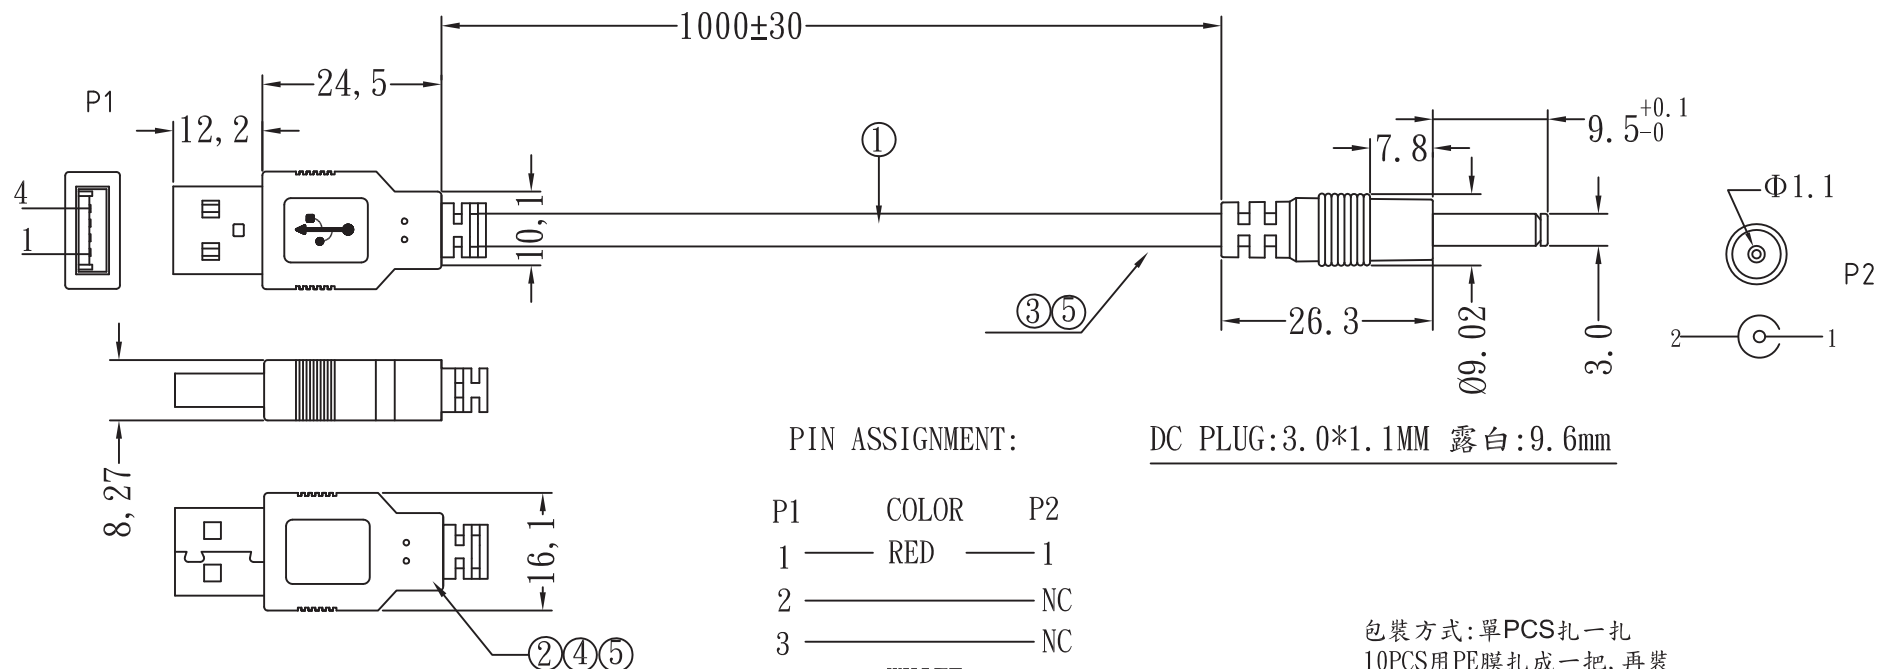


成品100%做導通測試
測試條件依據如下:
1. 絕緣阻抗: 10MΩ
2. 接觸阻抗: 5Ω
3. 高壓測試: 200V

包裝方式: 單PCS扎一扎
10PCS用PE膜扎成一把, 再裝
入紙箱內. 裝箱量自定.

NOTES: UNLESS OTHERWISE SPECIFIED (注意: 重點詳細說明)

序號	材料規格及用量	數量
1	UL 2464 22#2C+過粉 OD=4.0MM COLOR: BLACK	1PCS
2	4P USB PLUG "A/M" TYPE PBT: WHITE	1PCS
3	MOLDING PVC 45P 黑色膠料	8G
4	PE內模料 透明白	6G
5	DC PLUG: (外) 3.0* (內) 1.1MM PBT: BLACK 成型露白: 9.6mm	1PCS

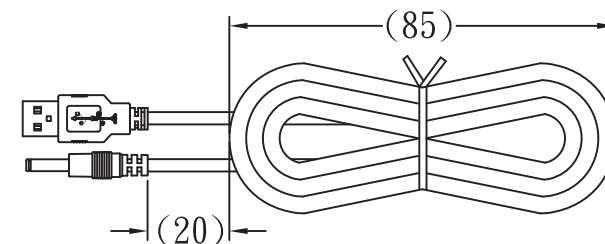

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DCUB-104A22-M1M-LF

SERIES

LEADFREE


1000mm

MALE TO MALE

22AWG

1.10 TO 4 PIN A TYPE

DESCRIPTION:

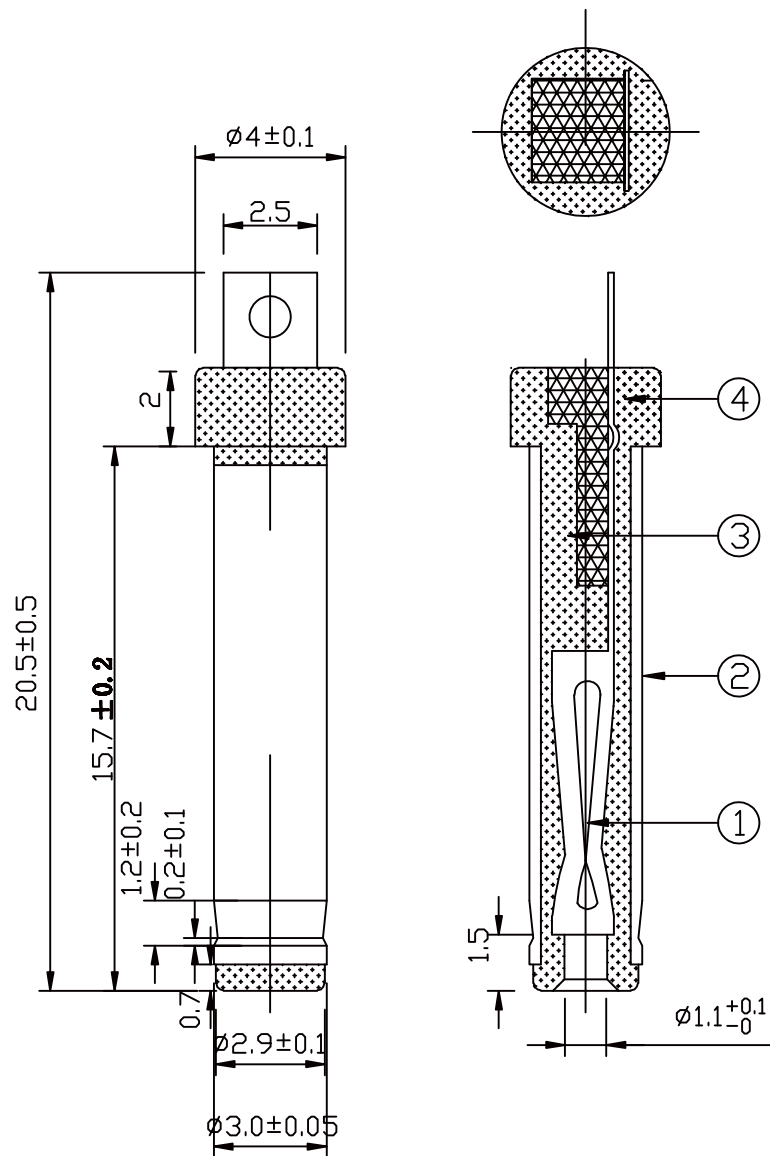

5	绝缘体	PBT		
4	后塞	POM		1
3	外管	黄铜		1
2	音叉片	磷铜		1
1				1
项目	零件名称	材料	处理	数量

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



照片框

ORDER INFORMATION

DCUB-104A22-M1M-LF

SERIES

LEADFREE

1000mm

MALE TO MALE

22AWG

1.1Ø TO 4 PIN A TYPE

DESCRIPTION: ø3.0×1.1×20.5 音叉叉沟