


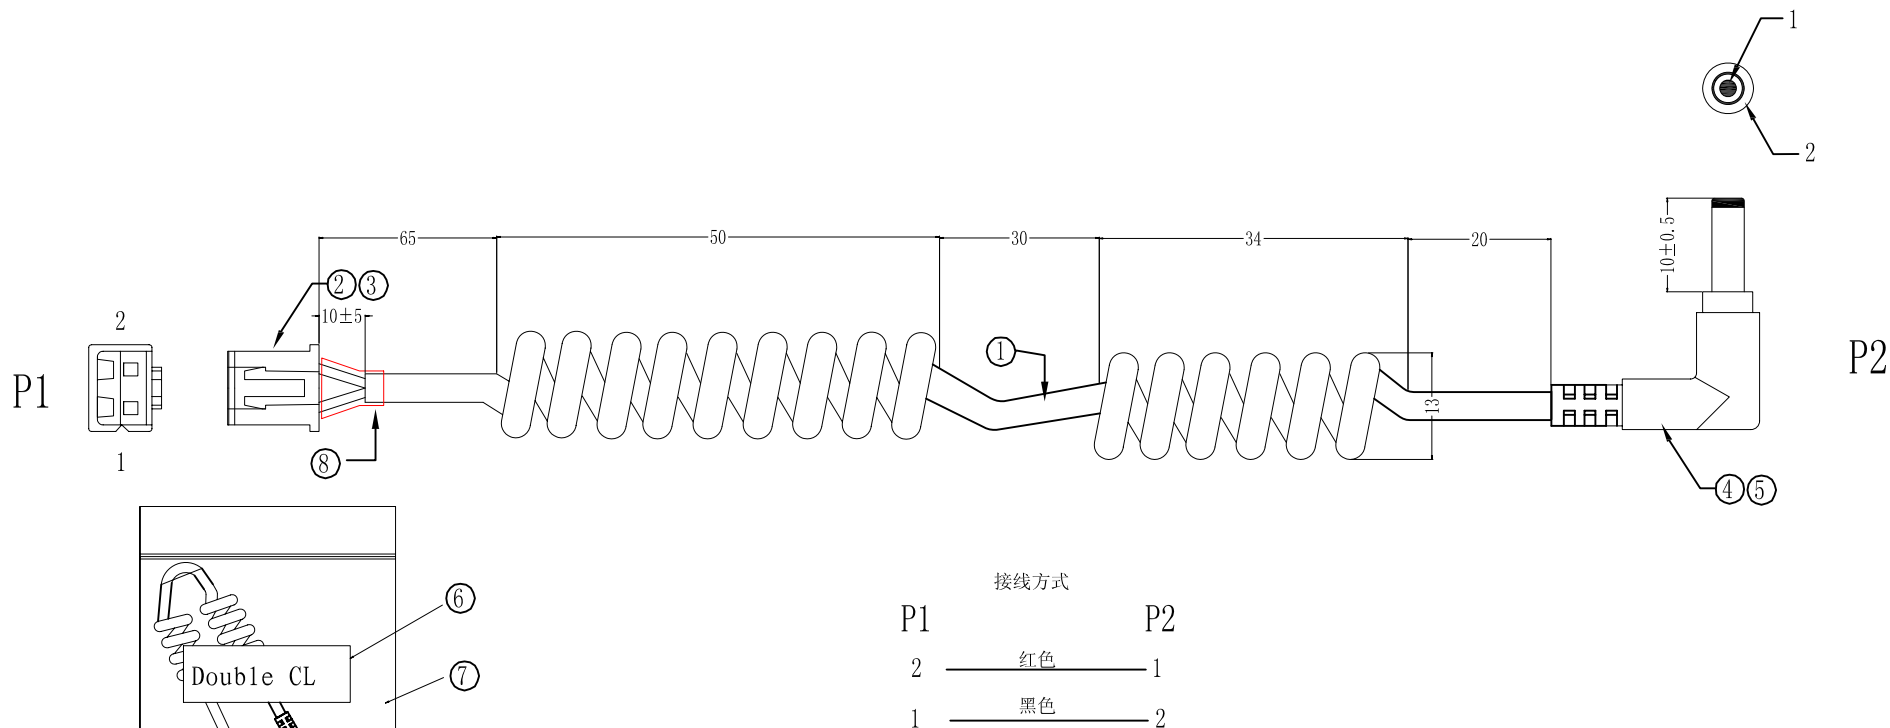

NOTES: UNLESS OTHERWISE SPECIFIED.

備注：(除非特別注明，否則完全依此規格)

- TEST CABLE TO 45° IN FOUR DIRECTION,
成品搖擺測試：分四個方向“北、南、東、西”的順序
(NORTH, SOUTH, EAST, WEST) FOLLOWED BY HI-POT.
做 45 度搖擺測試.
- CABLE ASSEMBLY TEST OPEN SHORT AND MISWIRE.
成品要求測試開路、短路和錯位.
 - CONNECTION RESISTANCE: 5 ohms MAX/導通電阻: 5 ohm(最大);
 - INSULATION RESISTANCE: 10M ohms MIN/絕緣電阻: 10M ohm(最小);
 - HI-POT TEST VOLTAGE 300V DC / 10ms/高壓測試300伏DC/10ms.

8	1PC		ø4.0mm White Heat Shrink Tubing L=20mm
7	1PC		Transparent PE-Bag
6	1PC		see the Drawing
5	15.8g		shore A 90 Black PVC
4	1PC		DC PLUG 5.5*2.5
3	1PC		XH-H-02
2	2PCS		XH-T-22
1	PC		NON H05ZIZ1-F 24AWG(17/0.15BC)*2C PCV白色 OD:4.0±0.1MM
ITEM	QTY	MFG.	DESCRIPTION

CABLE ASSEMBLY PARTS LIST

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ± 0.35
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

DCXH-25R0224CC1-E20-LF

SERIES

LEADFREE
200mm
MALE TO FEMALE
COIL CORE
24 AWG
2.5Ø 90° TO 02WAY

DESCRIPTION: XH-H-02 TO DC5525 彈簧線