
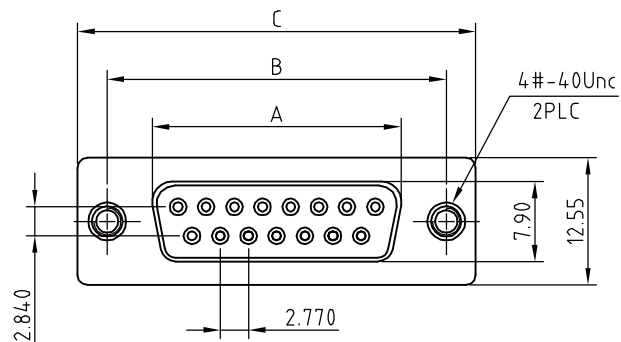


Recommend Layout PCB.

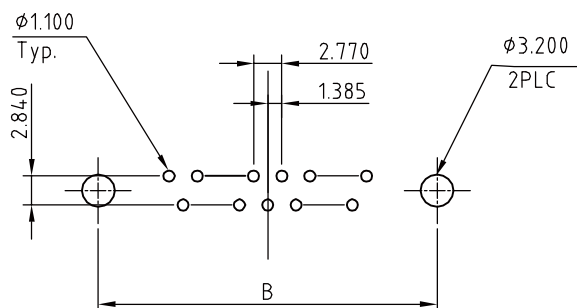

ELECTRICAL CHARACTERISTICS

Contact Current Rating:3Amperes.

Dielectric Withstanding Voltage:AC 500V at sea level.

Insulation Resistance:1000Megohms Min.

Contact Resistance:30Milliohms Max.

Operation Temperature : -55°C to +105°C.

Material

Contact :Copper Alloy.

Insulator:PBT.

Shell: SPCC.

Screw: Copper Alloy.

Boardlock: Copper Alloy

Note:

No.	A	B	C	D
09	16.33	24.99	30.81	19.23
15	24.66	33.32	39.14	27.56
25	38.38	47.04	53.04	41.28
37	54.84	63.50	69.32	57.33

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

PPOJECTION



ORDER INFORMATION

DD-SGZ075-xx-LF
SERIES
LEADFREE
09~37WAY
HIGH 7.5mm
Z-BRACKET
FULL GOLD
FEMALE

DESCRIPTION: D-SUB Female 180D- DIP