
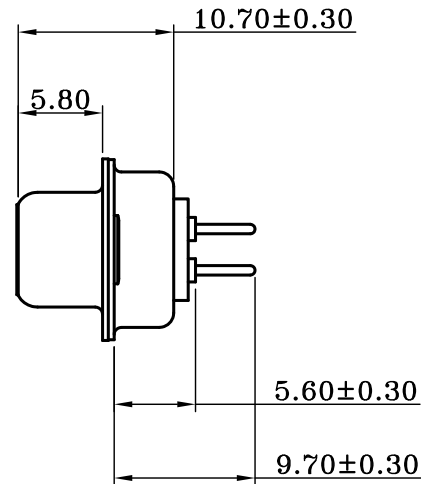
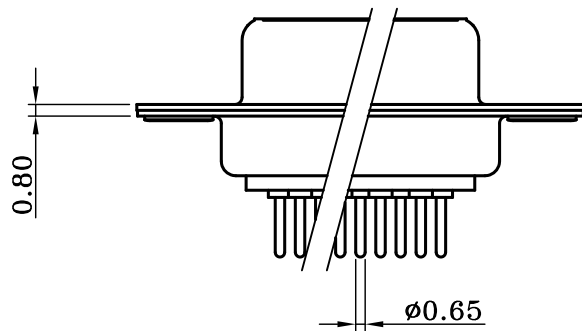


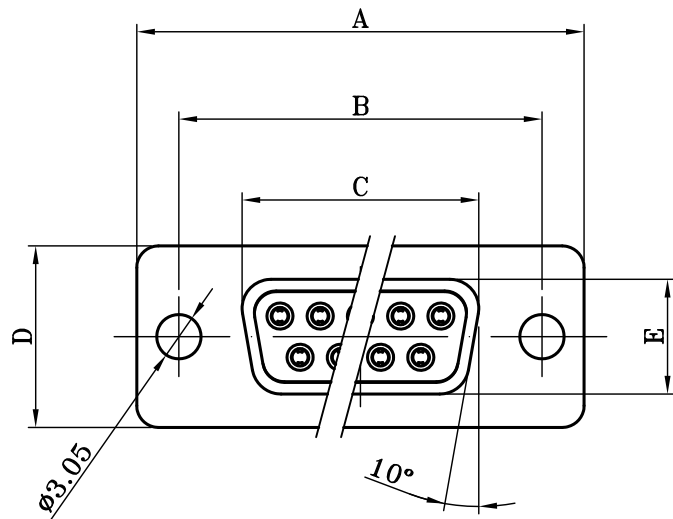

MATERIALS AND FINISH

SHELL: STEEL MATERIAL, FRONT SHELL TIN FINISHED
BACK SHELL TIN FINISHED
DIMPLES ON PLUG ONLY

INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED,
UL 94V-0 RATED, BLACK COLOR

CONTACT: PRECISION MACHINED COPPER ALLOY
GOLD PLATED

ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING : 5.0 A
CONTACT RESISTANCE : 10 mΩ MAX.
DIELECTRIC WITHSTANDING VOLTAGE : 1000 V AC MIN.
INSULATION RESISTANCE : 5GΩ MIN.
TEMPERATURE RATING : -55°C ~ +125°C

POS.	A	B	C	D	E
09	30.80	25.00	16.30	12.50	8.30
15	39.20	33.30	24.60	12.50	8.30
25	53.05	47.05	38.40	12.50	8.30
37	69.40	63.50	52.20	12.50	8.30

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 5°

PPOJECTION




ORDER INFORMATION

DDL-S-xx-LF
SERIES | T LEADFREE
09~37 WAY
FEMALE


DESCRIPTION:

09 POS.

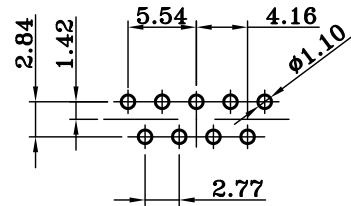


P.C.B LAYOUT

15 POS.

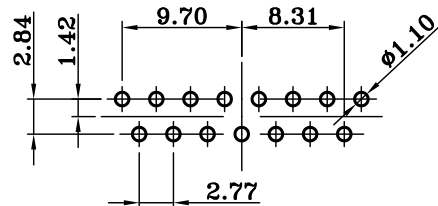


P.C.B LAYOUT

37 POS.

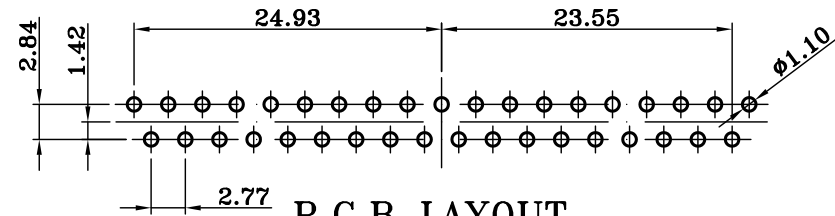

P.C.B LAYOUT

25 POS.

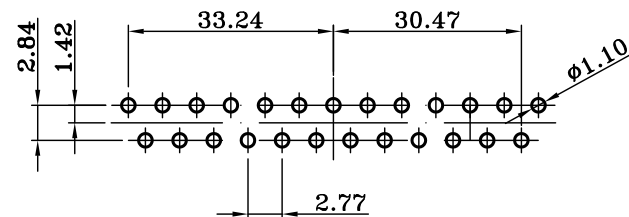

P.C.B LAYOUT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.40


.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ± 5°

PPOJECTION



ORDER INFORMATION

DDL-S-xx-LF
SERIES | LEADFREE
09~37 WAY
FEMALE

DESCRIPTION: